


WAVES SERIES
WAVES AND SCATTERING SET

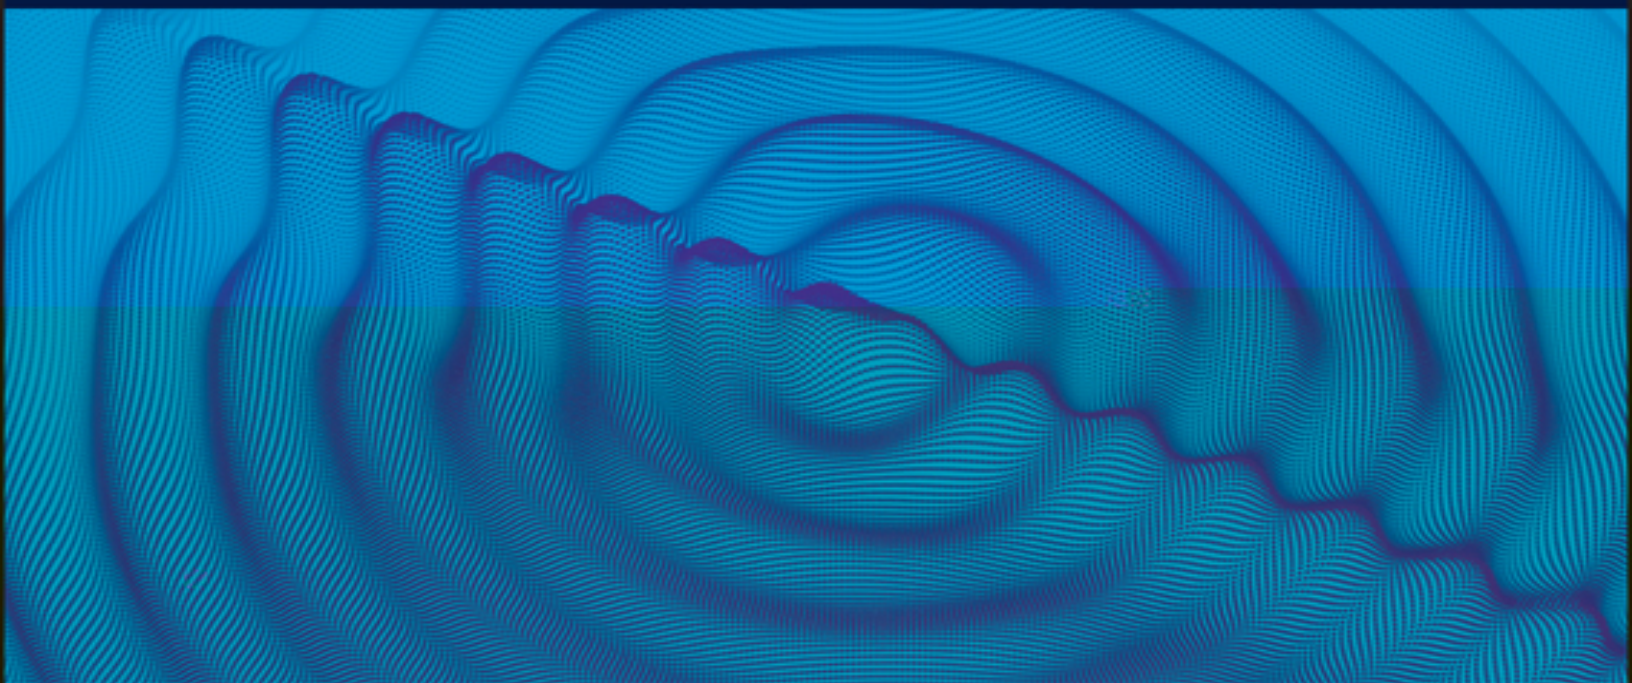

Volume 3

**Advanced Studies in
the Mathematical Theory
of Scattering**

Jean-Michel L. Bernard

ISTE

WILEY

Table of Contents

[Cover](#)

[Table of Contents](#)

[Dedication Page](#)

[Title Page](#)

[Copyright Page](#)

[Introduction](#)

[1 A Global Method for the Scattering by a Multimode Plane with Arbitrary Primary Sources and Complete Series with Error Functions](#)

[1.1. Introduction](#)

[1.2. Potentials, reflection coefficients and multimode boundary conditions](#)

[1.3. Incident potentials \(\$E_i\$, \$H_i\$ \) for arbitrary bounded primary sources](#)

[1.4. Scattered potentials \(\$E_s\$, \$H_s\$ \) for arbitrary primary sources](#)

[1.5. When primary sources \$J\$ and \$M\$ are arbitrarily oriented dipoles](#)

[1.6. Integral reduction of \$J_g\$ and exact remarkable expansion with error functions](#)

[1.7. Asymptotic expansion of \$J_g\$ with complementary error functions](#)

[1.8. Forward and backward guided waves](#)

[1.9. References](#)

[1.A. Appendix A: complex spectral properties](#)

[1.B. Appendix B: some equalities derived from \(1.4\) and \(1.11\).](#)

1.C. Appendix C: other types of bounded sources

1.D. Appendix D: some miscellaneous results on $J_g(\rho, -z)$ and $W_m(s)$.

2 Diffraction by an Impedance Curved Wedge with Arbitrary Angle and Uniform Higher Order Asymptotics

2.1. Introduction

2.2. Higher order asymptotics in the region without creeping waves terms

2.3. Several orders asymptotic expressions in a region with creeping waves terms

2.4. Some developed expressions concerning for arbitrary wedge angle

2.5. Rewriting the field with fringe waves of second order

2.6. References

2.A. Appendix A: on an integral expression with asymptotic kernel for the field near tangence of faces at $\varphi = \pm\Phi$, permitting an explicit transition at arbitrary order

2.B. Appendix B: first-order asymptotic of transition integral above tangent faces

2.C. Appendix C: regularity of a sum of residues at coalescent poles

2.D. Appendix D: analytical expression of u_{OGa} from behavior at reflection poles of f

3 Spectral Equations for Scattering by Impedance Polygons: Properties and Solutions

3.1. Introduction

3.2. Generalities

3.3. Single-face expression of f for a scatterer enclosed by a surface with two semi-infinite

polygonal faces

3.4. Polygonal surface with impedance boundary conditions

3.5. Formulation of the three-part polygonal problem: spectral functions in Sommerfeld-Maliuzhinets representation and functional difference equations in complex plane

3.6. The integral expressions and integral equations for the three-part impedance polygon

3.7. Existence and uniqueness for the integral equations on C_ϵ

3.8. Some particular features of the system of integral equations for the three-part impedance polygon and their consequences

3.9. Exact first order expressions for a small complex cavity in a step, when $\Phi_b = -\Phi_a$ and $\sin \theta_+ = \sin \theta_-$

3.10. References

3.A. Appendix A: About and the solution for an impedance wedge

3.B. Appendix B: principle of semi-inversion for our system of integral equations

3.C. Appendix C: uniqueness of fields when impedance boundary conditions on piecewise regular geometry

3.D. Appendix D: asymptotics for $R_a(\alpha)$ and $R_b(\alpha)$ taking account of complex poles

3.E. Appendix E: the scattering diagram from the solutions of the integral equations

3.F. Appendix F: approximated second-order ameliorations for small cavity

4 Advanced Properties of Spectral Functions in Frequency and Time Domains for Diffraction by a Wedge-shaped Region

4.1. Introduction

4.2. Basic properties of spectral function in Sommerfeld-Maliuzhinets representation

4.3. Spectral function attached to radiation of a single face and properties

4.4. Far-field radiation of one face and single-face expression of spectral function f

4.5. Expression of f from the far field function F and its consequences

4.6. The spectral function $f_0(\alpha)$ for the diffraction by a wedge, with passive or active impedance faces, and an illumination normal to the edge

4.7. Analysis for a wedge at skew incidence (2D1/2) and associated special functions

4.8. Explicitly causal expression in time domain for a dispersive wedge-shaped region

4.9. References

4.A. Appendix A: analysis of the solution of $s(\alpha \pm \Phi)$, $-\varepsilon s(-\alpha \pm \Phi) = S_{\pm}(\alpha)$

4.B. Appendix B: analysis of the reflection coefficient attached to a multilayered face of a wedge

4.C. Appendix C: some miscellaneous properties of spectral functions for an impedance wedge with passive impedance faces

4.D. Appendix D: functional equations of high order and behavior of fields at the edge

4.E. Appendix E: on the poles of for the evaluation of van

5 General Integral Identities for Bianisotropic Media and Related Equations, Properties and Coupling Expressions

5.1. Introduction

5.2. General integral identities for piecewise continuous media with finite losses

5.3. Generalized reciprocity theorem and associated fields properties

5.4. Generalized reciprocity principle and dyadic tensors fields

5.5. Fields influenced by a perturbation A of a bianisotropic object

5.6. Fields influenced by coupling between two scatterers A and A'

5.7. Application to the numerical removal of couplings

5.8. Numerical results

5.9. References

5.A. Appendix A: on some identities for conjugate fields

5.B. Appendix B: on some identities for surface integrals

5.C. Appendix C: note on distributions and some integrals expressions

5.D. Appendix D: integral expressions and equations when S is piecewise smooth

6 Exact and Asymptotic Reductions of Surface Radiation Integrals with Complex Exponential Arguments to Efficient Contour Integrals

6.1. Introduction

6.2. Formulation

6.3. A combination of two fundamental ways for an efficient reduction to a contour integral

6.4. Reduction to contour integrals in case (a) for a pure dipolar illumination of a large perfectly conducting flat plate

6.5. Reduction to contour integrals in case (a) for a weighted dipolar illumination of a large perfectly conducting flat plate

6.6. Definition of complex scaling in case (b) and elementary exact surface integral reduction

6.7. Complex scaling and extended cases of applications for exact reductions

6.8. Complex scaling and applications to asymptotic reductions

6.9. Reduction in case (c) for surface radiation integrals on curved plates

6.10. Miscellaneous results

6.11. Numerical results

6.12. References

6.A. Appendix A: primitives for theorems 6.5 and 6.6, and properties

6.B. Appendix B: reduction of physical optics surface integrals to contour integrals in bistatic case and quadratic approximation of exponential arguments

6.C. Appendix C: reduction of physical optics radiation integrals in monostatic case for an imperfectly conducting flat plate

6.D. Appendix D: particular uses of asymptotics with theorems 6.1 and 6.2

6.E. Appendix E: complements on the use of proposition 6.2 for γ , when we have γ and $g(\mathbf{r}')$ is a

[**smooth analytical function on \$S'\$**](#)

[6.F. Appendix F: complements on theorem 6.19 for some complicated case](#)

[6.G. Appendix G: some equalities in relation with proposition 6.11](#)

[Index](#)

[Other Title](#)

[End User License Agreement](#)

List of Illustrations

Chapter 1

[**Figure 1.1** Geometry: sources \(J, M\) and observation point above the plane \$z = 0\$](#)

[**Figure 1.2** For \$\arg\(ik\) > 0\$ with , definitions of \$S, S'\$...](#)

Chapter 2

[**Figure 2.1** Complex path of integration](#)

[**Figure 2.2** Geometry of the curved impedance wedge](#)

Chapter 3

[**Figure 3.1** A polygonal surface in a wedge-shaped sector](#)

[**Figure 3.2** Complex path of integration](#)

[**Figure 3.3** Geometry of the three-part polygon](#)

[**Figure 3.4** Geometry of complex cavity in a step](#)

[**Figure 3.5** Complex step when \$\Phi_b = -\Phi_a\$ and \$\varphi' = \varphi - \Phi_b\$](#)

Chapter 4

Figure 4.1 Geometry for a wedge-shaped region

Figure 4.2 Complex path of integration

Figure 4.3 Geometry at skew incidence

Chapter 5

Figure 5.1 Radiation in the presence of unperturbated object

Figure 5.2 Radiation in presence of the system perturbed by A

Figure 5.3 Presence of perturbations A and A' ...

Figure 5.4 Coupling influence of A' on A

Figure 5.5 (a) and on S' for primary source at...

Figure 5.6 Comparison of results for different...

Chapter 6

Figure 6.1 Geometry and shift of the origin

Figure 6.2 Geometry of a curved plate S and its plane projection S'

Figure 6.3 Comparison of (a) surface and (b) contour integral terms...

Figure 6.4 Comparison of the surface and contour integrals with...

Figure 6.5 Geometry for the near-field RCS for source...

Figure 6.6 RCS for polarization VV at 1 m, comparison...

Figure 6.7 RCS for polarization VV and HH at 3.5 m ...

Figure 6.8 RCS VV at 100 m for (a) flat plate C1,2...

Figure 6.9 RCS VV and HH at 6 m, comparison of (a)...

Figure 6.10 RCS VV and HH at 6m, comparison of (a)...

Figure 6.11 RCS VV and HH at 3 m, comparison of (a)...

Figure 6.12 RCS VV and HH at 3 m, comparison of (a)...

Figure 6.13 Variation in purely concave cases with C_j ...

Figure 6.14 Purely convex cases with negative C_j and concave cases ...

Figure 6.15 RCS VV, comparison of (a) surface and (b) contour inte...

Figure 6.16 RCS VV, comparison of (a) surface and (b) contour ...

Dedicated to my wife



Waves and Scattering Set

coordinated by

Jean-Michel L. Bernard

Volume 3

Advanced Studies in the Mathematical Theory of Scattering

Jean-Michel L. Bernard

ISTE

WILEY

First published 2024 in Great Britain and the United States by ISTE Ltd and John Wiley & Sons, Inc.

Apart from any fair dealing for the purposes of research or private study, or criticism or review, as permitted under the Copyright, Designs and Patents Act 1988, this publication may only be reproduced, stored or transmitted, in any form or by any means, with the prior permission in writing of the publishers, or in the case of reprographic reproduction in accordance with the terms and licenses issued by the CLA. Enquiries concerning reproduction outside these terms should be sent to the publishers at the undermentioned address:

ISTE Ltd
27-37 St George's Road
London SW19 4EU
UK

www.iste.co.uk

John Wiley & Sons, Inc.
111 River Street
Hoboken, NJ 07030
USA

www.wiley.com

© ISTE Ltd 2024

The rights of Jean-Michel L. Bernard to be identified as the author of this work have been asserted by him in accordance with the Copyright, Designs and Patents Act 1988.

Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s), contributor(s) or editor(s) and do not necessarily reflect the views of ISTE Group.

Library of Congress Control Number: 2024940000

British Library Cataloguing-in-Publication Data

A CIP record for this book is available from the British Library

ISBN 978-1-78630-857-3

Introduction

This book is a collection of independent mathematical studies, describing the analytical reduction of complex generic problems in the theory of scattering and propagation of electromagnetic waves in the presence of imperfectly conducting objects. Their subjects are as follows:

- a global method for the scattering by a multimode plane;
- diffraction by an impedance curved wedge;
- scattering by impedance polygons;
- advanced properties of spectral functions in frequency and time domains;
- bianisotropic media and related coupling expressions;
- exact and asymptotic reductions of surface radiation integrals.

Each of our approaches can be qualified as analytical, when it leads to exact explicit expressions, or, as semi-analytical, when it drastically reduces the mathematical complexity of studied problems. Therefore, they can be used in mathematical physics and engineering, to analyze and model, as well as in applied mathematics, to calculate for a low computational cost, the scattered fields in electromagnetism.

All of these works derive from original methods initiated in our publications that we here detail, develop and extend.

The first chapter is devoted to original exact expressions of the diffraction by a multilayered plane that can be partly

composed of metamaterials. In whole generality, we then determine the fields as depending on potentials attached to arbitrary passive or active modes whose combination will give the passivity of the complete system. Our expressions directly take account of primary sources composed of electric and magnetic dipoles with arbitrary orientations, and profit of a novel exact development of incomplete Bessel function as an exact series of error functions. This latter characteristic permits a complete uniform analysis for arbitrary complex parameters, contrary to previous known results with error functions that were only approximations. Exact and complete asymptotics (at any order) are described, allowing us to particularly analyze the contribution of guided waves (forward and backward) at any distance.

The second chapter concerns the diffraction of an impedance wedge with curved faces of arbitrary angle that supports distinct surface boundary conditions of impedance type. We then distinguish the domains above and below the tangent planes at the edge. Our method permits an asymptotic evaluation at arbitrary order of curvatures of both faces for arbitrary passive impedance parameters. The uniformity at the crossing of the tangent plane is a characteristic remaining at arbitrary order, permitting us to analyze reflected, guided waves, edge-diffracted waves, but also waves originating from the edge that creep along the faces (creeping waves when faces are convex).

The diffraction in free space of a imperfectly conducting polygons (finite or with semi-infinite faces) is a particularly delicate problem that we study in third chapter, using Sommerfeld-Maliuzhinets integral representation of fields in a novel manner to rigorously consider several discontinuities, without any approximations. Indeed, contrary to common methods which consider large facets to admit asymptotic coupling between edges, we consider a

rigorous development valid for arbitrary dimensions of facets, by establishing novel spectral equations that we can solve exactly or asymptotically, from a novel analysis of properties of spectral functions. This is particularly permitted by using their single-face representations, which is perfectly adapted to directly consider boundary conditions on faces with piecewise smooth geometries, as in polygonal cases.

[Chapter 4](#) explores spectral functions in Sommerfeld-Maliuzhinets integral representation, their properties in the complex plane and new developments of them and special functions, attached to the resolution of multiple problems concerning the diffraction by a wedge with impedance boundaries conditions (passive or active). By beginning the study in frequency domain, we also analyze the representation of fields in time domain, in particular for an efficient explicit expression of causality in the case of dispersive (not constant relatively to frequency) multimode faces.

The fifth chapter analyzes the coupling influence between two imperfectly conducting objects in presence of a third one, all constituted by bianisotropic media. After beginning with developments of integral equalities, in particular, a generalized reciprocity one, we derive different properties of fields that will permit a complete analysis of coupling influences. We then give an example of application for an efficient and simple numerical post-process suppression of the influence of one object, that is, its direct but also its coupling contributions, on a second object.

We conclude this book with the determination of explicit contour integral expressions for an efficient evaluation of surface radiation integrals at arbitrary distance. This reduction concerns radiation of plane or curved plates of arbitrary contours, when the fields, highly oscillatory or

not, are analytically defined on them, which is particularly the case for physical optics radiation surface integrals, when the surface fields are defined in closed form from geometrical optics.

1

A Global Method for the Scattering by a Multimode Plane with Arbitrary Primary Sources and Complete Series with Error Functions

1.1. Introduction

In [1], we considered the field scattered by an arbitrary impedance plane in electromagnetism, and we here exploit this formalism to analyze the scattering by a structure composed of several homogeneous planar layers, with isotropy or uniaxial anisotropy, illuminated by arbitrary bounded sources. In this study, the plane is supposed to be either grounded, that is, a multilayer backed by an impedance plane, or not grounded, that is, a multilayer slab in free space; this will lead us to generalize our previous approach for a multilayer given in [2].

The field scattered of such structures is usually given by its plane wave expansion (Fourier representation) [3]-[6], which presents the particularity to have reflection coefficients that are meromorphic functions. Each one can be then modeled as a rational function with a set of N simple poles $\{-g_j\}_{j=1,\dots,N}$, which permits us to assume a multimode boundary condition of order N [2].

The Fourier expansion is well adapted in far field or for plane wave illuminations, but is not suitable for an analysis at any distance or for complex incident waves. Even when double Fourier integrals are reduced to single Fourier-Bessel integrals, calculation is lengthy and delicate because of functions in the integral that remain highly

oscillating and, most often in literature [3]-[9], analytic expansions are not strictly convergent but asymptotic. Besides, an additional difficulty comes from that, and in multimode case, we have to take into account that the constants g_j can have real parts of any sign, which signifies that passive but also active modes are present, even if the complete system is strictly passive.

In this frame, after expanding potentials into a combination of Fourier-Bessel integrals depending on each g_j , we are led to transform them to derive a more efficient integral representation, which is able to take account of active modes. Among other specificities, the definition of a parameter ε , attached to each pole, is then particularly important to permit complete exact and asymptotic series with error functions. These series allow us to exhibit guiding waves terms near and far from the sources above the multilayer, generalizing [1] and refining [2].

Otherwise, our approach, as in [1], uses a new representation of potentials for the incident field, which possesses the originality to directly consider arbitrarily oriented electric and magnetic primary currents sources. Thus, we have no more to solve separately the problem for vertical or horizontal dipolar source as commonly done in the literature for passive impedance planes [7]-[14], isotropic or uniaxial slabs [15]-[17] or multilayers [3]-[6], [18]-[22]. In practice, the analytic method so developed can be applied in whole generality to various problems, in particular for the determination of coupling between antennas above an imperfectly reflective plane, or for the calculus of Green's functions for planar lines printed on a multilayer.

This chapter is organized as follows. In [section 1.2](#), we give a discussion on the representation of the field with potentials, on the boundary conditions and on the positions

of g_j in the complex plane when metamaterials can be present. Next, we give a global expression of potentials attached to the fields radiated by arbitrary bounded sources in free space in [section 1.3](#), and above the multilayer in [section 1.4](#), which we develop and expand for arbitrarily oriented dipoles in [section 1.5](#). In [sections 1.6](#) and [1.7](#), we then detail a compact expression of the special function involved in the potentials attached to each mode, intimately depending on a parameter ε that is necessary to correctly take account of active modes. The definition of ε will be useful for the development of exact ([section 1.6](#)) and asymptotic ([section 1.7](#)) expansions with error functions for arbitrary cases, allowing in particular a general analysis of guided waves in [section 1.8](#), including backward waves, near and far from the sources.

1.2. Potentials, reflection coefficients and multimode boundary conditions

1.2.1. Fields and potentials

We consider the scattering by an imperfectly reflective plane when it is illuminated by the field radiated by a bounded primary source, which is composed of arbitrary electrical and magnetic currents J and M (see [Figure 1.1](#)). In the space of points r with Cartesian coordinates (x, y, z) , this plane is defined by $z = 0$. A harmonic time dependence $e^{i\omega t}$, from now on assumed, is suppressed throughout. The constants ε_0 and μ_0 are, respectively, the permittivity and the permeability of the free space above the plane, and $k_0 = \omega(\mu_0 \varepsilon_0)^{1/2}$ is its wavenumber. Each component of the scattered field is assumed to be regular in the domain $z > 0$, and $O(e^{-\gamma/|r|})$ with $\gamma > 0$ as $|r| \rightarrow \infty$ when $|\arg(ik_0)| < \pi/2$ (note: no loss is a limit case).

The electric field E and the magnetic field H above the multilayer, following Harrington [23, p. 131] (see also Jones [3, p. 19]), can be written with two scalar potentials \mathcal{E} and \mathcal{H} , as follows:

$$E = -ik_0 \text{curl}(\mathcal{H} \hat{z}) + (\text{grad}(\text{div}(\cdot)) + k_0^2)(\mathcal{E} \hat{z}), \quad (1.1)$$

$$Z_0 H = ik_0 \text{curl}(\mathcal{E} \hat{z}) + (\text{grad}(\text{div}(\cdot)) + k_0^2)(\mathcal{H} \hat{z}),$$

where the Helmholtz equations $(\Delta + k_0^2)\mathcal{E} = 0$ and $(\Delta + k_0^2)\mathcal{H} = 0$ are verified outside the sources, $Z_0 = (\mu_0/\varepsilon_0)^{1/2}$. Thereafter, we denote (E_i, H_i) and (E_s, H_s) the potentials corresponding, respectively, to the incident field (incoming wave) (E^i, H^i) and the scattered field (outgoing wave) (E^s, H^s) , and we write (1.1) in the compact form:

$$(E, Z_0 H) = (\mathcal{L}_1(\hat{z}\mathcal{E}, \hat{z}\mathcal{H}), \mathcal{L}_2(\hat{z}\mathcal{E}, \hat{z}\mathcal{H})) = \mathcal{L}(\hat{z}\mathcal{E}, \hat{z}\mathcal{H}), \quad (1.2)$$

$$\mathcal{L}_1(u, v) = ((\text{grad}(\text{div}(\cdot)) + k_0^2)(u) - ik_0 \text{curl}(v)),$$

$$\mathcal{L}_2(u, v) = (ik_0 \text{curl}(u) + (\text{grad}(\text{div}(\cdot)) + k_0^2)(v)).$$

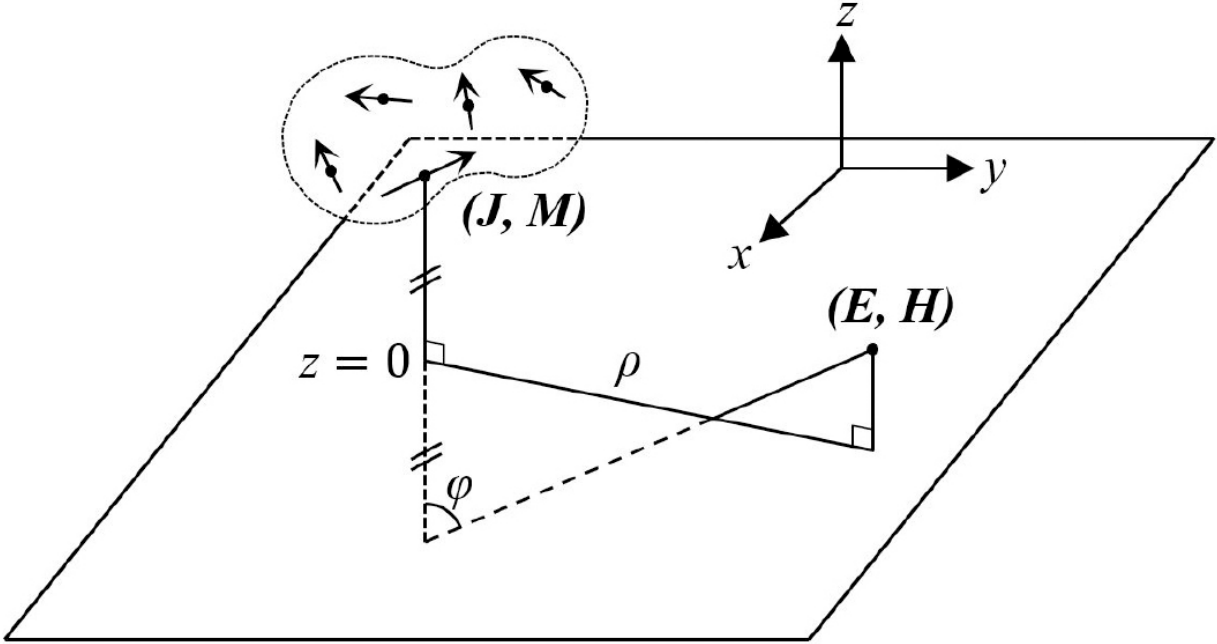


Figure 1.1 Geometry: sources (J, M) and observation point above the plane $z = 0$

1.2.2. Multimode boundary conditions for a multilayer backed by an impedance plane

Let us consider a multilayer plane composed of uniform isotropic (or z -axial anisotropic) layers. Any plane wave (E^i, H^i) , incident at angle β with the normal \hat{z} , is then scattered as a reflected plane wave (E^s, H^s) that satisfies

$E_z^s|_{z=0+} = R_{e,e}E_z^i|_{z=0-}$ (i.e. $H_{\perp}^s|_{z=0+} = R_{e,e}H_{\perp}^i|_{z=0-}$ in TM polarization), and $H_z^s|_{z=0+} = R_{h,h}H_z^i|_{z=0-}$ (i.e.

$E_{\perp}^s|_{z=0+} = R_{h,h}E_{\perp}^i|_{z=0-}$ in TE polarization) [4], [5], [21]

(see details in [appendix A](#)). If the multilayer is backed by a constant impedance plane, the reflection coefficients $R_{e,e}$ and $R_{h,h}$ are meromorphic functions of the variable $\cos \beta$, which we can model as rational functions [2] with simple poles, following:

$$R_{e,e}(\beta) = \prod_{j=1}^{N_e} \frac{\cos \beta - g_j^e}{\cos \beta + g_j^e}, \quad R_{h,h}(\beta) = \prod_{j=1}^{N_h} \frac{\cos \beta - g_j^h}{\cos \beta + g_j^h}, \quad (1.3)$$

for which we have the basic equalities (without superscripts e and h):

$$\prod_{j=1}^N \frac{\cos \beta - g_j}{\cos \beta + g_j} = (\pm 1)^N + \sum_{j=1}^N a_j \frac{\left(\frac{-\cos \beta}{g_j}\right)^{\frac{1 \mp 1}{2}}}{\cos \beta + g_j}, \quad (1.4)$$

$$\frac{a_j}{2g_j} = - \prod_{i \neq j}^N \frac{g_j + g_i}{g_j - g_i}, \quad (-1)^N - 1 = \sum_{j=1}^N \frac{a_j}{g_j},$$

where $N \geq 1$, and $\prod_{i \neq j}^1 \frac{g_j + g_i}{g_j - g_i} \equiv 1$ for $N = 1$. The constants $(\pm 1)^N$ refer to limit values when $|\cos \beta|^{\pm 1} \rightarrow \infty$.

The $g_j^{e,(h)}$ are constants attached to complex modes with $\text{Im}(g_j^{e,(h)}) \neq 0$, passive when $\text{Re}(g_j^{e,(h)}) \geq 0$ or active when $\text{Re}(g_j^{e,(h)}) < 0$, and ordered such that $|g_{j+1}^{e,(h)}| \geq |g_j^{e,(h)}|$, while, as considered in [26]-[28], we assume that:

(1.5)

when (1.3) applies, N_e and N_h and thus N are positive odd numbers, (note: this restriction on $N_{e,(h)}$ will be removed in the more general case of extended boundary conditions). Considering plane waves representation of fields (see [appendix A](#)), we can then write a multimode boundary conditions at $z = 0^+$ [2]:

$$\prod_{j=1}^{N_e} \left(\frac{\partial}{\partial z} - ik_0 g_j^e \right) E_z^s(z)|_{0+} = \prod_{j=1}^{N_e} \left(\frac{\partial}{\partial z} + ik_0 g_j^e \right) E_z^i(-z)|_{0+}, \quad (1.6)$$

$$\prod_{j=1}^{N_h} \left(\frac{\partial}{\partial z} - ik_0 g_j^h \right) H_z^s(z)|_{0+} = \prod_{j=1}^{N_h} \left(\frac{\partial}{\partial z} + ik_0 g_j^h \right) H_z^i(-z)|_{0+}.$$

From the symmetry at normal incidence, the condition $R_{h,h}(0) = -R_{e,e}(0)$ must apply, which leads us to write:

$$\prod_{j=1}^{N_h} \frac{\pm 1 - g_j^h}{\pm 1 + g_j^h} = - \prod_{j=1}^{N_e} \frac{\pm 1 - g_j^e}{\pm 1 + g_j^e}, \quad (1.7)$$

and implies that $R_{h,h}(\pi) = -R_{e,e}(\pi)$. The condition (1.7) has crucial importance to avoid non-physical behaviors of fields derived from potentials, as examined further in this paper. Besides, the reader will notice that (1.7) implies $g_1^e = 1/g_1^h$ when $N_{e(h)} = 1$, as well known for monomode (impedance) boundaries conditions [1]. The numbers $N_{e(h)}$ correspond to truncated infinite products, where the less significant $g^{e(h)}$ have been neglected, while some $g^{e(h)}$ have to be modified so that $R_{h,h}(0) = -R_{e,e}(0)$ remains.

Considering (1.1), we can use:

$$E_z = \frac{\partial^2 \mathcal{E}}{\partial z^2} + k_0^2 \mathcal{E}, \quad Z_0 H_z = \frac{\partial^2 \mathcal{H}}{\partial z^2} + k_0^2 \mathcal{H}, \quad (1.8)$$

in (1.6), and we are led to search scattered potentials E_s and H_s , satisfying the Helmholtz equation as $z > 0$, regular and exponentially vanishing as $z \rightarrow 0\infty$ when $|\arg(ik_0)| < \pi/2$, that verify as $z > 0$:

$$\prod_{i=1}^{N_e} \left(\frac{\partial}{\partial z} - ik_0 g_j^e \right) \mathcal{E}_s(z) = \prod_{j=1}^{N_e} \left(\frac{\partial}{\partial z} + ik_0 g_j^e \right) \mathcal{E}_i(-z), \quad (1.9)$$

$$\prod_{j=1}^{N_h} \left(\frac{\partial}{\partial z} - ik_0 g_j^h \right) \mathcal{H}_s(z) = \prod_{j=1}^{N_h} \left(\frac{\partial}{\partial z} + ik_0 g_j^h \right) \mathcal{H}_i(-z),$$

where \mathcal{E}_i and \mathcal{H}_i potentials are attached to radiation of arbitrary primary sources.

1.2.3. Extended multimode boundary conditions

More generally, we can consider an extended form when we want to include the case of a multilayer slab in free space, which is composed of isotropic [4]-[5] (or z-axial anisotropic [21]) layers. The reflection coefficients $R_{e,e}$ and $R_{h,h}$ remain meromorphic functions of $\cos \beta$, but we now model them in a more general form, following:

$$R_{e,e}(\beta) = R_0^e \frac{\prod_{j=1}^{N'_e} (\cos \beta - g_j^{e'})}{\prod_{j=1}^{N_e} (\cos \beta + g_j^e)}, \quad R_{h,h}(\beta) = R_0^h \frac{\prod_{j=1}^{N'_h} (\cos \beta - g_j^{h'})}{\prod_{j=1}^{N_h} (\cos \beta + g_j^h)}, \quad (1.10)$$

with simple complex poles $-g_j^{e(h)}$, $N'_{e(h)} \leq N_{e(h)}$, constants R_0^e and R_0^h (this time for odd or even $N_{e(h)}$), for which we notice the basic equalities (without supercripts e and h):

$$R_0 \frac{\prod_{j=1}^{N'} (\cos \beta - g'_j)}{\prod_{j=1}^N (\cos \beta + g_j)} - a_{0\tau} = \sum_{j=1}^N a_j \frac{\left(\frac{-\cos \beta}{g_j}\right)^{\frac{1-\tau}{2}}}{\cos \beta + g_j} = \sum_{j=1}^N \frac{\tau \frac{a_j}{g_j}}{\left(\frac{\cos \beta}{g_j}\right)^\tau + 1}, \quad (1.11)$$

$$a_{j \neq 0} = R_0 \frac{\prod_{i=1}^{N'} (-g'_i - g_j)}{\prod_{i \neq j}^N (g_i - g_j)}, \quad \begin{cases} a_{0+} = R_0 & \text{if } N' = N \\ a_{0+} = 0 & \text{if } N' < N \end{cases}, \quad a_{0-} = R_0 \left(\prod_{i=1}^{N'} -g'_i \right) / \left(\prod_{i=1}^N g_i \right),$$

where the constants $a_{0\tau}$ refer to limit values when

$|\cos \beta|^\tau \rightarrow \infty$ with $\tau = +1$ or -1 . We have

$N \geq N'$, $N \geq 1$, $N' \geq 0$, and we can let $\prod_{i \neq j}^1 (g_i - g_j) \equiv 1$ and $\prod_{j=1}^0 (\cos \beta - g'_j) \equiv 1$ for $N' = 0$.

As in the previous section, we consider that $R_{h,h}(0) = -R_{e,e}(0)$, and assume additionally that $R_{h,h}(\pi) = -R_{e,e}(\pi)$. This implies, after using (1.11) when $\cos \beta = \pm 1$:

$$\sum_{j=1}^{N_e} \frac{\tau_e \frac{a_j^e}{g_j^e} (g_j^e)^{\tau_e}}{(g_j^e)^{\tau_e} \pm 1} + \sum_{j=1}^{N_h} \frac{\tau_h \frac{a_j^h}{g_j^h} (g_j^h)^{\tau_h}}{(g_j^h)^{\tau_h} \pm 1} = -(a_{0\tau_e} + a_{0\tau_h}), \quad (1.12)$$

with $\tau_{e(h)} = +1$ or -1 . The condition (1.12), as previously noticed for (1.7), has a crucial importance to avoid non-physical behaviors of fields derived from potentials.

Considering (1.10) and plane waves representation of fields (see [appendix A](#)), we can write:

JARRY Pierre, BENEAT Jacques N.

RF and Microwave Electromagnetism

LAHEURTE Jean-Marc

UHF RFID Technologies for Identification and Traceability

SAVAUX Vincent, LOUËT Yves

MMSE-based Algorithm for Joint Signal Detection, Channel and Noise Variance Estimation for OFDM Systems

THOMAS Jean-Hugh, YAAKOUBI Nourdin

New Sensors and Processing Chain

TING Michael

Molecular Imaging in Nano MRI

VALIÈRE Jean-Christophe

Acoustic Particle Velocity Measurements using Laser: Principles, Signal Processing and Applications

VANBÉSIEN Olivier, CENTENO Emmanuel

Dispersion Engineering for Integrated Nanophotonics

2013

BENMAMMAR Badr, AMRAOUI Asma

Radio Resource Allocation and Dynamic Spectrum Access

BOURLIER Christophe, PINEL Nicolas, KUBICKÉ Gildas

Method of Moments for 2D Scattering Problems: Basic Concepts and Applications

GOURE Jean-Pierre

Optics in Instruments: Applications in Biology and Medicine

LAZAROV Andon, KOSTADINOV Todor Pavlov

Bistatic SAR/GISAR/FISAR Theory Algorithms and Program Implementation

LHEURETTE Eric

Metamaterials and Wave Control

PINEL Nicolas, BOURLIER Christophe

Electromagnetic Wave Scattering from Random Rough Surfaces: Asymptotic Models

SHINOHARA Naoki

Wireless Power Transfer via Radiowaves

TERRE Michel, PISCHELLA Mylène, VIVIER Emmanuelle

Wireless Telecommunication Systems

2012

LALAUZE René

Chemical Sensors and Biosensors

LE MENN Marc

Instrumentation and Metrology in Oceanography

LI Jun-chang, PICART Pascal

Digital Holography

2011

BECHERRAWY Tamer

Mechanical and Electromagnetic Vibrations and Waves

BESNIER Philippe, DÉMOULIN Bernard

Electromagnetic Reverberation Chambers

GOURE Jean-Pierre

Optics in Instruments

GROUS Ammar

Applied Metrology for Manufacturing Engineering

LE CHEVALIER François, LESSELIER Dominique, STARAJ Robert

Non-standard Antennas

2010

BEGAUD Xavier

Ultra Wide Band Antennas

MARAGE Jean-Paul, MORI Yvon

Sonar and Underwater Acoustics

2009

BOUDRIOUA Azzedine

Photonic Waveguides

BRUNEAU Michel, POTEL Catherine

Materials and Acoustics Handbook

DE FORNEL Frédérique, FAVENNEC Pierre-Noël

Measurements using Optic and RF Waves

FRENCH COLLEGE OF METROLOGY

Transverse Disciplines in Metrology

2008

FILIPPI Paul J.T.

Vibrations and Acoustic Radiation of Thin Structures

LALAUZE René

Physical Chemistry of Solid-Gas Interfaces

2007

KUNDU Tribikram

Advanced Ultrasonic Methods for Material and Structure Inspection

PLACKO Dominique

Fundamentals of Instrumentation and Measurement

RIPKA Pavel, TIPEK Alois

Modern Sensors Handbook

2006

BALAGEAS Daniel *et al.*

Structural Health Monitoring

BOUCHET Olivier *et al.*

Free-Space Optics

BRUNEAU Michel, SCELO Thomas

Fundamentals of Acoustics

FRENCH COLLEGE OF METROLOGY

Metrology in Industry

GUILLAUME Philippe

Music and Acoustics

GUYADER Jean-Louis

Vibration in Continuous Media