Anthony, Chi-Ying Wong

Powder Technology in Plastics Processing





Wong
Powder Technology in Plastics Processing

Anthony, Chi-Ying Wong

Powder Technology in Plastics Processing

HANSER Hanser Publishers, Munich The Author: Anthony, Chi-Ying Wong, Hong Kong SAR



Distributed by: Carl Hanser Verlag Postfach 86 04 20, 81631 Munich, Germany Fax: +49 (89) 98 48 09 www.hanserpublications.com www.hanser-fachbuch.de

The use of general descriptive names, trademarks, etc., in this publication, even if the former are not especially identified, is not to be taken as a sign that such names, as understood by the Trade Marks and Merchandise Marks Act, may accordingly be used freely by anyone. While the advice and information in this book are believed to be true and accurate at the date of going to press, neither the authors nor the editors nor the publisher can accept any legal responsibility for any errors or omissions that may be made. The publisher makes no warranty, express or implied, with respect to the material contained herein.

The final determination of the suitability of any information for the use contemplated for a given application remains the sole responsibility of the user.

All rights reserved. No part of this book may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying or by any information storage and retrieval system, without permission in writing from the publisher.

© Carl Hanser Verlag, Munich 2021 Editor: Mark Smith Production Management: Cornelia Speckmaier Coverconcept: Marc Müller-Bremer, www.rebranding.de, Munich Coverdesign: Max Kostopoulos Cover image: © shutterstock.com/Forance Typesetting: Eberl & Kœsel Studio GmbH, Altusried-Krugzell, Germany Printed and bound by CPI books GmbH, Leck Printed in Germany

ISBN: 978-1-56990-869-3 E-Book ISBN: 978-1-56990-870-9

Preface

This book has arisen out of an experience I had in handling a complaint from a blown-film fabricator who had been purchasing a white masterbatch from a local color masterbatch manufacturer. On one occasion, the fabricator reported to the supplier that the last batch of the masterbatch he received did not have the expected performance and quality. The throughput of his blown film line and the overall physical properties of the linear low-density polyethylene film made were noticeably different, with all the operation settings and let down ratio remaining unchanged. After a series of thorough investigations, it was found that the problem was caused by the wider size distribution of the titanium dioxide present in the last batch of the white masterbatch when compared with those in previous batches. This is a typical example of the underappreciation of the importance of particulate solids handling in obtaining good product quality and process optimization, although it is the most elementary processing step in the plastics manufacturing industry. Therefore, this book aims to provide readers with a broad understanding of powder technology and the significance of particulate solid characteristics that are applicable to plastics manufacturing processes. The purpose of this book is to provide useful and practical information offering alternative approaches for engineers to answer questions commonly found in the industry. Hopefully, the discussions of the selected examples of research investigations may encourage readers to formulate further fundamental as well as applicational research studies on the inter- and intra-relationship between powder technology and plastics processing technology.

Not only does book writing require the author's determination and interest, but also the support and encouragement from people around them, including family members. I am no exception and would therefore very much like to thank my wife, Sue, and my sons, Darren and Jens, for their patience and understanding during the time I spent writing this book. I am in great debt to Ms. Octavia Wong for her superb endurance to read through this entire monograph, making important corrections and suggestions on my English especially during the busy and difficult time she has had with her own research studies. I am also grateful for Dr. Keith Hotten's constructive comments on my English, which have been very useful. Sincere appreciation is extended to Professor Augustine Wong for spending the time to ensure the correctness of the mathematics involved in this book. Acknowledgement must be given to Mr. Peram Prasada Rao of TechnoBiz Communications Co. Ltd., Thailand, for his continuous kind encouragement, which has motivated me to complete this writing task. I would also like to express my utmost appreciation to the late Professor Derek Geldart and Professor Norman Harnby for their excellent supervision during the years of my research study at the University of Bradford, U.K. Their enthusiasm, attitudes, and logical approaches on research investigations, from start to end, have set a valuable template for me to follow. Last but not least, words cannot express the amount of appreciation I have for my parents, brothers, and sisters for their excellent support and encouragement given to me over all these years.

The Author



After having graduated from the University of Bradford, UK, with a B.Tech. (Hons.) degree in Chemical Engineering and a Ph.D. degree in Gas Fluidization of Cohesive Powders, Dr. Wong spent a few years of his early career with BASF and Exxon Chemical as a technical and marketing support in their plastics divisions. He later became an academic member in the Department of Industrial and Manufacturing Systems Engineering at The University of Hong Kong, After he left The University of Hong Kong, he joined a listed color masterbatch compounding

company in Hong Kong as its vice-chairman, largely responsible for the company's market development, seeking global commercial opportunities, and carrying out research and development projects. He is currently the Market Coordinator – Asia Pacific of Badger Color Concentrates Inc., USA.

Besides his vast commercial experience in the global plastics industry, Dr. Wong has been actively carrying out research studies, with focuses on plastics processing technology (extrusion, in particular), rheological characteristics of polymers, biodegradable polymers, environmental engineering, and powder technology.

Contents

Pr	eface	9	V						
Th	e Au	thor	VII						
1	Introduction								
2	Polymers, Additives, and Processing								
	2.1	Overview	5						
	2.2	Polymers	8						
	2.3	Additives	11						
	2.4	Processing Technology	13						
3	Fundamental Parameters of Powder Characteristics								
	3.1	Introduction	23						
	3.2	Particle Size and Size Distribution	25						
	3.3	Equivalent Particle Size Diameter	36						
	3.4	Methods of Particle Size Measurement	39						
	3.5	Particle Shape	41						
	3.6	Particle Density and Bulk Density	42						
	3.7	Sampling	45						
4	Solid-Solid Mixing								
	4.1	Overview	47						
	4.2	The Statistical Assessment of Degrees of Mixing	48						
	4.3	Segregation and Effect of Particle Flowability	51						
	4.4	Mixing Mechanism and Selection of Mixers	56						

5	Sto	rage and Discharge of Particulate Solids	61						
	5.1	Introduction	61						
	5.2	Mode of Hopper Flow	62						
	5.3	Hopper Design	65						
		5.3.1 Design Principles and Procedures							
		(Based on Jenike Shear Cell Testing Technique)	65						
	5.4	General Discussion	74						
6	Pne	umatic Conveying of Particulate Solids	75						
	6.1	Introduction	75						
	6.2	Basic System Setup	79						
	6.3	Basic Phase Diagram	82						
	6.4	Dilute Phase Conveying	84						
	6.5	Dense Phase Conveying	87						
	6.6	Other Considerations	88						
7	Gas	s Fluidization							
	7.1	Introduction	91						
	7.2	Qualitative Classification of Gas Fluidization	94						
	7.3	Basic Measurements from a Fluidized Bed	96						
		7.3.1 Bed Pressure Drop	96						
		7.3.2 Minimum Fluidization Velocity, $U_{\rm mf}$	100						
		7.3.3 Minimum Bubbling Velocity, $U_{\rm mb}$	102						
		7.3.4 Bed Expansion	103						
	7.4	Criteria for Group Demarcation	107						
	7.5	Gas Distributor	110						
	7.6	Applications of Gas Fluidization Technology							
		in Plastics Processing	111						
8	Inte	erparticle Forces	121						
	8.1	Introduction							
	8.2	Types of Interparticle Forces	121						
		8.2.1 van der Waals' Forces	121						
		8.2.2 Electrostatic Forces	122						

		8.2.3	Moistu	re Bon	ding	••••						•••		•••		12	2
		8.2.4	Other l	nterpa	article	Bon	ds/F	orce	s				• • • •	•••		12	2
	8.3	8.3 "Alternative" Way of Measuring Interparticle Forces										• • • •	12	3			
9			Partic eric Me							-						12	7
Ар	pend	lix A (Chapte	r 3) .		••••			•••					•••		13	3
Ар	pend	lix B (Chapte	r 4) .		••••					•••	•••				13	7
Ap	pend	lix C (Chapte	r 5) .		••••										13	9
Ар	pend	lix D (Chapte	er 5)		••••						• • •				14	1
Ар	pend	lix E (O	Chapte	r 6)		••••			••••			•••				14	5
Ind	lex .					••••										15	1

Introduction

All polymer processes share one straightforward objective—to convert raw materials to finished products. However, this branch of technology is not as simple as it seems.

Tadmor and Gogos [1] pointed out that polymer processing is a multi-discipline. It involves different science and engineering principles. A successful conversion from raw materials to finished products will depend on our understanding of these principles. They suggested a comprehensive conceptual structural breakdown of this technology (Figure 1.1) to illustrate the inter- and intra-relationship of all the major subjects involved in this discipline.

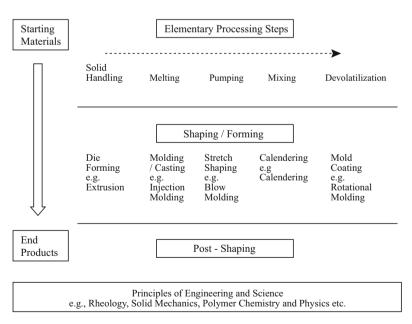


Figure 1.1 Conceptual structural breakdown of polymer processing suggested by Tadmor and Gogos [1]

It can be seen from Figure 1.1 that the conversion process was sequentially categorized into processes of:

elementary processing steps shaping/forming methods post-shaping

Common components within the category of elementary steps are *handling of particulate solids, melting, pressurization and pumping, mixing,* and *devolatilization and stripping,* regardless of the subsequent chosen shaping methods. Placing *handling of particulate solids* as the first required task in the elementary steps is well-justified, since almost all polymer processes start with raw materials in solid forms.

The comprehensiveness of the structural breakdown concept suggested by Tadmor and Gogos [1] is evident when tracking the "experience" that the solid raw materials have as soon as they are discharged into the hopper. Take blown film extrusion as an example. The homogenized solid raw materials will drop into the metal barrel as soon as they pass through the hopper throat. The solid materials will then be pushed (in the form of a solid plug) to the downstream by the combined effect of the rotation of the screw and the designed friction characteristics of the inner metal surfaces of the extruder. As the materials move forward, they will be compacted due to the decreasing clearance of the screw channels, causing the pressure to build up. This is a purposeful design to ensure that the compacted materials will be ready to melt at the compression/melting zone of the screw.

Melting of polymers is a slow process because polymers have low thermal conductivity and low thermal degradation. Thus, it is often a rate-determining processing step. Once molten polymer has accumulated inside the barrel, it will be continuously "pumped" by the rotating screw to travel further down. This transportation mechanism is different from the one that governs the transportation of the solid materials in the feeding zone of the screw. High pressure is generated instantaneously, which is needed for enhancing homogenization and effective subsequent shaping.

The processes of melting and pressurization may not necessarily be two distinct steps. There can be interactions between them. Therefore, as pointed out by Tadmor and Gogos [1], the two steps may occur simultaneously.

After pumping and pressurization, the next step is mixing. This is an important processing step because this is the last step in preparing the material for shaping. If the required mixing quality is not achieved at this mixing region, the quality of the finished products will inevitably be affected. It is worth mentioning that the purpose of this mixing step is not simply to obtain a physically well-homogenized mixture. It also serves the purpose of getting a mixture to have homogenized thermodynamic properties such as temperature.

If a polymeric system contains low molecular weight substances or substances of volatile properties, they must be expelled from the system prior to shaping once they have performed their expected functions. This practice forms the last component (i.e., *devolatilization and stripping*) in the suggested elementary steps.

Tadmor and Gogos [1] classified the different shaping methods adopted in the industry into *calendering and coating, die forming, mold coating, molding and casting,* and *stretch shaping*. These classifications were made based on the common required hardware and operation practice among the shaping methods. For example, the shaping devices in sheet extrusion, profile extrusion, pipe extrusion, etc., are all die-related. Therefore, they are grouped under the same classification of *die forming*.

Post-shaping essentially involves simple processes such as trimming, printing, punching, etc., which, in many cases, are relatively simpler and less complicated than the processes described above.

Figure 1.1 shows that elementary steps, shaping methods, and post-shaping processes are all firmly rooted in a number of science and engineering subjects. The principles of these subjects govern the conversion of raw materials to finished products. During the course of any conversion process, raw materials go through a series of phase changes, changing from solid to molten and back to solid again. These phase changes require a tremendous amount of work to be done on the system. For example, in the case of a single screw extruder running at a steady state, one rotation of the screw will need to perform all the elementary steps instantaneously. The efficiency of the screw in performing these designed functions greatly depends on our understanding of the principles of transport phenomena, rheological behavior, mixing characteristics, etc., and how these principles could be effectively applied in the hardware and process design considerations.

In the aviation industry, it is often said that a successful and smooth landing of a plane closely depends on how well the landing process is prepared beforehand. Similarly, a successful polymer manufacturing process is closely related to our understanding of the fundamental characteristics of the starting solid raw materials. The subsequent chapters of this book will systematically discuss these characteristics.

References

[1] Tadmor, Z. and Gogos, C.G., Principles of Polymer Processing, 2nd Ed. (2006), Wiley, New Jersey