

Sahol Hamid Abu Bakar · Wardah Tahir
Marfiah Ab. Wahid
Siti Rashidah Mohd Nasir
Rohana Hassan *Editors*

ISFRAM 2014

Proceedings of the International
Symposium on Flood Research and
Management

ISFRAM 2014

Sahol Hamid Abu Bakar • Wardah Tahir •
Marfiah Ab. Wahid • Siti Rashidah Mohd Nasir •
Rohana Hassan
Editors

ISFRAM 2014

Proceedings of the International Symposium
on Flood Research and Management

Editors

Sahol Hamid Abu Bakar
Universiti Teknologi MARA
Selangor, Malaysia

Wardah Tahir
Universiti Teknologi MARA
Selangor, Malaysia

Marfiah Ab. Wahid
Universiti Teknologi MARA
Selangor, Malaysia

Siti Rashidah Mohd Nasir
Universiti Teknologi MARA
Selangor, Malaysia

Rohana Hassan
Universiti Teknologi MARA
Selangor, Malaysia

ISBN 978-981-287-364-4

ISBN 978-981-287-365-1 (eBook)

DOI 10.1007/978-981-287-365-1

Library of Congress Control Number: 2015937600

Springer Singapore Heidelberg New York Dordrecht London

© Springer Science+Business Media Singapore 2015

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, express or implied, with respect to the material contained herein or for any errors or omissions that may have been made.

Printed on acid-free paper

Springer Science+Business Media Singapore Pte Ltd. is part of Springer Science+Business Media (www.springer.com)

Preface

The world is frequently being devastated by unpredictable disasters. Years of civilization of a nation can simply be shattered by a disaster such as tsunami in a matter of hours. Flooding has been one of the most disastrous natural hazards striking many parts of the world. The increasing trend in flood disasters has resulted from the combined impacts of several factors including global warming effects (e.g., increasing frequency of intense rain, glacier melting, and sea-level rise), land-use changes, and growing population in flood-prone areas.

International Symposium on Flood Research and Management 2014 (ISFRAM2014) is organized by the Flood Control Research Center (FCRC), Faculty of Civil Engineering, Universiti Teknologi MARA, to promote advances in flood research and management in finding solution toward reducing flood disasters. The objective of ISFRAM2014 is to provide a forum to researchers, scientists, and engineers to share and exchange their views, experiences, and researches in flood-related areas and sustainable management in Malaysia and worldwide. The symposium presents innovative work and best practices in managing flood and recommendation of flood solutions.

The full paper submissions were reviewed by national and international panel of reviewers before final acceptance. The selected papers were evaluated based on originality, research content, and relevance to contributions. Papers selected cover the fundamentals and latest advancements in related areas to flood research and management. The book proceedings to be published by Springer will serve as the source of knowledge and state-of-the art technology in managing flood for the betterment of the quality of life.

This symposium is supported by IEEE Malaysia IE/IA Joint Chapter and FCRC collaborators—Colorado State University, IIT Roorkee, AIT Thailand, Stuttgart University, National Hydraulic Research Institute, and the Drainage and Irrigation Department. I would like to express my deepest gratitude to all committee

members, panel of reviewers, authors, chairpersons, delegates, and everyone who had contributed to make ISFRAM2014 a success. I wish all participants a beneficial symposium, valuable experiences, and a pleasant stay at Sabah.

Selangor, Malaysia

Wardah Tahir

About FCRC

Flood Control Research Center was founded by the Vice Chancellor of Universiti Teknologi Mara, Tan Sri Dato' Sri Prof. Ir. Dr. Sahol Hamid Abu Bakar, in collaboration with Stuttgart University, Colorado State University, Asian Institute of Technology (AIT), and Indian Institute of Technology (IIT) Roorkee as a five-university collaboration. The objectives of the center are:

- To identify important issues on flood
- To provide the solutions for flood problems in Malaysia
- To train young researchers and staff
- To share the pool of expertise
- To go beyond Malaysian border
- To get national and international research grants

The national research collaborators include the National Hydraulic Research Institute Malaysia (NAHRIM), Drainage and Irrigation Department (DID), Lembaga Urus Air Selangor (LUAS), Malaysian Meteorological Department (MMD), Department of Environment (DOE), National Security Council, and Local City Councils. These agencies would contribute:

- To share resources, data, and expertise
- To act as the pushing factor to the government for implementation of the proposed flood solution
- Joint research and supervision
- Joint publication
- Co-organizers of events and activities

Current and future activities of FCRC include:

Establishing a Flood Library which has:

- Library of models (e.g., HEC-RAS, HEC-HMS, Infoworks, Mike-11)
- Collection of structural solutions and key methodologies for flood problem

- Repositories of technical papers
- Open access to libraries especially to the five universities

Defining flood master planning methodology

- Flood risk and damage assessment
- Flood plan to incorporate entire flood hydrological regime
- Economic cutoff point for extending flood plan by using nonstructural method
- Nonstructural flood planning

Providing training program

- To increase capacity building for those involved in flood control and management
- To enable access to experts in the consortium of the five-university collaboration

Organizing annual meeting and symposium

ISFRAM2014 Organizing Committee

Patron

Y. Bhg. Tan Sri Dato' Sri Prof. Ir. Dr. Sahol Hamid Abu Bakar FASc

UiTM Advisors

Prof. Dr. Azmi Ibrahim

Mustafar Kamal Hamzah, IEEE Malaysia IE/IA Joint Chapter

International Advisors

Dr. Daniel Gunaratnam (USA)

Prof. Dr. Pierre Y. Julien (Colorado State University)

Prof. Dr. Silke Wieprecht (Stuttgart University, Germany)

Prof. Dr. M. Perumal (Indian Institute of Technology (IIT) Roorkee, India)

Prof. Dr. Mukand Singh Babel (AIT Asian Institute of Technology, Thailand)

Industry Advisor

Ir. Dr. Nasehir Khan (National Hydraulic Research Institute Malaysia)

General Chair

Assoc. Prof. Dr. Wardah Tahir

General Co-chair

Dr. Siti Rashidah Mohd Nasir

Technical Program Chair

Dr. Marfiah Ab Wahid

Dr. Mohd Fozi Ali

Dr. Janmaizatulriah Jani

Dr. Lee Wei Koon

Ir. Turahim Abd Hamid

Assoc. Prof. Dr. Ramlah Tajuddin

Publication Chair

Dr. Rohana Hassan

Finance Chair

Ros Mini Ismail

Secretariat

Azinoor Azida Abu Bakar

Suzana Ramli

Dr. Jazuri Abdullah

Sh Nurul Huda Sy Yahya

Mohd Shahir Abd Rahman

Information and Website Chair

Khasiah Zakaria

Ahmad Amiri Mohamad

Bahroni Moojee

Reviewers

Dr. Mokhtar Guizani	SET King Saud University, Saudi Arabia	g_mokh@yahoo.fr
Dr. Milad Jajarmizadeh	UTM	milad_jajarmi@yahoo.com
Assoc. Prof. Dr. Marlinda Abdul Malik	UNITEN	marlinda@uniten.edu.my
Assoc. Prof. Dr. Wardah Tahir	UiTM	wardah_tahir@yahoo.com
Mrs. Azlinda Saadon	UNISEL	azlinda303@gmail.com
Prof. Dr. Abdul Halim Ghazali	UPM	abdhalim@eng.upm.edu.my
Mr. Fauzi Baharudin	UiTM	fauzi1956@yahoo.com
Prof. Dr. Faridah Othman	UM	faridahothman@um.edu.my
Mrs. Azinoor Azida Abu Bakar	UiTM	azinoor@salam.uitm.edu.my
Prof. Dr. Ahmad Khairi Abd Wahab	UTM	drakaw@gmail.com
Dr. Marfiah Ab Wahid	UiTM	ce_marfiah@yahoo.com
Dr. Mohd Fozi Ali	UiTM	mohdfozi@salam.uitm.edu.my
Mrs. Suzana Ramli	UiTM	suzana799@salam.uitm.edu.my
Prof. Dr. Ahmad Yahya	USM	ceshukri@usm.my
Assoc. Prof. Dr. Ramlah Tajuddin	UiTM	reviewramlah2014@gmail.com
Dr. May Raksmeiy	UiTM	may_raksmeiy@salam.uitm.edu.my
Dr. Lee Wei Koon	UiTM	leewei994@salam.uitm.edu.my
Mrs. Nuryazmeen Farhan Haron	UiTM	neemzay@yahoo.com
Prof. Dr. Muthiah Perumal	IIT Roorkee, India	p_erumal@yahoo.com
Dr. Sucharit Koontanakulvong	Chulalongkorn University, Thailand	sucharit.K@chula.ac.th
Mrs. Caroline Peter Diman	UiTM	carolinepeter968@ppinang.uitm.edu.my
Dr. Jazuri Abdullah	UiTM	jazuri.abdullah@yahoo.com

(continued)

Dr. Chia Chay Tay	UiTM	taychiay@perlis.uitm.edu.my
Prof. Krzysztof S. Kulpa	Warsaw University of Technology, Poland	K.Kulpa@elka.pw.edu.pl
Prof. Dr. Md Azlin Md Said	USM	azlin@eng.usm.my
Assoc. Prof. Dr. Sayang Mohd Deni	UiTM	sayang@tmsk.uitm.edu.my
Sharifah Nurul Huda Syed Yahya	UiTM	sharifahnurulhuda@hotmail.com

Keynote Speaker

Pierre Y. Julien

Dr. Julien is professor of Civil and Environmental Engineering at Colorado State University. As Professional Engineer, he has completed projects for 50 different agencies including UNESCO and the World Bank. Dr. Julien authored more than 500 scientific contributions including two textbooks, 20 lecture manuals and book chapters, 170 refereed journal articles including 90 full papers in scientific journals, 150 professional presentations, 190 conference papers, and 120 technical reports. He supported and guided more than 100 graduate students (including 37 Ph.D.) to complete engineering degrees. He delivered 15 keynote addresses at international conferences. He received the H.A. Einstein Award for his research on sedimentation and river mechanics.

Contents

Keynote: Analysis of Extreme Floods in Malaysia	1
Pierre Y. Julien, Jazuri Abdullah, and Nur Shazwani Muhammad	
Part I Flood Management	
Trend Analysis of Publications on Watershed Sustainability Indicators in Popular Academic Databases	19
Siti Mariam Akilah Mohd Yusoff and Noorul Hassan Zardari	
Flood Management to Reduce Flood Hazards of Gumti River Using Mathematical Modelling	31
A.F.M. Afzal Hossain	
Community Awareness and Preparedness Towards Flood in Kuantan, Pahang	41
J. Jani, S.R. Mohd Nasir, and N.S. Md Zawawi	
Perspective of Stakeholders on Flash Flood in Kuala Lumpur	51
Siti Rashidah Mohd Nasir and Sya'ari Othman	
Part II Flood Modelling	
GIS Application in Surface Runoff Estimation for Upper Klang River Basin, Malaysia	67
R. Suzana, T. Wardah, and A.B. Sahol Hamid	
The Development and Application of Malaysian Soil Taxonomy in SWAT Watershed Model	77
K. Khalid, M.F. Ali, and N.F. Abd Rahman	

Contribution of Climate Forecast System Meteorological Data for Flow Prediction	89
Milad Jajarmizadeh, Sobri Harun, Kuok King Kuok, and Norman Shah Sabari	
Hydrological Modeling in Malaysia	99
Jazuri Abdullah, Nur Shazwani Muhammad, and Pierre Y. Julien	
Multiday Rainfall Simulations for Malaysian Monsoons	111
Nur S. Muhammad and Pierre Y. Julien	
Part III Modeling and Socioeconomic Impact	
Estimating Floods from an Ungauged River Basin Using GIUH-Based Nash Model	123
Bhabagrahi Sahoo and P.G. Saritha	
A GIS and Excel-Based Program to Calculate Flow Accumulation from the Data of Land Use	135
Jurina Jaafar, Aminuddin Baki Isa, Wardah Tahir, and Fauzilah Ismail	
Flood Damage Assessment: A Review of Flood Stage–Damage Function Curve	147
Noor Suraya Romali, Muhammad @ S.A. Khushren Sulaiman, Zulkifli Yusop, and Zulhilmi Ismail	
Is Farmer’s Agricultural Income Dependent on Type of Irrigation Delivery System?	161
Noorul Hassan Zardari, Sharif Shirazi, Irena Naubi, and Siti Mariam Akilah Mohd Yusoff	
Variable Parameter Muskingum Discharge Routing Method for Overland Flow Modeling	171
Ravindra V. Kale and Muthiah Perumal	
Part IV Water Quality	
Detection of Pathogenic Bacteria in Flood Water	185
Zummy Dahria Mohamed Basri, Zulhafizal Othman, and Marfiah Ab. Wahid	
Stormwater Treatment Using Porous Rock Matrices	195
Marfiah Ab. Wahid, Ismacahyadi Bagus Mohd Jais, Ana Miraa Mohd Yusof, and Nurul Amalina Ishak	
Removal of Oil from Floodwater Using Banana Pith as Adsorbent	211
Ramlah Mohd Tajuddin and Noor Sa’adah Abdul Hamid	
Salinity Velocity Pattern in Estuary Using PIV	221
Nuryazmeen Farhan Haron, Wardah Tahir, Irma Noorazurah Mohamad, Lee Wei Koon, Jazuri Abdullah, and Natasya Anom Sheikh Aladin	

Part V Weather and Climate

Tsunami Forecasting Due to Seismic Activity in Manila Trench of Malaysia Offshore Oil Blocks	247
N.H. Mardi, M.S. Liew, M.A. Malek, and M.N. Abdullah	
Sustainable Trend Analysis of Annual Divisional Rainfall in Bangladesh	257
Muhammad Hassan Bin Afzal and Moniruzzaman Bhuiyan	
Flood Frequency Analysis Due to Climate Change Condition at the Upper Klang River Basin	271
Raksmey May, Zurina Zainol, and Muhamad Fuad Bin Shukor	
Use of Numerical Weather Prediction Model and Visible Weather Satellite Images for Flood Forecasting at Kelantan River Basin	283
Intan Shafeenar Ahmad Mohtar, Wardah Tahir, Sahol Hamid Abu Bakar, and Ahmad Zikry Mohd Zuhari	
Radar Rainfall for Quantitative Precipitation Estimates at Johor River Watershed	295
Sharifah Nurul Huda Syed Yahya, Wardah Tahir, Suzana Ramli, Asnor Muizan Ishak, and Haji Ghazali Omar	
Enhanced Flood Forecasting Based on Land-Use Change Model and Radar-Based Quantitative Precipitation Estimation	305
Salwa Ramly, Wardah Tahir, and Sharifah Nurul Huda Syed Yahya	

Keynote: Analysis of Extreme Floods in Malaysia

Pierre Y. Julien, Jazuri Abdullah, and Nur Shazwani Muhammad

Abstract This article reviews some of the recent advances in the analysis of extreme flood events in Malaysia. First, a detailed analysis of daily rainfall precipitation measurements leads to new understanding regarding Malaysian monsoons: the conditional probability of rainfall steadily increases as a function of the number of successive rainy days. The probability of multiday rainfall events has also been analyzed using stochastic models like DARMA(1,1) to demonstrate lower periods of returns of large precipitation amounts for rainfall events between 4 and 12 days. Advances in numerical modeling of surface runoff using the TREX model allowed improved simulations of large floods when considering rainfall amounts between the 2- and 100-year events and the PMP for extreme floods on both small to large watersheds in Malaysia. Examples on Lui, Semenyih, and Kota Tinggi have also been possible with GIS data at 30–90 m resolution. The recent floods of the Kota Tinggi and Muda River are also briefly discussed. Finally, a brief overview of the DID River Management Manual is also presented.

Keywords Monsoon precipitation • Extreme floods • Flashflood modeling • River management

1 Introduction

Southeast Asia has long experienced a monsoon climate with dry and wet seasons. With a mean annual rainfall precipitation around 2,500 mm and locally in excess of 5,000 mm, the very intense rainstorms in the steep mountains of Malaysia have caused frequent and devastating flash floods. In the valleys, floodwaters spread over very wide flood plains developed for agriculture, predominantly rice paddies and oil

P.Y. Julien (✉)

Department of Civil and Environmental Engineering, Colorado State University, Fort Collins, CO 80523, USA

e-mail: pierre@engr.colostate.edu

J. Abdullah

Flood Control Research Center, Universiti Teknologi MARA, Shah Alam, Selangor, Malaysia

N.S. Muhammad

Department of Civil Engineering, Universiti Kebangsaan Malaysia, Bangi, Selangor, Malaysia

palm. Urbanization and deforestation exacerbate flooding problems due to the increased runoff from impervious areas. The industrial developments fostered a new way of urban life, and flood control in Malaysia is undergoing significant changes.

The objective of this article is to provide a brief description of recent developments in the analysis of new engineering methods for the analysis of extreme floods. The first objective is to describe developments in the analysis of daily rainfall precipitation data under monsoon climates. The second objective is to share some of the developments in hydrologic modeling of extreme surface runoff from exceptional rainstorms on small to large watersheds. The third objective is to illustrate some of the implications in terms of direct applications to recent flood events in Malaysia and specifically on the Muda River and near Kota Tinggi. Finally, a brief overview of the DID manual of River Management will be presented.

2 Extreme Rainfall Precipitation

2.1 Analysis of Daily Rainfall Precipitation

Muhammad [1] recently reviewed the daily rainfall precipitation data at Subang Airport from 1960 to 2011. During this period of 18,993 days, there were 10,092 rainy days with more than 0.1 mm of precipitation. The average daily rainfall is 13 mm and standard deviation 17 mm. She demonstrated that the distribution of rainfall precipitation followed a gamma distribution. The equation of the probability density function can be approximated as

$$f(x, t) \cong \frac{1}{|24.0|\Gamma(0.6t)} \left(\frac{x}{24.0}\right)^{0.6t-1} \exp\left(-\frac{x}{24.0}\right) \quad (1)$$

where x is the daily rainfall depth in mm, and t is the number of consecutive rainy days. The cumulative distribution function is the integral of Eq. (1). As shown in Fig. 1, there is a 37 % probability that the total precipitation from six consecutive rainy days will exceed 100 mm. It is interesting to note that the NE and SW monsoons produced fairly similar rainfall distributions at that location.

One of the main findings from her research was that the conditional probability of rainy days increased with the number of consecutive rainy days as shown in Fig. 2. Monsoon rainfall events cannot be considered to be independent.

Muhammad [1] then developed a detailed DARMA(1,1) model for the simulation of long sequences of wet and dry days including the amount of daily precipitation. The main results of this analysis have demonstrated that the periods of return of the amount of precipitation from multiple rainy days vary with the number of rainy days as shown in Fig. 3. The agreement between the DARMA(1,1) model

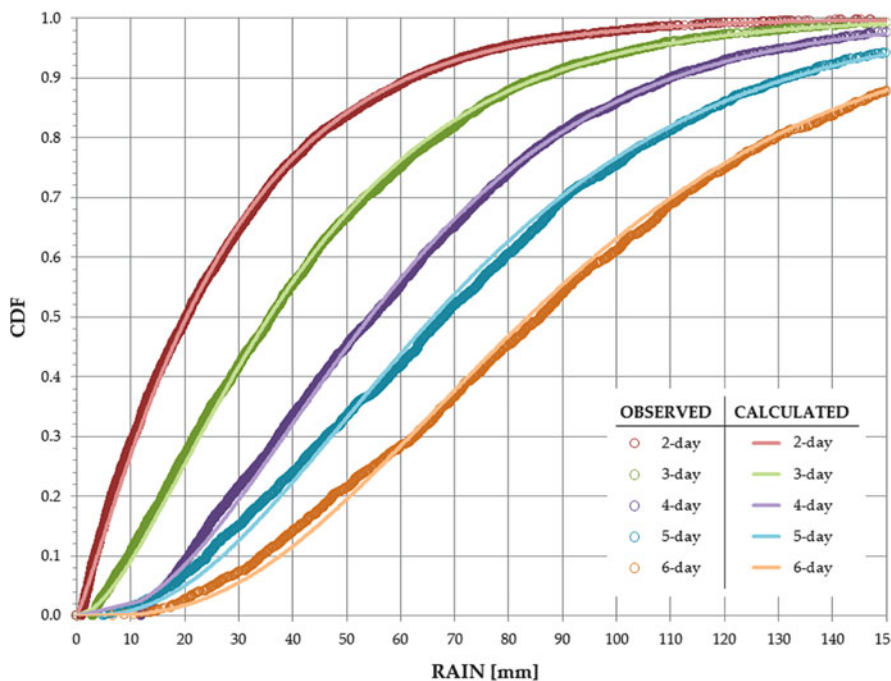


Fig. 1 Multiday cumulative distribution functions for the daily rainfall data at Subang Airport from 1960 to 2011, from Muhammad [1]

simulations and the field measurements was excellent. For instance, the accumulation of 120 mm of rainfall in a single day has a period of return of approximately 20 years; however, when accumulated over eight consecutive rainy days, the period of return is now reduced to approximately 2 years.

Daily rainfall simulation sequences up to 1,000,000 days (i.e., ~2,700 years) are readily possible as shown in Fig. 4. For instance, it now becomes possible to predict that a 250 mm rainfall in 4 days will have a period of return of about 500 years. The extension of daily precipitation analysis to rare and extreme events can now be better investigated using this methodology. The practical implications of this research are most important for the analysis of floods on large watersheds, i.e., larger than 1,000 km².

2.2 Return Periods and Probable Maximum Precipitation

Abdullah [2] recently examined the frequency distribution of rainfall precipitation as a function of storm duration for the State of Selangor. His analysis of data from several sources led to Fig. 5 where large events are comprised between the two lines with a period of return of 2–100 years. The world maximum precipitation (WMP)

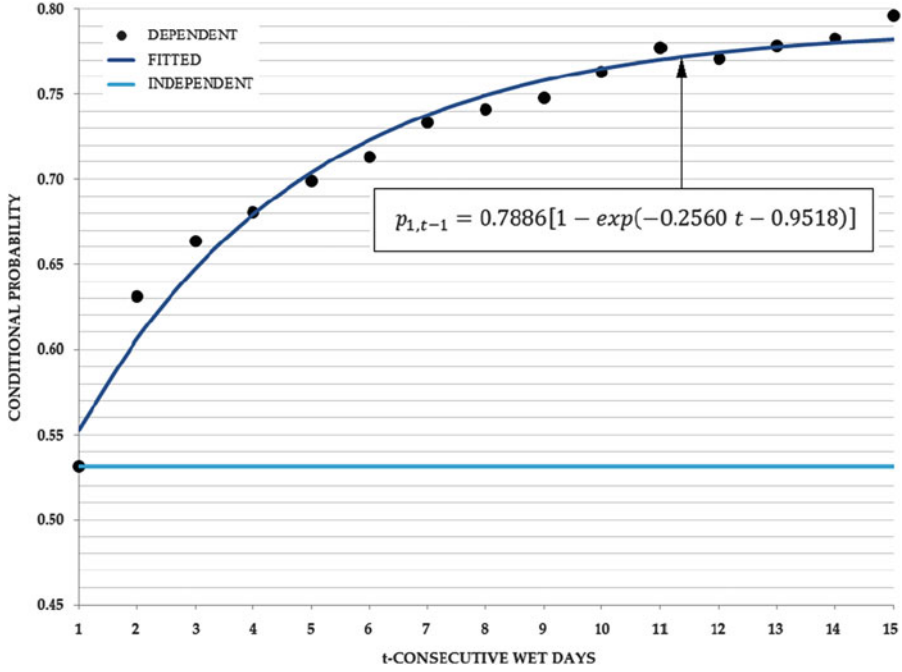


Fig. 2 Increase in conditional probability of rainfall at Subang Airport, from Muhammad [1]

events can be found on the top line with the probable maximum precipitation (PMP) for Selangor between the WMP and the 100 year rainfall precipitation. It is observed that the 100-year precipitation is approximately two times the 2-year rainfall precipitation event, and the rainfall depth increases approximately with the square root of rainfall duration. This means that the average rainfall intensity gradually decreases with rainfall duration. The PMP for the State of Selangor is approximately three times the 100-year rainfall depth and half the world maximum precipitation.

3 Large Flood Simulation with TREX

Abdullah [2] successfully applied the fully distributed two-dimensional TREX model to the simulation of infiltration, overland runoff, and channel flow during extreme rainfall events on small and large watersheds in Malaysia. There are four main processes in the TREX hydrological sub-model developed by Velleux et al. [3, 4]: (1) precipitation and interception; (2) infiltration and transmission loss; (3) depression storage; and (4) overland and channel flow.

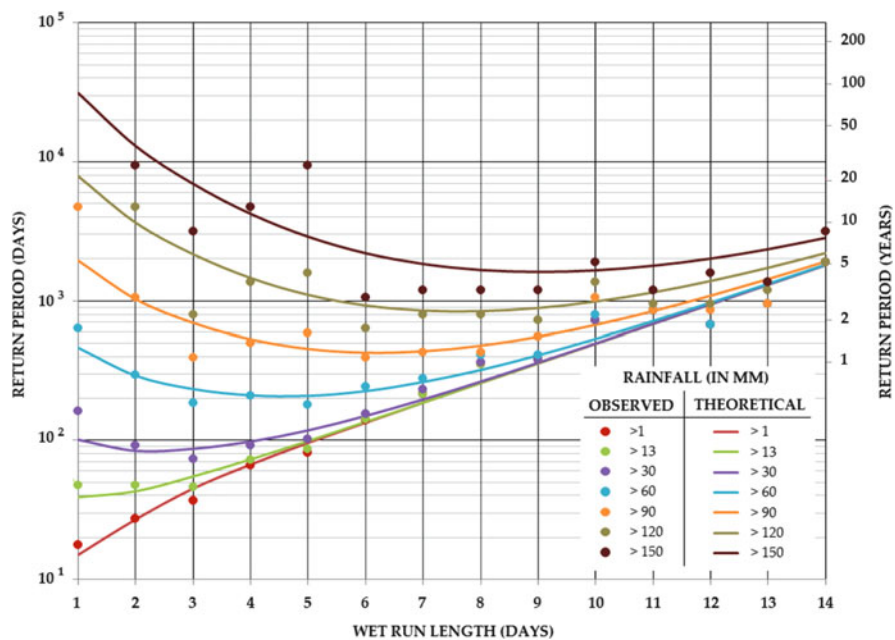


Fig. 3 Return period of multiple rainy days as a function of the cumulative rainfall precipitation, from Muhammad [1]

3.1 Precipitation and Interception

The precipitation volume reaching the near surface can be written as the product of rainfall intensity and surface area. The presence of forests or other vegetation influences the distribution pattern of the net rainfall precipitation. Some of the precipitation is intercepted and retained by the leaves and other parts of the canopy, and then eventually returned to the atmosphere in the form of evaporation.

3.2 Infiltration and Transmission Losses

In the TREX model, the infiltration rate is calculated using the well-known Green and Ampt equation. Transmission losses describe the water reaching the ground-water, overbank flow onto floodplains, wetlands and billabongs, and water never returning to the river. The rate of transmission may be affected by several factors, particularly the soil hydraulic conductivity.

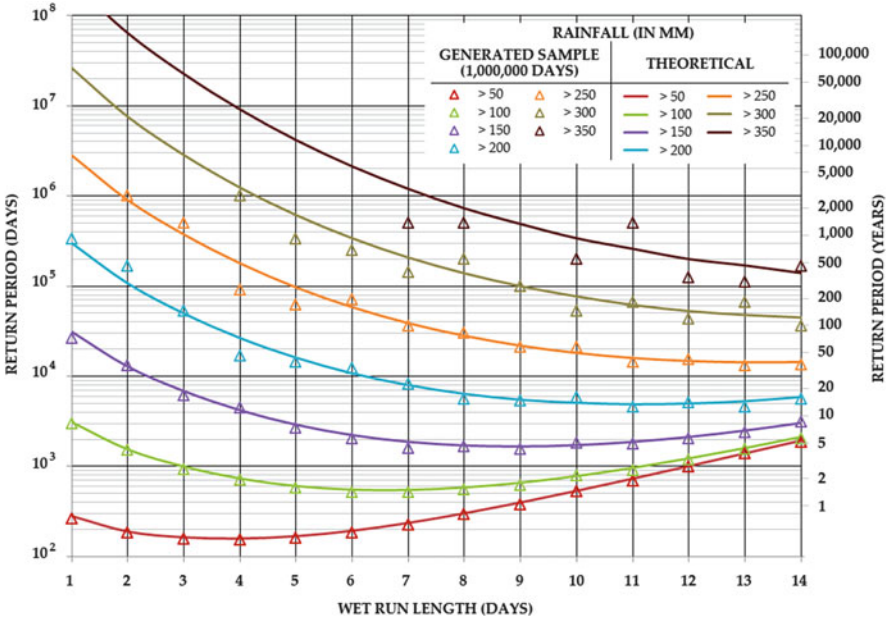


Fig. 4 Extension of the return period analysis of multiple rainy day precipitation by using the DARMA(1,1) model, from Muhammad [1]

3.3 Depression Storage

Precipitation retained in small surface depressions is called the depression storage, which may be conceptualized as a depth when normalized by the surface area. When the water depth is below the depression storage threshold, overland flow is zero. Note that water in depression storage is still subject to infiltration and evaporation. Similar to depression storage in overland areas, water in channels may be stored in depressions in the stream bed, which are caused when the channel water depth falls below some critical level, flow is zero and the water surface has discontinuities, but individual pools of water remain. This mechanism is termed dead storage. Note that the water in dead storage is still subjected to transmission losses and evaporation. For single storm events, the recovery of depression storage volume by evaporation can be neglected. Similarly, the recovery of dead storage volume by evaporation can also be neglected for single storm events.

3.4 Overland and Channel Flow

Overland flow occurs when the water depth of the overland plane exceeds the depression storage threshold. Overland flow is governed by the conservation of

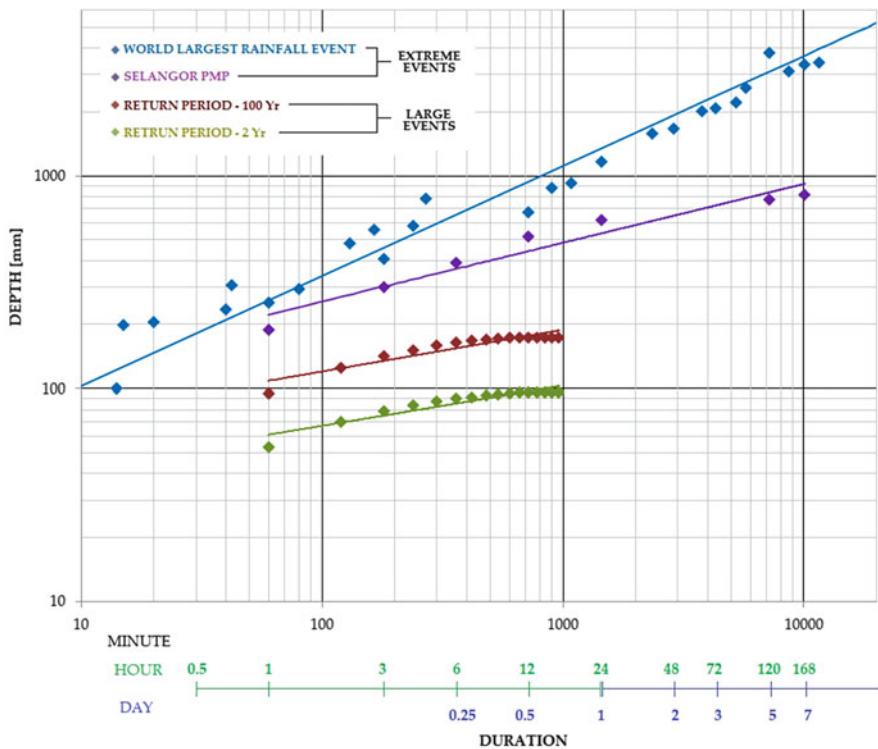


Fig. 5 Rainfall depth vs. duration for the 2-year, 100-year, the PMP-Malaysia and the world maximum precipitation for small and medium watersheds in Selangor, from Abdullah [2]

mass (continuity) and conservation of momentum. The two-dimensional vertically integrated continuity equation for gradually varied flow over a plane in rectangular coordinates is used in the TREX model.

The application of momentum equations (Saint-Venant equations) for two-dimensional runoff calculations are derived in terms of net forces per unit mass or acceleration. Five hydraulic variables must be defined in terms of depth-discharge relationship to describe flow resistance before the overland flow equations can be solved.

One-dimensional channel flow (along the channel in the down-gradient direction which laterally and vertically integrated) is also governed by conservation of mass (continuity) and momentum. The method suggested by Julien [5] is applied for gradually varied flow. To solve the channel flow equations, from the momentum equation (by neglecting the local and convective terms), the diffusive wave approximation may be used for the friction slope. The Manning relationship is used to describe resistance to flow.

3.5 Model Parameters

The TREX model simulates infiltration, overland runoff, and channel flow during extreme rainfall events. Input data were prepared using ArcGIS 9.3 and converted into a text file. The surface topography of the watershed was discretized at a 230 by 230 m scale. The grid size was used to delineate these watersheds. The DEM was downloaded at a 90 m resolution from the ASTER GDEM website. The watershed was described with a total of 31,000 active grid cells within a matrix of 292 rows and 292 columns. The total river length of the large watershed was ~250 km (1,081 nodes and 42 links).

Calibrated model parameters and modeling details can be found in Abdullah [2]. A sensitivity analysis showed that the hydraulic conductivity, K_h , and Manning, n , are the most sensitive parameters during calibration. These values were adjusted to achieve very good agreement between observed and simulated discharges. The antecedent moisture condition for the watershed was assumed to be dry at the beginning of simulation. Rainfall was generally sufficiently abundant to neglect interception and detention storage.

The TREX model provides illustrations of the evolution of flow depth with time during a flood event. It can provide maps of the distribution of flow depth at different times. For instance, Fig. 6 illustrates the simulation of an extreme event on the Semenyih watershed by Abdullah [2].

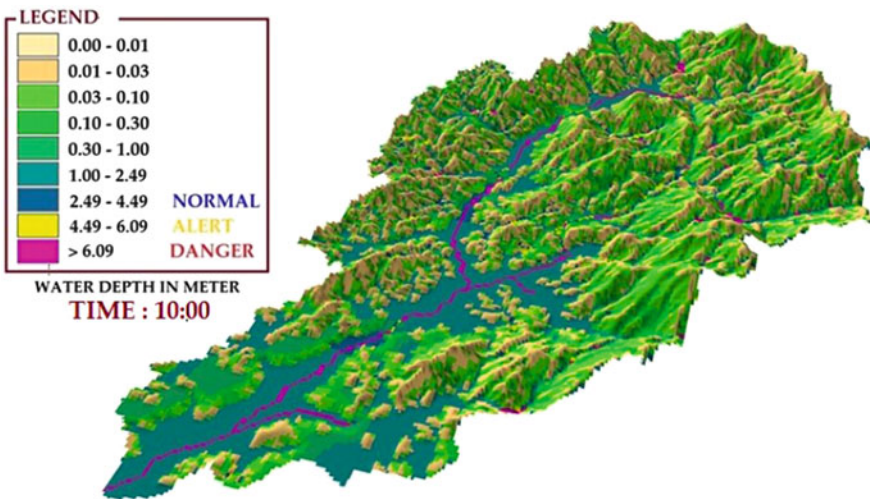


Fig. 6 Illustration of the distribution in flow depth on the Semenyih watershed, from Abdullah [2]

4 Kota Tinggi Flood

Shafie [6] compiled the information relevant to the extreme rainfall precipitation leading to the Kota Tinggi flood. During the calibration, in the TREX model, Abdullah [2] was able to simulate the hydrological conditions of the Kota Tinggi Flood with reasonable accuracy, as shown in Fig. 7.

The validation process was performed using stage data from December 14, 2006 to January 25, 2007 as shown in Figs. 8 and 9.

Figure 8 shows a detailed water depth distribution on the Kota Tinggi watershed from the TREX model at the time when the water reached the alert level on December 19, 2006. The stage continued to increase and easily passed the alert and danger levels as a result of the continuous rainfall. Figure 9 shows the TREX model results in terms of the flooding areas on the Kota Tinggi watershed on December 21, 2006. The maximum stage was reached on December 22, 2006, i.e., 2 days after the rainfall stopped.

The model gave very good estimates of the peak discharge and total volume with average overestimation of about 0.8 % and 1.5 %, respectively. The hydrological modeling results presented here give a physical representation of the flooding at Kota Tinggi. The results further prove that the multiday rainfall events are the main causes of severe flooding on this large watershed.

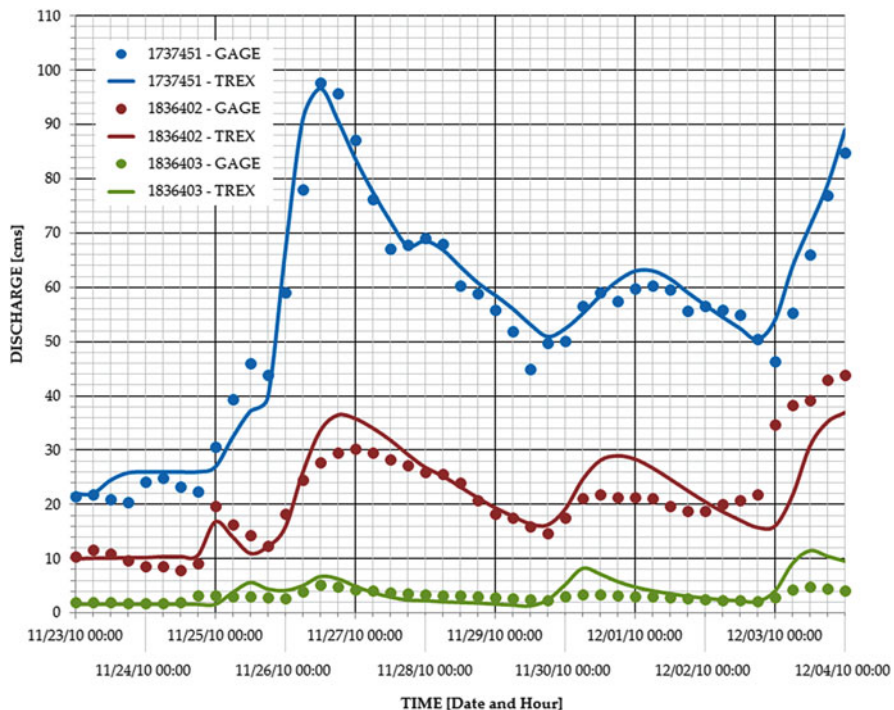


Fig. 7 Calibration results of the TREX model applied to the Kota Tinggi watershed, from Abdullah [2]

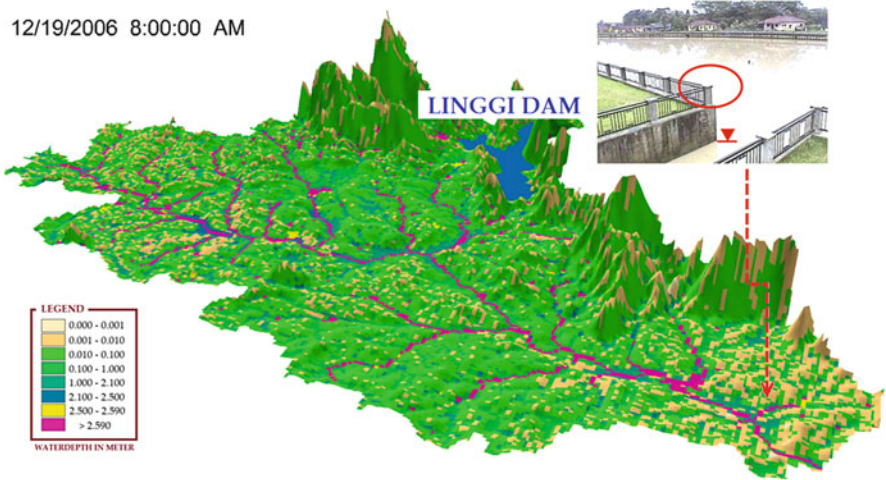


Fig. 8 TREX simulation of the Kota Tinggi Flood on December 19, 2006, from Abdullah [2]

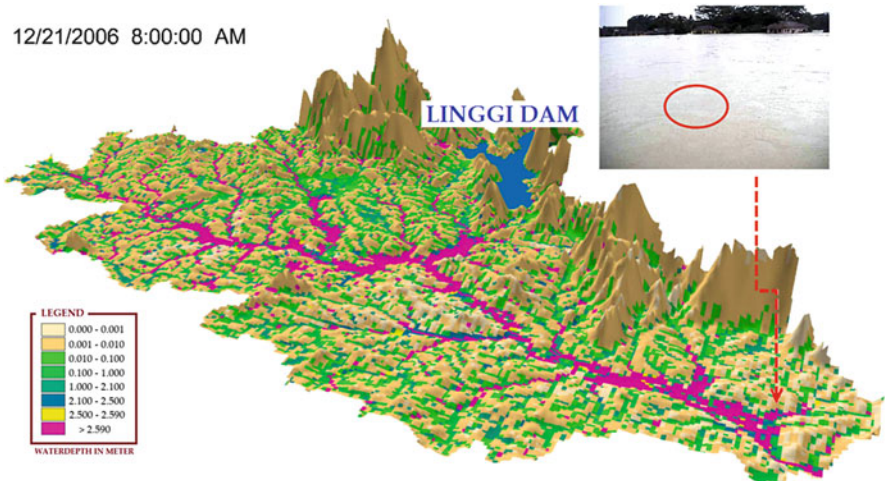


Fig. 9 TREX simulation of the Kota Tinggi Flood on December 21, 2006, from Abdullah [2]

Figure 10 illustrates the relationship between the estimated flood thresholds, return periods, and flood thresholds. A return period of 220 years (upper value) is the flood threshold for 1 day of rainfall. Overall, the return period estimated for the multiday rainfall is significantly lower than a single day event. For example, the return period to reach the flood threshold in four consecutive rainy days is only 24 years.

These results are useful in determining the design rainfall for a flood mitigation structure on a large watershed like the case of the Kota Tinggi flood.

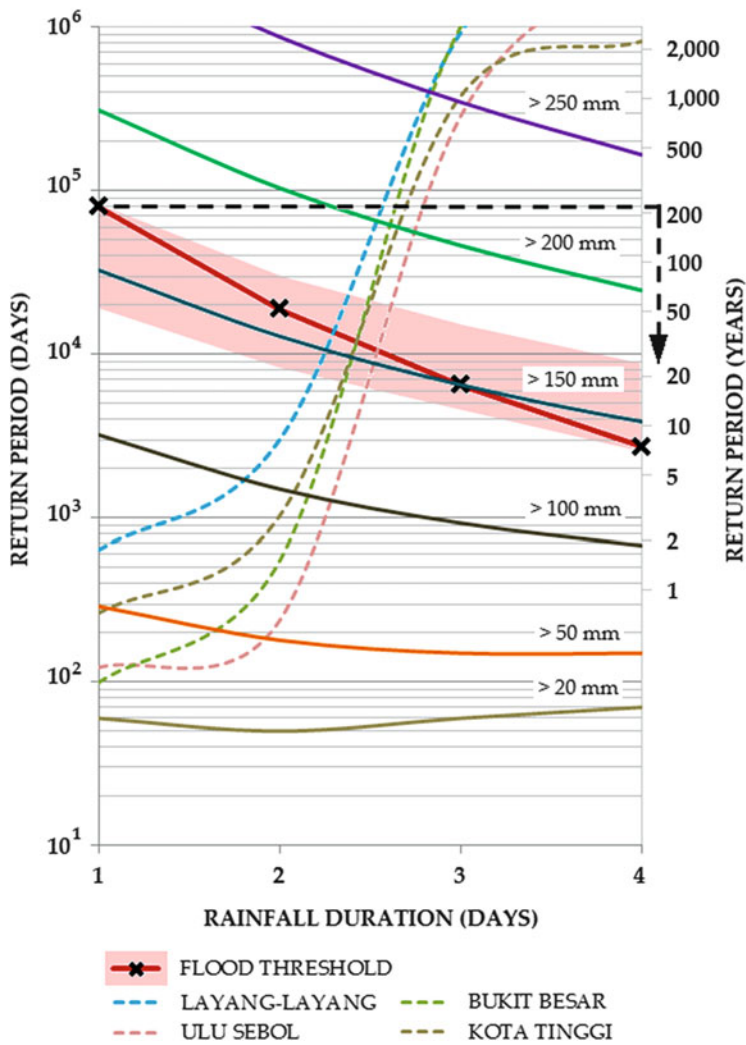


Fig. 10 Return period of multiple rainy days as a function of the cumulative rainfall precipitation and flooding threshold, from Muhammad [1]

5 Muda River Flood

The Muda River in Malaysia experiences floods every year, and the floods of 1996, 1998, and 1999 were particularly high. The Department of Irrigation and Drainage (DID) in Malaysia (Jabatan Pengairan dan Saliran Malaysia is also known as JPS) enacted a Flood Control Remediation Plan. Figure 11 illustrates the aerial extent of this flood, which adversely impacted 45,000 people in the State of Kedah.

