

Kimon P. Valavanis
Randal Beard
Paul Oh

Anibal Ollero
Leslie Piegl
Hyunchul Shim
Editors

Selected Papers from the 2nd Inter- national Symposium on UAVs, Reno, Nevada, U.S.A., June 8–10, 2009



Springer

Selected papers from the 2nd International
Symposium on UAVs, Reno, Nevada, U.S.A.
June 8–10, 2009

Kimón P. Valavanis · Randal Beard · Paul Oh ·
Aníbal Ollero · Leslie A. Piegl · Hyunchui Shim
Editors

Selected papers from the
2nd International Symposium
on UAVs, Reno, Nevada, U.S.A.
June 8–10, 2009

Previously published in *Journal of Intelligent
and Robotic Systems*,
Volume 57, Issues 1–4 2010



Springer

Editors

Kimon P. Valavanis
Department of Electrical
and Computer Engineering, CMK 300
School of Engineering
and Computer Science
University of Denver
Denver CO 80208, USA
Kimon.valavanis@du.edu

Randal Beard
Brigham Young University
Dept. Electrical & Computer Engineering
Provo UT 84602, USA
beard@ee.byu.edu

Paul Oh
Drexel University
Applied Engineering Technology Program
3001 One Drexel Plaza, Market St.
Philadelphia PA 19104, USA

Aníbal Ollero
Universidad de Sevilla
Escuela Superior de Ingenieros
Depto. Ingeniera Sistemas y Automática
Camino de los Descubrimientos,
s/n 41092 Sevilla, Spain
aollero@cartuja.us.es

Leslie A. Piegł
University of South Florida
Dept. Computer Science & Engineering
4202 E. Fowler Ave.
Tampa FL 33620, USA

Hyunchui Shim
Korea Advanced Institute of Science
& Technology (KAIST)
Department of Aerospace Engineering
373-1 Guseong-dong Daejeon
305-701 Yuseong-gu
Republic of South Korea
hcsim@kaist.ac.kr

ISBN 978-90-481-8763-8
Springer Dordrecht Heidelberg London New York

Library of Congress Control Number: 2009943828

© Springer Science+Business Media B.V. 2010

No part of this work may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, microfilming, recording or otherwise, without written permission from the Publisher, with the exception of any material supplied specifically for the purpose of being entered and executed on a computer system, for exclusive use by the purchaser of the work.

Printed on acid-free paper

Springer is part of Springer Science+Business Media (www.springer.com)

Journal of Intelligent and Robotic Systems

Volume 57 · Numbers 1–4 · March 2010

Special Issue: Selected papers from the 2nd International Symposium on UAVs, Reno, U.S.A. June 8–10, 2009

Guest Editors: Kimon P. Valavanis, Randy Beard, Paul Y. Oh, Anibal Ollero, Les A. Piegl, Hyunchul Shim

EDITORIAL

From the Editor-in-Chief

K.P. Valavanis 1

Accurate Modeling and Robust Hovering Control for a Quad-rotor VTOL Aircraft

J. Kim · M.-S. Kang · S. Park 9

Modeling and System Identification of the muFly Micro Helicopter

D. Schafrroth · C. Bermes · S. Bouabdallah · R. Siegwart 27

Vision-based Position Control of a Two-rotor VTOL miniUAV

E. Rondon · S. Salazar · J. Escareno · R. Lozano 49

A Survey of Motion Planning Algorithms from the Perspective of Autonomous UAV Guidance

C. Goerzen · Z. Kong · B. Mettler 65

An Efficient Path Planning and Control Algorithm for RUAV's in Unknown and Cluttered Environments

K. Yang · S.K. Gan · S. Sukkarieh 101

On the Generation of Trajectories for Multiple UAVs in Environments with Obstacles

A. Alves Neto · D.G. Macharet · M.F.M. Campos 123

Integration of Path/Maneuver Planning in Complex Environments for Agile Maneuvering UCAVs

E. Koyuncu · N.K. Ure · G. Inalhan 143

A Cost Effective Tracking System for Small Unmanned Aerial Systems

M. Kontitsis · K. Valavanis 171

Vision-Based Road-Following Using Proportional Navigation

R.S. Holt · R.W. Beard 193

A Vision-Based Automatic Landing Method for Fixed-Wing UAVs

S. Huh · D.H. Shim 217

A Vision-Based Guidance System for UAV Navigation and Safe Landing using Natural Landmarks

A. Cesetti · E. Frontoni · A. Mancini · P. Zingaretti · S. Longhi 233

Autonomous Vision-Based Helicopter Flights Through Obstacle Gates

F. Andert · F.-M. Adolf · L. Goormann · J.S. Ditttrich 259

Exploring the Effect of Obscurants on Safe Landing Zone Identification

K.W. Sevcik · N. Kuntz · P.Y. Oh 281

Low-Cost Visual Tracking of a Landing Place and Hovering Flight Control with a Microcontroller

K.E. Wenzel · P. Rosset · A. Zell 297

Landing and Perching on Vertical Surfaces with Microspines for Small Unmanned Air Vehicles

A. Lussier Desbiens · M.R. Cutkosky 313

Automating Human Thought Processes for a UAV Forced Landing

P. Eng · L. Mejias · X. Liu · R. Walker 329

Autonomous Autorotation of Unmanned Rotorcraft using Nonlinear Model Predictive Control

K. Dalamagkidis · K.P. Valavanis · L.A. Piegl 351

Multimodal Interface Technologies for UAV Ground Control Stations

I. Maza · F. Caballero · R. Molina · N. Peña · A. Ollero 371

Multi-UAV Simulator Utilizing X-Plane

R. Garcia · L. Barnes 393

UAS Flight Simulation with Hardware-in-the-loop Testing and Vision Generation

J. Saunders · R. Beard 407

Multi-UAV Cooperation and Control for Load Transportation and Deployment

I. Maza · K. Kondak · M. Bernard · A. Ollero 417

Flyphone: Visual Self-Localisation Using a Mobile Phone as Onboard Image Processor on a Quadrocopter

S. Erhard · K.E. Wenzel · A. Zell 451

A Rotary-wing Unmanned Air Vehicle for Aquatic Weed Surveillance and Management

A.H. Göktoğan · S. Sukkarieh · M. Bryson · J. Randle · T. Lupton · C. Hung 467

Development and Evaluation of a Chase View for UAV Operations in Cluttered Environments

J.T. Hing · K.W. Sevcik · P.Y. Oh 485

Design Methodology of a Hybrid Propulsion Driven Electric Powered Miniature Tailsitter Unmanned Aerial Vehicle

M. Aksugur · G. Inalhan 505

Abstracted/Indexed in *Academic OneFile, Compendex, CompuScience, CSA/Proquest, Current Abstracts, Current Contents/Engineering, Computing and Technology, Ergonomics Abstracts, Gale, Google Scholar, Journal Citation Reports/Science Edition, OCLC, PsycINFO, Science Citation Index Expanded (SciSearch), SCOPUS, Summon by Serial Solutions, TOC Premier, VINITY - Russian Academy of Science.*

Instructions for Authors for *J Intell Robot Syst* are available at <http://www.springer.com/10846>.

From the Editor-in-Chief

Kimon P. Valavanis

Published online: 7 November 2009
© Springer Science + Business Media B.V. 2009

Dear Colleagues,

I wish you a Happy New Year, full of health, happiness, prosperity, success, and may all your wishes become reality.

I take this opportunity to thank all the past, currently serving and joining members of the Editorial Board for what they have done, for what they are doing and for what they will do to help improve JINT. I express my most sincere gratitude to the Springer team (Nathalie, Anneke, Gabriela, Joey and now Marie Beth) for ‘keeping up’ with us, and to Dina for keeping me ‘under control’.

We start this New Year with high hopes and with new initiatives. As a start, and for the first time, the whole Editorial Board members and our photos are included in this Volume.

From now on we will publish 16 issues per year, one Volume every quarter, with issues 3 and 4 in each Volume being double issues, thus we will still have 12 printings per year. The overwhelming number of submitted papers and all other related activities are forcing us to respond to our readers and accommodate them in the best possible way. In parallel, we will have the flexibility to publish special issues every year! We still aim at publishing the best papers, we are still very selective, we will continue to thrive for excellence.

JINT is improving. This has been the third year in a row where our impact factor is higher than the year before. Even though I have heard arguments that impact factors

K. P. Valavanis (✉)
Journal of Intelligent and Robotic Systems,
Department of Electrical and Computer Engineering,
School of Engineering and Computer Science,
University of Denver, Denver, CO 80208, USA
e-mail: kvalavan@du.edu

may not reflect reality at all times, I take it as a sign of finding our place under the sun. Somehow, I believe that in the next few years we will have the respect we certainly deserve. We should keep up the good work and work even harder.

The issue at hand is a special issue on Unmanned Aircraft Systems. It includes peer reviewed extended and enhanced versions of papers accepted and presented at the 2nd International Symposium on UAVs, which took place in Reno, NV, in June of 2009. The list of papers is included. The areas covered by the papers are:

- UAS Modeling, Control and Identification
- UAS Navigation, Path Planning and Tracking
- UAS Vision and Vision-Based Systems
- Landing and Forced Landing
- Simulation Platforms and Testbeds
- UAS Applications

I hope you enjoy the issue.

A handwritten signature in black ink, appearing to read 'K. Valavanis', with a long horizontal flourish extending to the right.

Kimon P. Valavanis
Editor-in-Chief

JINT EDITORIAL BOARD-EFFECTIVE JANUARY 2010

FOUNDING EDITOR

Dr. Spyros Tzafestas
National Technical University of Athens, School of ECE
e-mail: tzafesta@softlab.ntua.gr



EDITOR-IN-CHIEF

Dr. Ing. Prof. Kimon P. Valavanis
University of Denver, CO, USA
e-mail: Kimon.Valavanis@du.edu



ASSISTANT TO THE EDITOR-IN-CHIEF

Ms. Dina Fragedaki
ELKE, Technical University of Crete
e-mail: fragedaki@gmail.com



ADVISORY BOARD

Dr. Toshio Fukuda
(Asia/Oceania)
fukuda@mein.nagoya-u.ac.jp



Dr. Gerd Hirzinger
(Europe)
gerd.hirzinger@dlr.de



Dr. George Vachtsevanos
(The Americas)
gjev@ece.gatech.edu



BOOK REVIEW EDITOR

Dr. Yannis Phillis
Technical University of Crete
e-mail: phillis@dpem.tuc.gr



EDITORS-AT-LARGE

The Americas

Dr. Nikos Papanikolopoulos
University of Minnesota
e-mail: npapas@cs.umn.edu



Europe

Dr. Roland Siegwart
ETH Zurich
e-mail: rsiegwart@ethz.ch



Asia/Oceania

Dr. Shuzhi Sam Ge
The National University of Singapore
e-mail: elegendz@nus.edu.sg



SENIOR EDITORS

Dr. Krzysztof Kozłowski
Poznan University of Technology
e-mail: krzysztof.kozłowski@put.
poznan.pl



Dr. Vassilis Kouikoglou
Technical University of Crete
e-mail: kouik@dpem.tuc.gr



Dr. Les A. Piegł
University of South Florida
e-mail: lap@cse.usf.edu



Dr. Sauro Longhi
Università Politecnica
delle Marche
e-mail: sauro.longhi@univpm.it



Dr. Alfredo Weitzenfeld
Instituto Tecnológico Autónomo
de México
e-mail: alfredo@itam.mx



Dr. Bum-Jae You
Korean Institute for Science
and Technology
e-mail: ybj@kist.re.kr



Dr. Bernard Mettler
University of Minnesota
e-mail: mettler@aem.umn.edu



Dr. Paul Oh
Drexel University
e-mail: paul@coe.drexel.edu



Dr. Zoran Vukic
University of Zagreb
e-mail: zoran.vukic@fer.hr



Dominique Sauter
Nancy-University, France
e-mail: dominique.sauter@cran.uhp-nancy.fr



EDITORS

Dr. Beno Benhabib
University of Toronto
e-mail: benhabib@mie.utoronto.ca



Dr. Stjepan Bogdan
University of Zagreb
e-mail: stjepan.bogdan@fer.hr



Dr. Sesh Commuri
University of Oklahoma
e-mail: scommuri@ou.edu



Dr. Aydan M. Erkmén
Middle East Technical University
e-mail: aydan@metu.edu.tr



Dr. Rafael Fierro
University of New Mexico
e-mail: rfierro@ece.unm.edu



Dr. Hui Jun Gao
Harbin Institute of Technology
e-mail: hjgao@hit.edu.cn



Dr. Fumiya Iida
CS & AI, MIT
e-mail: iida@csail.mit.edu



Dr. Sanjay Joshi
UC Davis
e-mail: maejoshi@ucdavis.edu



Dr. Abderrahmane Kheddar
France
e-mail: kheddar@iup.univ-evry.fr, abderrahmane.kheddar@aist.go.jp



Dr. Derek Kingston
WP Air Force Base
Derek.Kingston@WPAFB.
AF.MIL



Dr. Fumitoshi Matsuno
Kyoto University
e-mail: matsuno@me.kyoto-u.ac.jp



Dr. Giovanni Muscato
Università degli Studi
di CATANIA
e-mail: gmscato@dees.unict.it



Dr. Dan Popa
ARRI, UT Arlington
e-mail: popa@arri.uta.edu



Dr. Nilanjan Sarkar
Vanderbilt University
e-mail: nilanjan.sarkar@vanderbilt.edu



Dr. Javier Ruiz-del-Solar
Universidad de Chile
e-mail: jruizd@cec.uchile.cl



Dr. Yuan Yan Tang
Hong Kong Baptist University
e-mail: yytang@comp.hkbu.
edu.hk



Dr. Costas Tzafestas
National Technical University
of Athens
e-mail: ktzaf@softlab.ece.
ntua.gr



Dr. Miklos Vajta
University of Twente
e-mail: m.vajta@math.
utwente.nl



Dr. Ljubo Vlacic
Griffith University
e-mail: l.vlacic@griffith.
edu.au



Dr. Long Wang
Peking University
e-mail: longwang@pku.
edu.cn



Dr. Jing Xiao
U of North Carolina —
Charlotte
e-mail: xiao@uncc.edu



Dr. Nikos Tsoveloudis
Technical University of Crete
e-mail: nikost@dpem.tuc.gr



Dr. Ali Goktogan
Australian Centre for
Field Robotics, USYD
e-mail: a.goktogan@cas.edu.au



Dr. Ahmad Rad
Simon Fraser University
e-mail: arad@sfu.ca



Accurate Modeling and Robust Hovering Control for a Quad-rotor VTOL Aircraft

Jinhyun Kim · Min-Sung Kang · Sangdeok Park

Received: 1 February 2009 / Accepted: 1 August 2009 / Published online: 17 September 2009
© Springer Science + Business Media B.V. 2009

Abstract Quad-robot type (QRT) unmanned aerial vehicles (UAVs) have been developed for quick detection and observation of the circumstances under calamity environment such as indoor fire spots. The UAV is equipped with four propellers driven by each electric motor, an embedded controller, an Inertial Navigation System (INS) using three rate gyros and accelerometers, a CCD (Charge Coupled Device) camera with wireless communication transmitter for observation, and an ultrasonic range sensor for height control. Accurate modeling and robust flight control of QRT UAVs are mainly discussed in this work. Rigorous dynamic model of a QRT UAV is obtained both in the reference and body frame coordinate systems. A disturbance observer (DOB) based controller using the derived dynamic models is also proposed for robust hovering control. The control input induced by DOB is helpful to use simple equations of motion satisfying accurately derived dynamics. The developed hovering robot shows stable flying performances under the adoption of DOB and the vision based localization method. Although a model is incorrect, DOB method can design a controller by regarding the inaccurate part of the model

J. Kim

Department of Mechanical Engineering, Seoul National University of Technology,
Seoul, South Korea
e-mail: jinhyun@snut.ac.kr

M.-S. Kang

Department of Mechatronics Engineering, Hanyang University,
Ansan, South Korea
e-mail: wowmecha@gmail.com

S. Park (✉)

Division of Applied Robot Technology, Korea Institute of Industrial Technology,
Ansan, South Korea
e-mail: sdpark@kitech.re.kr

and sensor noises as disturbances. The UAV can also avoid obstacles using eight IR (Infrared) and four ultrasonic range sensors. This kind of micro UAV can be widely used in various calamity observation fields without danger of human beings under harmful environment. The experimental results show the performance of the proposed control algorithm.

Keywords Hovering control • QRT (quad-rotor type) UAV (unmanned aerial vehicle) • VTOL (vertical take-off and landing)

1 Introduction

Recently, researches on Unmanned Aerial Vehicles (UAVs) have been vigorously being performed for calamity observation such as woods and building fires, meteorological observation, patrol, and spraying agricultural chemicals to military purpose such as reconnaissance, monitoring, and communication etc. Moreover, the technology development of the UAVs is getting faster according to the rapid progress of electronic and computer technology. Micro UAVs can be operated on wide area regardless of the effect of ground configuration. The merit of UAVs is maximized for the practical use in the places where it is dangerous and difficult to approach. Further, micro UAVs are much cheaper and safer in dangerous tasks than piloted aircrafts.

Micro UAVs are classified into two categories, fixed and rotary wing types. The rotary wing type UAVs are more advantageous than the fixed wing type ones in the sense of VTOL (Vertical Take-off and Landing), omni-directional flying, and hovering performances. Rotary wing type UAVs are classified into quad-rotor type (QRT), co-axial helicopter, and helicopter etc. QRT UAVs have the simplest mechanical structure among them, and that is the reason why a QRT UAV is considered in this study as a flying platform.

QRT UAVs with various shape and size have been developed for commercial and research purposes, and some models are being sold as RC toys. Autonomous QRT UAVs equipped with high technology sensors are also being developed for special purposes, and researches for analysis and control of the flying robots are being done vigorously.

V. Mistler et al. derived the dynamic model for a four rotors helicopters, and developed a dynamic feedback controller [1]. P. McKerrow obtained the dynamic model for theoretical analysis of a dragonfly [2]. A. Mokhtari and A. Benallegue obtained a nonlinear dynamic model of a QRT UAV for state variable control based on Euler angle and an open loop position state observer, emphasized attitude control rather than the translational motion of the UAV [3]. P. Castilo et al. performed autonomous take-off and hovering and landing control of a QRT UAV by synthesizing a controller using the Lagrangian model based on the Lyapunov analysis [4]. S. Bouabdallah et al. performed the design, dynamic modelling, sensing and control of an indoor micro QRT UAV [5]. S. Bouabdallah and R. Siegwart suggested two nonlinear control techniques: a backstepping and a sliding-mode control [6].


Flight control methods utilizing vision systems are also studied. E. Altuğ et al. proposed a visual feedback control method of a QRT UAV using a camera equipped on the UAV as the main sensor for attitude estimation [7]. T. Hamel et al. proposed a vision based visual servo controller for performing trajectory tracking tasks of under-actuated systems like QRT UAVs [8]. T. Hamel and R. Mahony proposed a vision based controller which performs visual servo control by positioning a camera onto a fixed target for the hovering of a QRT UAV [9].

Strictly speaking, earlier dynamic models are lack of mathematical rigorousness. They have dynamic inconsistency as they are expressed using both the reference and body coordinate systems without proper transformation [3, 6, 10–15]. This discrepancy mainly comes from the classical aerodynamic description based on the reference frame which is convenient in the case of using mechanical gyros, while the strip-down type gyros which are widely used in small QRT UAVs due to their compactness are much closer to describe the dynamic model using body frame coordinate system. Therefore, it is required to derive rigorous dynamic models of QRT UAVs both in the reference and body frame coordinate systems.

In the previous research, the linear and angular equations of motion is expressed in the reference frame and in the body frame coordinate, respectively. In some cases, they induced incorrect dynamic equations without consideration of the difference between two coordinates. [3, 6, 10–15]. In addition, for the controller, the angular equations of motion derived in the body frame coordinate is misused as the equations of motion derived in the reference frame without adequate assumptions.

In this paper, the above mentioned two problems will be solved. For the moving base system which is not fixed in an inertial frame, it is not convenient to derive the dynamic formulation using the Lagrangian in terms of the velocities expressed in a body-fixed frame. In UAV systems, the sensor information and actuator forces are exerted on a body-fixed frame, so it is more natural to write up the dynamics using body-fixed velocities. To supplement this, we used quasi-Lagrange approach [16]. The quasi-Lagrange method can give the equations of motion in terms of the body-fixed velocities. Finally the composite equations of motion for a QRT UAV will be derived strictly. In addition, using rigorous assumption—that is the roll and pitch angles are remain near zeros—the angular equations of motion derived in the body frame is induced the equations of motion in the reference frame. To guarantee the assumption, the robust controller based on disturbance observer(DOB) [17] is proposed. DOB is a kind of internal loop compensator which enforces desired nominal model on the original complex dynamic equations. The control input induced by DOB will be helpful to use simple equations of motion as mentioned above satisfying the accurate derived dynamics. In this work, rigorous dynamic models of a QRT UAV are obtained both in the reference and body frame coordinate systems. A disturbance observer(DOB) based controller using the derived dynamic models is also proposed for hovering control. And a vision based localization for the developed QRT UAV are introduced. The performance of the proposed control scheme is verified through experiments using QRT UAVs.


Section 2 shows the basic structure and the dynamics of the UAV. The DOB for flight control algorithms is given in Section 3. Section 4 shows the experimental setup and experimental results including the vision based localization schemes, and followed by concluding remarks in Section 5.

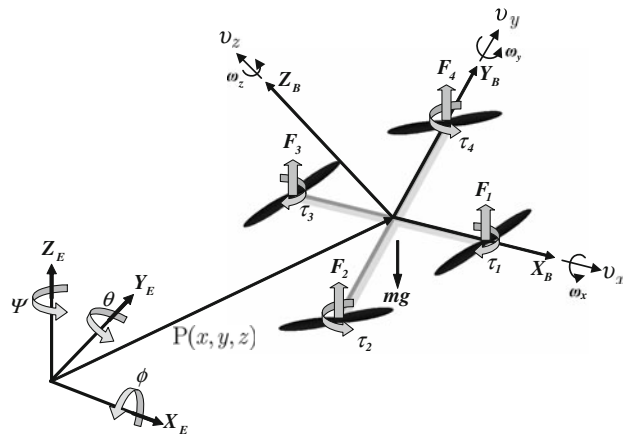Fig. 1 Coordinate system

2 Dynamic Equations of Motion

Figure 1 shows coordinate systems of QRT UAVs. The motion of QRT UAVs is induced by the combination of quad rotors as shown in Fig. 2. The state vectors for the QRT UAVs are described as following:

$$\begin{aligned} \eta &= [\eta_1^T, \eta_2^T]^T; \quad \eta_1 = [x, y, z]^T; \quad \eta_2 = [\phi, \theta, \psi]^T; \\ \mathbf{v} &= [\mathbf{v}_1^T, \mathbf{v}_2^T]^T; \quad \mathbf{v}_1 = [v_x, v_y, v_z]^T; \quad \mathbf{v}_2 = [\omega_x, \omega_y, \omega_z]^T; \end{aligned}$$

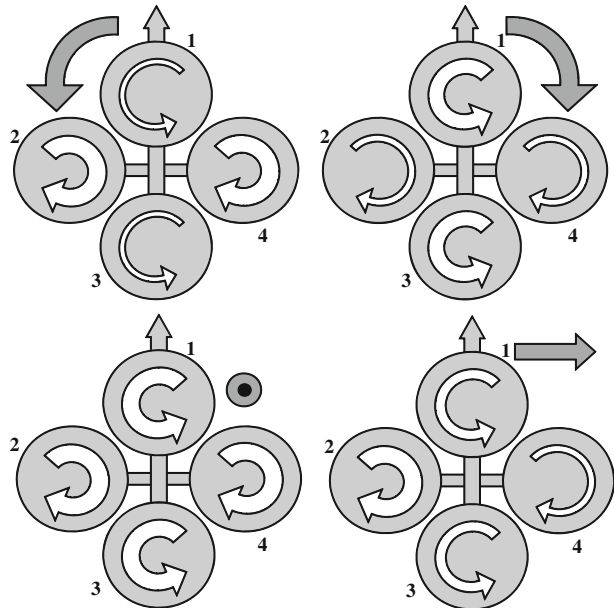Fig. 2 QRT motion principle

where the position and orientation of a QRT UAV, η , are described relative to the inertial reference frame, while the linear and angular velocities of a QRT UAVs, $\mathbf{v}$, are expressed in the body-fixed frame. x , y , and z mean the linear positions of a QRT UAV with respect to inertial reference frame. ϕ , θ , and ψ represent the roll, pitch, and yaw angles of the QRT UAV in the inertial reference frame.

The inertial and body-fixed velocity relation can be represented with a QRT UAV Jacobian matrix [18].

$$\begin{bmatrix} \dot{\eta}_1 \\ \dot{\eta}_2 \end{bmatrix} = \begin{bmatrix} \mathbf{J}_1(\eta_2) & \mathbf{0} \\ \mathbf{0} & \mathbf{J}_2(\eta_2) \end{bmatrix} \begin{bmatrix} \mathbf{v}_1 \\ \mathbf{v}_2 \end{bmatrix} \iff \dot{\eta} = \mathbf{J}(\eta)\mathbf{v}, \quad (1)$$

where

$$\mathbf{J}_1(\eta_2) = \begin{bmatrix} c\psi c\theta & -s\psi c\phi + c\psi s\theta s\phi & s\psi s\phi + c\psi c\phi s\theta \\ s\psi c\theta & c\psi c\phi + s\psi s\theta s\phi & -c\psi s\phi + s\theta s\psi c\phi \\ -s\theta & c\theta s\phi & c\theta c\phi \end{bmatrix}, \quad (2)$$

and

$$\mathbf{J}_2(\eta_2) = \begin{bmatrix} 1 & s\phi\theta & c\phi\theta \\ 0 & c\phi & -s\phi \\ 0 & s\phi/c\theta & c\phi/c\theta \end{bmatrix}. \quad (3)$$

In above equations, $c(\cdot)$ and $s(\cdot)$ denote $\cos(\cdot)$ and $\sin(\cdot)$, respectively. Notice that $\mathbf{J}_2(\eta_2)$ is undefined for a pitch angle of $\theta = \pm 90^\circ$. However, in the QRT UAVs, the system goes into uncontrollable states as approaching the pitch angle. Hence, in this paper, we do not consider the pitch angle. In addition, $\mathbf{J}_2(\eta_2)$ is not orthogonal matrix. Consequently, $\mathbf{J}_2^{-1}(\eta_2) \neq \mathbf{J}_2^T(\eta_2)$.

For the moving base system which is not fixed in an inertial frame, it is not convenient to derive the dynamic formulation using the Lagrangian in terms of the velocities expressed in a body-fixed frame. In QRT UAVs, the sensor information and actuator forces are exerted on a body-fixed frame, so it is more natural to write up the dynamics using body-fixed velocities. To supplement this, we used quasi-Lagrange approach [16]. The quasi-Lagrange method can give the equations of motion in terms of the body-fixed velocities.

2.1 Quasi-Lagrange Equations of Motion

The Lagrangian in general form is defined as

$$L = T - V, \quad (4)$$

$$T = \frac{1}{2} \mathbf{v}^T \mathbf{M} \mathbf{v} = \frac{1}{2} m \mathbf{v}_1^T \mathbf{v}_1 + \frac{1}{2} \mathbf{v}_2^T \mathbf{I} \mathbf{v}_2, \quad (5)$$

$$V = -mgz, \quad (6)$$

where m and $\mathbf{I}$ are mass and system inertia, respectively. Normally, we design the QRT UAV body as axisymmetric, so the inertia is defined as Eq. 7, and especially $I_{xx} = I_{yy}$.

$$\mathbf{I} = \begin{bmatrix} I_{xx} & 0 & 0 \\ 0 & I_{yy} & 0 \\ 0 & 0 & I_{zz} \end{bmatrix} \quad (7)$$

With the extended Hamiltonian principle, Eq. 4 gives following differential equations:

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \mathbf{v}_1} \right) + \mathbf{v}_2 \times \frac{\partial L}{\partial \mathbf{v}_1} - \mathbf{J}_1^T \frac{\partial L}{\partial \boldsymbol{\eta}_1} = \boldsymbol{\tau}_1 \quad (8)$$

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \mathbf{v}_2} \right) + \mathbf{v}_2 \times \frac{\partial L}{\partial \mathbf{v}_2} + \mathbf{v}_1 \times \frac{\partial L}{\partial \mathbf{v}_1} - \mathbf{J}_2^T \frac{\partial L}{\partial \boldsymbol{\eta}_2} = \boldsymbol{\tau}_2 \quad (9)$$

Then,

$$\mathbf{M}\dot{\mathbf{v}} + \mathbf{C}\mathbf{v} + \mathbf{g} = \boldsymbol{\tau}. \quad (10)$$

Finally, the 6 independent equations of motions are obtained as following:

$$m [\dot{v}_x - v_y \omega_z + v_z \omega_y - g \sin \theta] = 0, \quad (11)$$

$$m [\dot{v}_y - v_z \omega_x + v_x \omega_z + g \cos \theta \sin \phi] = 0, \quad (12)$$

$$m [\dot{v}_z - v_x \omega_y + v_y \omega_x + g \cos \theta \cos \phi] = u_1, \quad (13)$$

$$I_{xx} \dot{\omega}_x + (I_{zz} - I_{yy}) \omega_y \omega_z = u_2, \quad (14)$$

$$I_{yy} \dot{\omega}_y + (I_{xx} - I_{zz}) \omega_z \omega_x = u_3, \quad (15)$$

$$I_{zz} \dot{\omega}_z = u_4, \quad (16)$$

where

$$\boldsymbol{\tau} = \begin{bmatrix} 0 \\ 0 \\ u_1 \\ u_2 \\ u_3 \\ u_4 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ F_1 + F_2 + F_3 + F_4 \\ (-F_2 + F_4)l \\ (-F_1 + F_3)l \\ (-F_1 + F_2 - F_3 + F_4)\lambda \end{bmatrix}, \quad (17)$$

and l is the distance between the motor and the center of mass.

Equation 17 can be rewritten as the form of matrix like below:

$$\begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 0 & -l & 0 & l \\ -l & 0 & l & 0 \\ -\lambda & \lambda & -\lambda & \lambda \end{bmatrix} \begin{bmatrix} F_1 \\ F_2 \\ F_3 \\ F_4 \end{bmatrix} = \mathbf{T} \begin{bmatrix} F_1 \\ F_2 \\ F_3 \\ F_4 \end{bmatrix}. \quad (18)$$

2.2 Earth-Fixed Vector Representation

Until now, we derive the dynamic equation of motion related to the body fixed coordinate frame. However, for the control purpose, it is more convenient to use the dynamic equations derived in earth-fixed coordinate frame like below:

$$\mathbf{M}_\eta(\boldsymbol{\eta})\ddot{\boldsymbol{\eta}} + \mathbf{C}_\eta(\mathbf{v}, \boldsymbol{\eta})\dot{\boldsymbol{\eta}} + \mathbf{g}_\eta(\boldsymbol{\eta}) = \boldsymbol{\tau}_\eta(\boldsymbol{\eta}). \quad (19)$$

To express the dynamic equations in earth-fixed coordinate frame like Eq. 19, we need following relationship

$$\begin{aligned} \dot{\boldsymbol{\eta}} &= \mathbf{J}(\boldsymbol{\eta})\mathbf{v} && \iff \mathbf{v} = \mathbf{J}^{-1}(\boldsymbol{\eta})\dot{\boldsymbol{\eta}} \\ \ddot{\boldsymbol{\eta}} &= \mathbf{J}(\boldsymbol{\eta})\dot{\mathbf{v}} + \dot{\mathbf{J}}(\boldsymbol{\eta})\mathbf{v} && \iff \dot{\mathbf{v}} = \mathbf{J}^{-1}(\boldsymbol{\eta})[\ddot{\boldsymbol{\eta}} - \dot{\mathbf{J}}(\boldsymbol{\eta})\mathbf{v}] \end{aligned} \quad (20)$$

Then, the system matrices are defined as below:

$$\begin{aligned}\mathbf{M}_\eta(\eta) &= \mathbf{J}^{-T}(\eta)\mathbf{M}\mathbf{J}^{-1}(\eta) \\ \mathbf{C}_\eta(\mathbf{v}, \eta) &= \frac{1}{2}\dot{\mathbf{M}}_\eta(\eta) \\ \mathbf{g}_\eta(\eta) &= \mathbf{J}^{-T}(\eta)\mathbf{g}(\eta) \\ \boldsymbol{\tau}_\eta(\eta) &= \mathbf{J}^{-T}(\eta)\boldsymbol{\tau}\end{aligned}\quad (21)$$

Finally, we can derive the equations of motion in earth-fixed coordinate frame.

$$m\ddot{x} = (s\psi s\phi + c\psi c\phi s\theta)u_1 \quad (22)$$

$$m\ddot{y} = (-c\psi s\phi + s\theta s\psi c\phi)u_1 \quad (23)$$

$$m(\ddot{z} + g) = c\theta c\phi u_1 \quad (24)$$

$$\mathbf{M}_{\eta_2}\ddot{\eta}_2 + \frac{1}{2}\dot{\mathbf{M}}_{\eta_2}\dot{\eta}_2 = \begin{bmatrix} u_2 \\ u_3 c\phi - u_4 s\phi \\ -u_2 s\theta + u_3 c\theta s\phi + u_4 c\theta c\phi \end{bmatrix} \quad (25)$$

where

$$\mathbf{M}_{\eta_2} = \begin{bmatrix} I_{xx} & 0 & -I_{xx}s\theta \\ 0 & I_{yy}c^2\phi + I_{zz}s^2\phi & (I_{yy} - I_{zz})c\phi c\theta s\phi \\ -I_{xx}s\theta & (I_{yy} - I_{zz})c\phi c\theta s\phi & I_{xx}s^2\theta + I_{yy}c^2\theta s^2\phi + I_{zz}c^2\theta c^2\phi \end{bmatrix}. \quad (26)$$

2.3 Equations of Motion of a QRT UAV

As shown in previous subsections, the linear equations of motion of a QRT UAV are simple in earth-fixed reference frame, while the angular equations are advantageous to express in body-fixed reference frame. According to the above analysis, finally, the following equations are derived.

$$\begin{cases} m\ddot{x} = (s\psi s\phi + c\psi c\phi s\theta)u_1 \\ m\ddot{y} = (-c\psi s\phi + s\theta s\psi c\phi)u_1 \\ m(\ddot{z} + g) = c\theta c\phi u_1 \\ I_{xx}\dot{\omega}_x + (I_{zz} - I_{yy})\omega_y\omega_z = u_2, \\ I_{yy}\dot{\omega}_y + (I_{xx} - I_{zz})\omega_z\omega_x = u_3, \\ I_{zz}\dot{\omega}_z = u_4. \end{cases} \quad (27)$$

As shown in the Eq. 27, for the linear motions, all the states are subordinated to the control parameter u_1 , hence only one state is controllable and the others are subjected to the controlled linear motion and angular motions. In this paper, for the hovering control, we only consider and control the z -directional linear motions.

Especially, the hovering control with $\phi \approx 0$ and $\theta \approx 0$ can make the dynamics much simpler form like Eq. 28, and it is easy to design the controller.

$$\begin{aligned}m(\ddot{z} + g) &= u_1 \\ I_{xx}\ddot{\phi} &= u_2 - (I_{zz} - I_{yy})\dot{\theta}\dot{\psi}, \\ I_{yy}\ddot{\theta} &= u_3 - (I_{xx} - I_{zz})\dot{\psi}\dot{\phi}, \\ I_{zz}\ddot{\psi} &= u_4.\end{aligned}\quad (28)$$

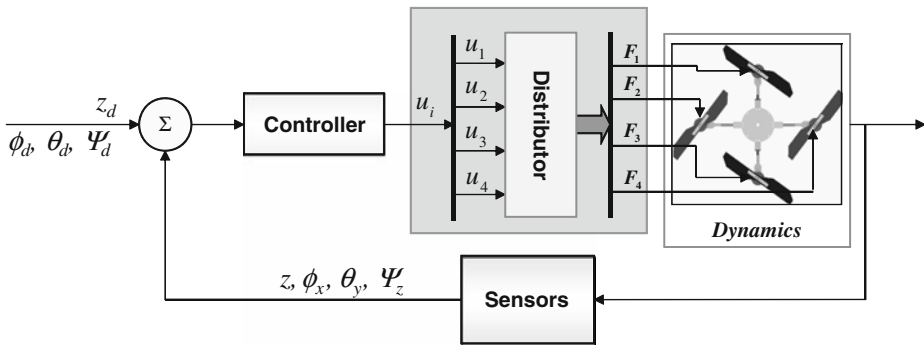


Fig. 3 Basic structure of the controller for the UAV

To satisfy the conditions where Eq. 28 is valid, ϕ and θ have to stay near the neutral positions, which are zeros. So, for the following section, the robust controller based on the disturbance observer for a QRT UAV is proposed.

3 Controller Design

Figure 3 shows the basic structure for the flight control of the UAV.

Now, let us consider following composite dynamic equations of motion.

$$\begin{bmatrix} m(\ddot{z} + g) \\ I_{xx}\ddot{\phi} \\ I_{yy}\ddot{\theta} \\ I_{zz}\ddot{\psi} \end{bmatrix} + \Delta = \begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{bmatrix}, \quad (29)$$


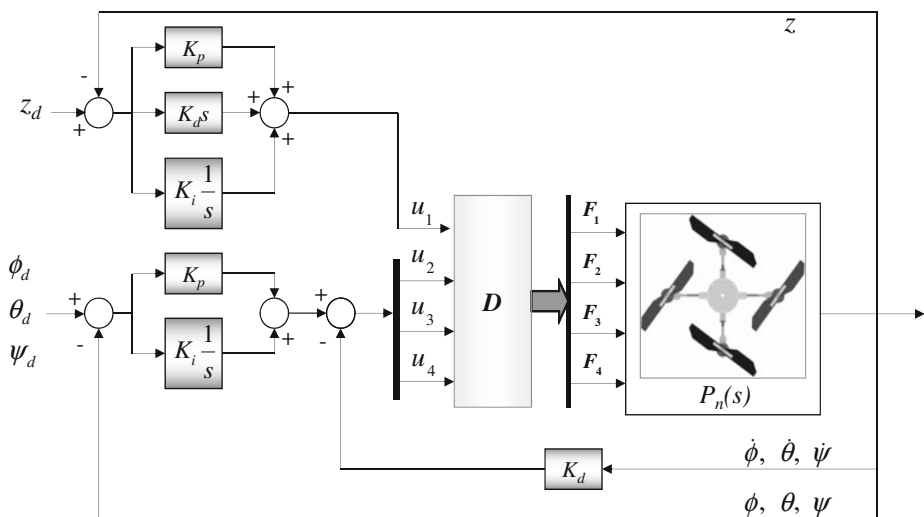


Fig. 4 PID controller for controlling the altitude and attitude of a QRT UAV

Fig. 5 Disturbance observer

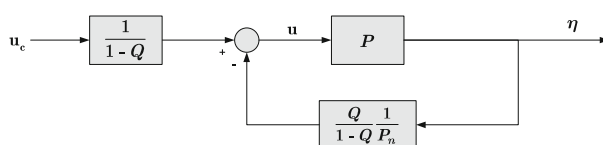

where the disturbance, Δ , is defined as

$$\Delta = \begin{bmatrix} \delta_3 \\ \delta_4 + (I_{zz} - I_{yy})\omega_y\omega_z \\ \delta_5 + (I_{xx} - I_{zz})\omega_z\omega_x \\ \delta_6 \end{bmatrix}. \quad (30)$$

Fig. 6 The developed QRT Unmanned aerial vehicles.: **a** version 1; and, **b** version 2

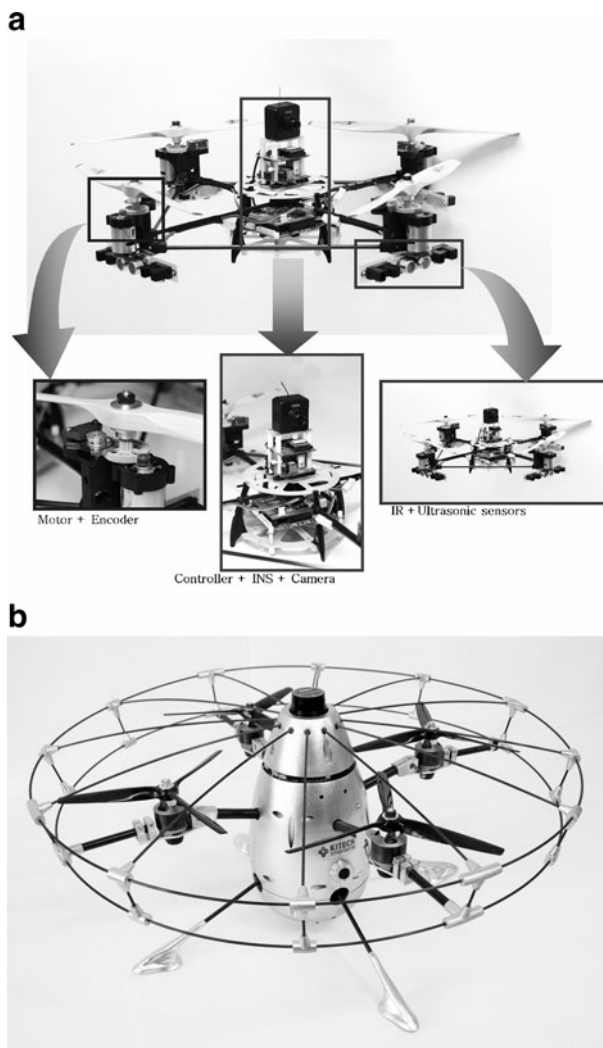


Table 1 The specification and parameters of the QRT UAV version 2

Description	Value
Weight	2.2 kg
Diameter	573.6 mm
Height	170 mm
Distance between the motor and the C.G	172.5 mm
Propeller	9" × 7"
Moment of inertia in x -axis, I_{xx}	16.76337 gm ²
Moment of inertia in y -axis, I_{yy}	16.76337 gm ²
Moment of inertia in z -axis, I_{zz}	23.1447 gm ²

And δ_i mainly comes from the dynamic inconsistency. For the hovering control, the amount of disturbance is relatively small. Hence, it does not give instability, but poor performance, which may violate the assumption, $\phi \approx 0$ and $\theta \approx 0$. This phenomenon can be resolved using DOB control input.

3.1 Basic Controller

The control algorithms for the altitude and attitude, roll, pitch and yaw, of the UAV are designed based on PID controllers as shown in Fig. 4. The control input u_1 for controlling the altitude z of the UAV with respect to the reference input z_d is designed as

$$u_1 = K_{p1}(z_d - z) + K_{d1} \frac{d(z_d - z)}{dt} + K_{I1} \int_0^t (z_d - z) d\tau. \quad (31)$$

The control inputs u_j ($j = 2, 3, 4$) for controlling the attitude (ϕ, θ, ψ) of the UAV with respect to the reference inputs $(\phi, \theta, \psi)_d$ are designed, respectively given as:

$$u_j = K_{pj}[(\phi, \theta, \psi)_d - (\phi, \theta, \psi)] - K_{dj}(\dot{\phi}, \dot{\theta}, \dot{\psi}) + K_{I1} \int_0^t [(\phi, \theta, \psi)_d - (\phi, \theta, \psi)] d\tau - \bar{u}_j. \quad (32)$$


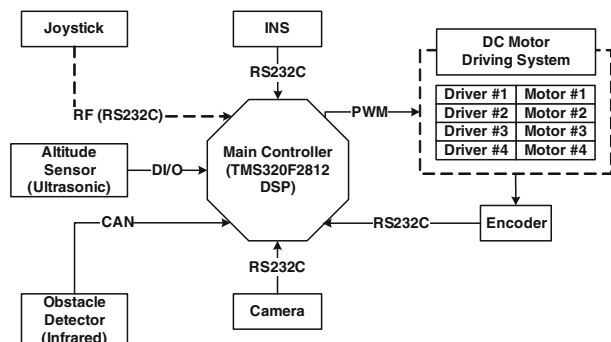
Fig. 7 Schematic view of the embedded controller

Fig. 8 The scheme of the vision based localization

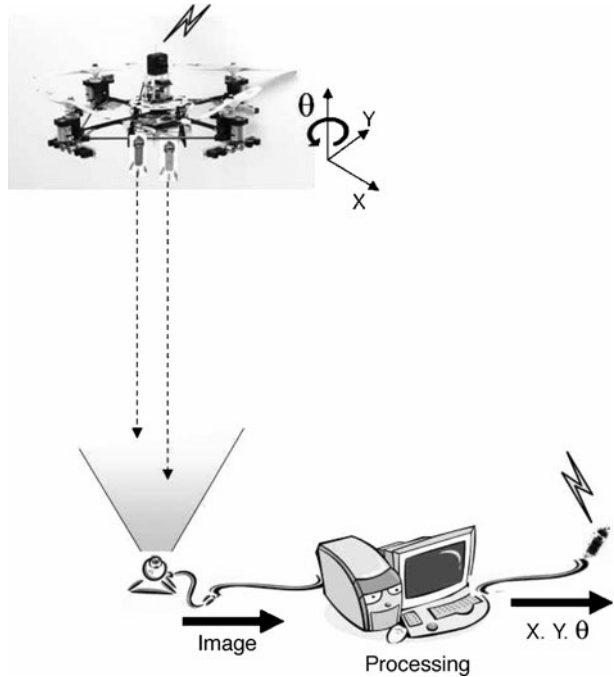

$\bar{u}_j$ are the PD control inputs for avoiding obstacles in roll and pitch axis given as:

$$\begin{aligned}\bar{u}_2 &= [K_{pr}(d_{rd} - d_r) - K_{dr}\dot{d}_r]U(d_{rd} - d_r) - [K_{pl}(d_{ld} - d_l) - K_{dl}\dot{d}_l]U(d_{ld} - d_l) \\ \bar{u}_3 &= [K_{pb}(d_{bd} - d_b) - K_{db}\dot{d}_b]U(d_{bd} - d_b) - [K_{pf}(d_{fd} - d_f) - K_{df}\dot{d}_f]U(d_{fd} - d_f) \\ \bar{u}_4 &= 0\end{aligned}\quad (33)$$

Fig. 9 The result of the vision based localization


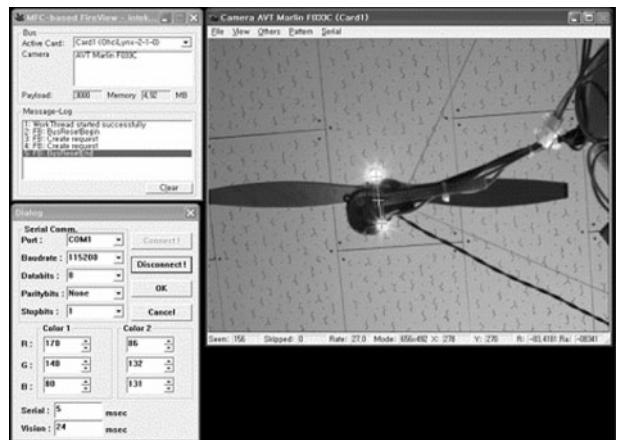


Fig. 10 Experiments of the QRT Unmanned aerial vehicle

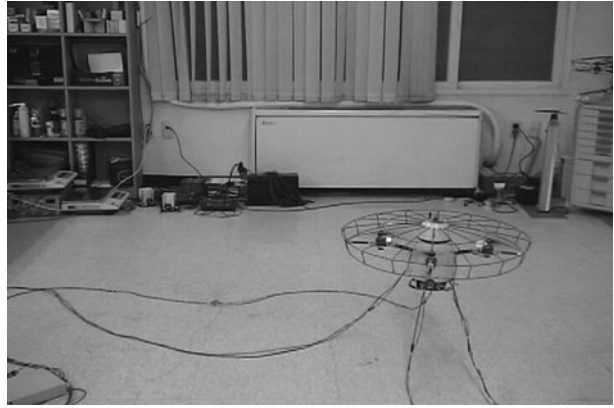

where d_{md} ($m = f, b, l, r$) are reference distances for avoiding obstacles to forward, backward, left, and right direction, and d_m ($m = f, b, l, r$) are distances of obstacles to the four direction. $U(d_{md} - d_m)$ ($m = f, b, l, r$) are step functions as follows:

$$U(d_{md} - d_m) = \begin{cases} 1, & \text{for } d_{md} < d_m \\ 0, & \text{for } d_{md} > d_m \end{cases} \quad (m = f, b, l, r) \quad (34)$$

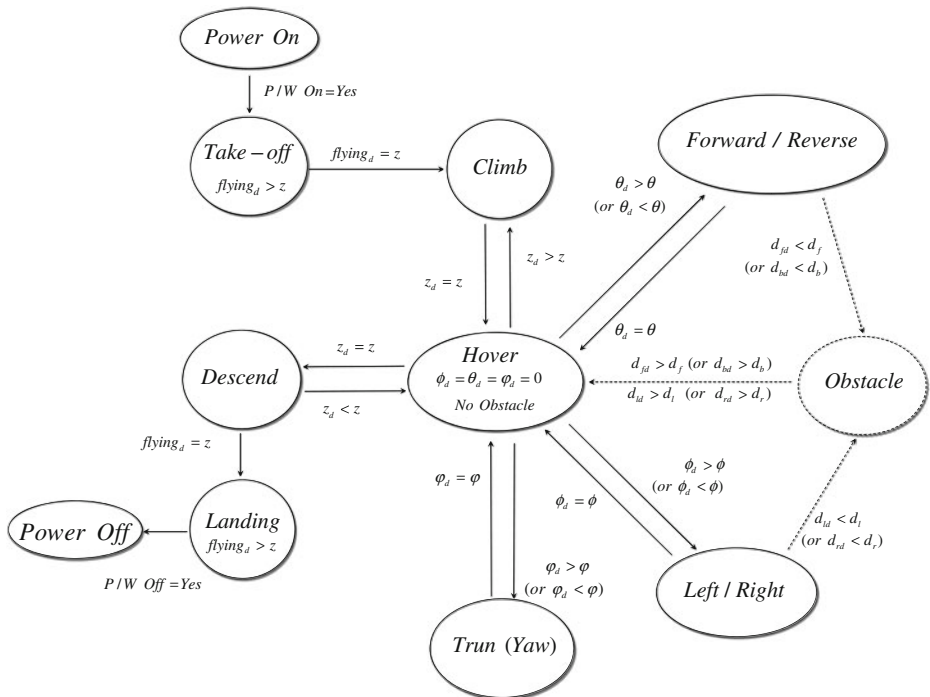


Fig. 11 The control flow of flying robot system

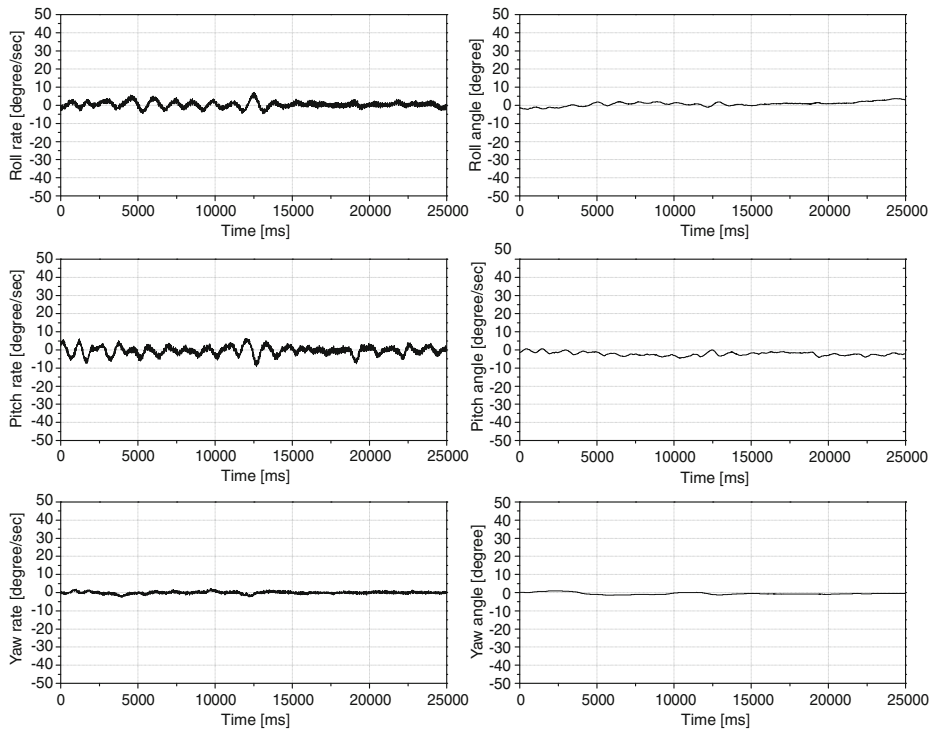


Fig. 12 Experimental results for hovering and attitude control of the developed UAV: hovering of the UAV

3.2 Disturbance Observer Based Disturbance Compensation

The control algorithms Eqs. 31 and 32 control the altitude and attitude of the UAV using sensor signals. The flight performance of the UAV, however, is not good in real flight because of the sensor noises and disturbances. The DOB based control algorithm, as shown in Fig. 5, controls the response of the plant $P(s)$ to follow that of the model plant $P_n(s)$ even though disturbances, sensor noise, and modeling uncertainty are applied to the plant.

Figure 5 shows the block diagram of disturbance observer. It can be expressed as

$$u(s) = \frac{1}{1-Q} u_c(s) - \frac{Q}{1-Q} \frac{1}{P_n} \eta(s). \quad (35)$$

DOB based disturbance compensator can be used to both for altitude and attitude control in the same way. In the cases the nominal models are given in the form of force-mass and inertia-moment dynamic models without friction, respectively given as $P_n = \frac{1}{ms^2}$ for the linear motion, and $P_n = \frac{1}{I_{xx,yy,zz}s^2}$ for the angular motion. And, for the Q -filter, we use well-known Q_{31} filter as following:

$$Q_{31}(s) = \frac{1 + 3\tau s}{(1 + \tau s)^3}, \quad (36)$$

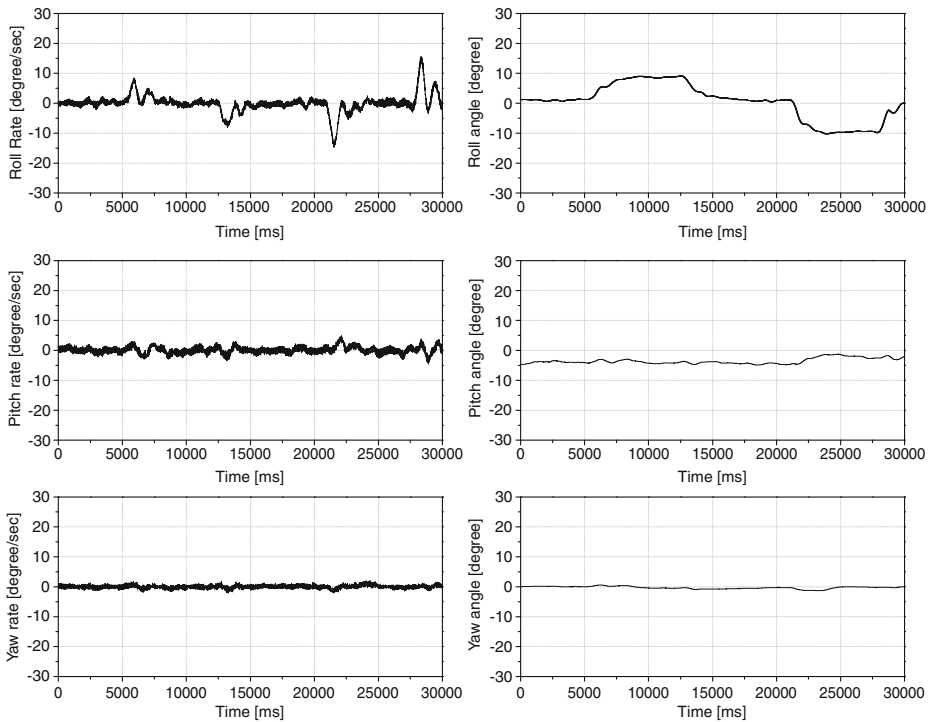


Fig. 13 Experimental results for hovering and attitude control of the developed UAV: desired roll angle of the UAV = $\pm 10^\circ$

Then, the internal loop will be conducted as

$$\begin{bmatrix} m(\ddot{z} + g) \\ I_x \ddot{\phi} \\ I_y \ddot{\theta} \\ I_z \ddot{\psi} \end{bmatrix} = \begin{bmatrix} u_{c1} \\ u_{c2} \\ u_{c3} \\ u_{c4} \end{bmatrix}. \quad (37)$$

Using Eq. 37, we can easily design the linear controller for each axis independently.

4 Experimental Results

4.1 Experimental Setup

Figure 6 shows the fabricated QRT UAVs for the purpose of calamity observation in indoor environment. The UAVs have 4 rigid blades driven by each BLDC motor mounted at each end of a crossing body frame. The Encoders for measuring speed are mounted on the motors. The UAVs are also equipped with an IMU(Inertial Measurement Unit) composed of three rate gyros for sensing attitude, eight IRs and four ultrasonic range sensors for obstacle detection, and one additional ultrasonic sensor for altitude measuring. A CCD camera with wireless RF(Radio Frequency) transmitter is mounted on the top of the UAV for the observation task. Table 1 gives

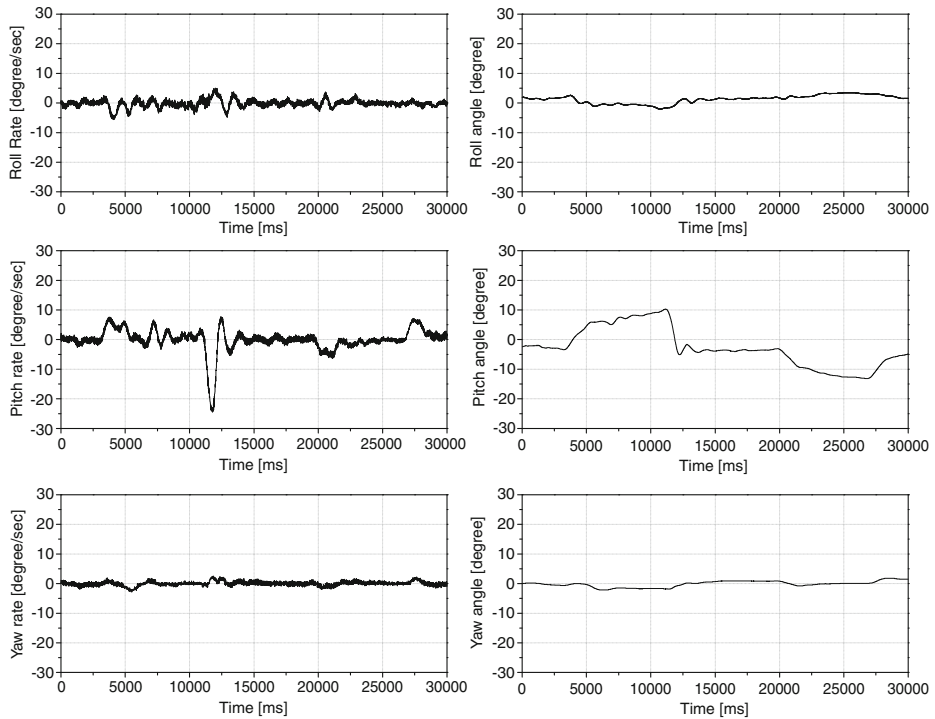


Fig. 14 Experimental results for hovering and attitude control of the developed UAV: desired pitch angle of the UAV = $\pm 10^\circ$

the specification of the developed UAV. Figure 7 shows the schematic view of the embedded controller using a TMS320F2812 DSP controller.

4.2 Vision Based Localization

Figure 8 shows the scheme of the vision based localization. As the payload of the UAV is limited, red and green LED markers are attached at the bottom of the UAV, and a CCD camera is put on the ground. The CCD camera gets the image of the LED markers, and the image processor analyzes the color distribution of the markers, extract the center of each marker and finds the position and orientation of the markers as shown in Fig. 9 [19]. It takes 25ms for the image processing, and 5ms for serial communication.

4.3 Experiments and Results

Figure 10 shows the experiments of the hovering control of the QRT UAV.

Figure 11 shows the control flow of flying robot system. If detecting obstacles, the flying robot system avoids the obstacles by moving in the opposite direction. All flying movements except for takeoff states start on the hovering state, and if a certain movement is finished, it will be come back into the hovering state again.


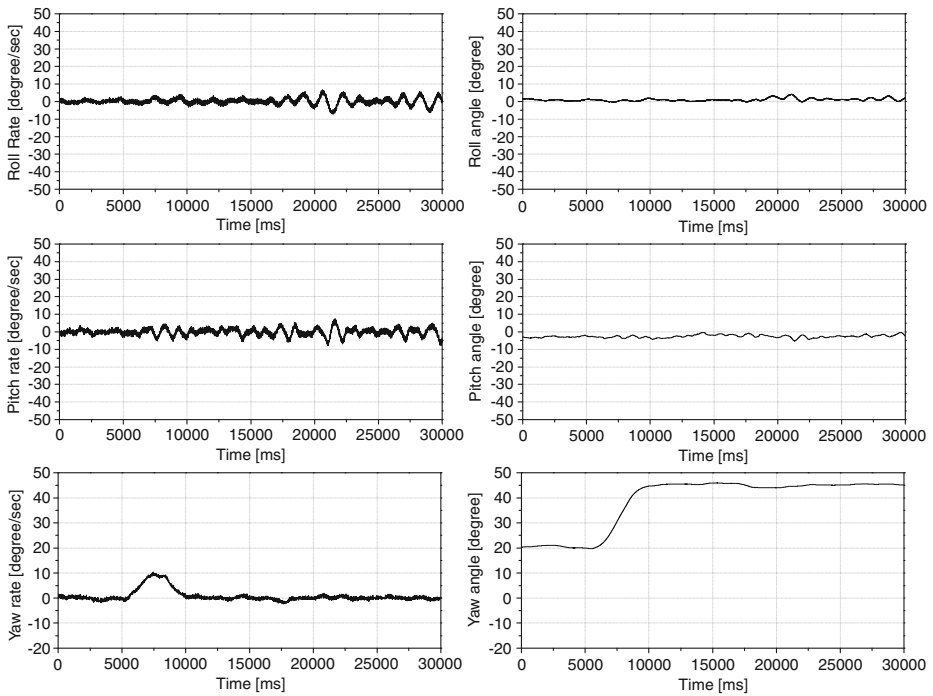


Fig. 15 Experimental results for hovering and attitude control of the developed UAV: desired yaw angle of the UAV = $+45^\circ$

Figures 12, 13, 14, 15, 16 show the experimental results for hovering performance using attitude and altitude control. The left column of Fig. 12 shows roll, pitch, and yaw rates (up to down) and the right column shows roll, pitch, and yaw angles during hovering. Figures 13–15 show three angle rates and angles for pitch, roll, and yaw controls. As shown in the Fig. 16, the performance of the altitude control is very satisfactory, even though the sonar sensor is used. The results show that the proposed algorithm for both the altitude and attitude control of the UAV works well.

Fig. 16 Experimental results for hovering and altitude control of the developed UAV

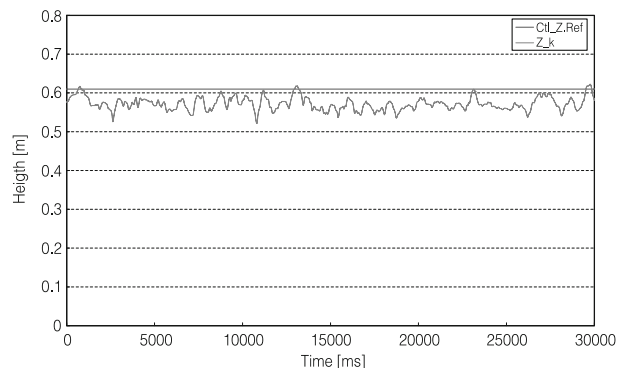

For the hovering control, in this paper, a DOB controller with PID is proposed. With DOB, we can derive the linear equation, Eq. 37 using internal loop compensator, Eq. 36. As depicted in Fig. 4, a PID controller is used for the altitude and attitude of QRT UAVs. For the yaw controller, the I-gain is set to 0, because of the sensor noise. Normally the electrical compass is used for sensing the yaw motion, but the electrical compass is easily affected from other electrical systems, e.g., motor and battery.

5 Conclusion

In this study, a QRT UAV is developed for calamity observation in indoor environments. The hovering robot captures the image of targets under harmful environments, and sends the image to the operator on the safe site. The rigorous dynamic models of a QRT UAV were obtained both in the reference and body frame coordinate systems using the quasi-Lagrange equation. In many previous researches, they misused two subset motions as the whole body dynamics, however, at that case, the states of the whole body dynamics cannot be decoupled. A disturbance observer (DOB) based controller using the derived dynamic models was also proposed for hovering control and the vision based localization method. The control input induced by DOB will be helpful to use simple equations of motion satisfying the accurate derived dynamics. In addition, the UAV can also avoid obstacles using eight IR and four ultrasonic range sensors. The experiments were carried out to show the validity of the proposed control algorithm. The results show the attitude and height control results are very stable.

References

1. Mistler, V., Benallegue, A., M'Sirdi, N.: Exact linearization and noninteracting control of a 4 rotors helicopter via dynamic feedback. In: *Proceedings of IEEE Intrnational Workshop on Robot and Human Interactive Communication*, pp. 586–593 (2001)
2. McKerrow, P.: Modeling the draganflyer for-rotor helicopter. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 3596–3601 (2004)
3. Mokhtari, A., Benallegue, A.: Dynamic feedback controller of euler angles and wind parameters estimation for a quadrotor unmmanned aerial vehicle. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 2359–2366 (2004)
4. Castillo, P., Lozano, R., Dzul, A.: Stabilization of a mini-rotorcraft having four rotors. In: *Proc., IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*, pp. 2693–2698 (2004)
5. Bouabdallah, S., Murrieri, P., Siegwart, R.: Design and control of an indoor micro quadrotor. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 4393–4398 (2004)
6. Bouabdallah, S., Siegwart, R.: Backstepping and sliding-mode techniques applied to an indoor micro quadrotor. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 2259–2264 (2005)
7. Altuğ, E., Ostrowski, J., Mahony, R.: Control of a quadrotor helicopter using visual feedback. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 72–77 (2002)
8. Hamel, T., Mahony, R., Chiette, A.: Visual servo trajectory tracking for a four rotor vtol aerial vehicle. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 2781–2786 (2002)
9. Hamel, T., Mahony, R.: Pure 2d visual servo control for a class of under-actuated dynamic system. In: *Proc., IEEE Int. Conf. on Robotics and Automation*, pp. 2229–2235 (2004)
10. Castillo, P., Dzul, A., Lozano, R.: Real-time stabilization and tracking of a four-rotor mini rotorcraft. *IEEE Trans. Control Syst. Technol.* **12**(4), 510–516 (2004)
11. Guenard, N., Hamel, T., Moreau, V.: Dynamic modeling and intuitive control strategy for an x4-flyer. In: *Proc. International Conf. on Control and Automation*, pp. 141–146 (2005)