

Wave Propagation in Fluids

Models and Numerical Techniques

Second Edition

Vincent Guinot

ISTE

 WILEY

Wave Propagation in Fluids

Wave Propagation in Fluids

Models and Numerical Techniques

Second Edition

Vincent Guinot

ISTE

 WILEY

First edition published 2008 by ISTE Ltd and John Wiley & Sons, Inc.
Second updated and revised edition published 2010 in Great Britain and the United States by ISTE Ltd and John Wiley & Sons, Inc.

Apart from any fair dealing for the purposes of research or private study, or criticism or review, as permitted under the Copyright, Designs and Patents Act 1988, this publication may only be reproduced, stored or transmitted, in any form or by any means, with the prior permission in writing of the publishers, or in the case of reprographic reproduction in accordance with the terms and licenses issued by the CLA. Enquiries concerning reproduction outside these terms should be sent to the publishers at the undermentioned address:

ISTE Ltd
27-37 St George's Road
London SW19 4EU
UK

www.iste.co.uk

John Wiley & Sons, Inc.
111 River Street
Hoboken, NJ 07030
USA

www.wiley.com

© ISTE Ltd 2008, 2010

The rights of Vincent Guinot to be identified as the author of this work have been asserted by him in accordance with the Copyright, Designs and Patents Act 1988.

Library of Congress Cataloging-in-Publication Data

Guinot, Vincent.

Wave propagation in fluids : models and numerical techniques / Vincent Guinot. -- 2nd ed., updated and rev.

p. cm.

Includes bibliographical references and index.

ISBN 978-1-84821-213-8

1. Fluids--Mathematics. 2. Wave-motion, Theory of. I. Title.

QA927.G85 2010

532'.05930151--dc22

2010027124

British Library Cataloguing-in-Publication Data

A CIP record for this book is available from the British Library

ISBN 978-1-84821-213-8

Printed and bound in Great Britain by CPI Antony Rowe, Chippenham and Eastbourne.



Table of Contents

Introduction	xv
Chapter 1. Scalar Hyperbolic Conservation Laws in One Dimension of Space	1
1.1. Definitions	1
1.1.1. Hyperbolic scalar conservation laws	1
1.1.2. Derivation from general conservation principles	3
1.1.3. Non-conservation form	6
1.1.4. Characteristic form – Riemann invariants	7
1.2. Determination of the solution	9
1.2.1. Representation in the phase space	9
1.2.2. Initial conditions, boundary conditions	12
1.3. A linear law: the advection equation	14
1.3.1. Physical context – conservation form	14
1.3.2. Characteristic form	16
1.3.3. Example: movement of a contaminant in a river	17
1.3.4. Summary	21
1.4. A convex law: the inviscid Burgers equation	21
1.4.1. Physical context – conservation form	21
1.4.2. Characteristic form	22
1.4.3. Example: propagation of a perturbation in a fluid	24
1.4.4. Summary	28
1.5. Another convex law: the kinematic wave for free-surface hydraulics	28
1.5.1. Physical context – conservation form	28
1.5.2. Non-conservation and characteristic forms	30
1.5.3. Expression of the wave speed	31
1.5.4. Particular case: flow in a rectangular channel	34

1.5.5. Summary	35
1.6. A non-convex conservation law: the Buckley-Leverett equation	35
1.6.1. Physical context – conservation form	35
1.6.2. Characteristic form	38
1.6.3. Example: decontamination of an aquifer	40
1.6.4. Summary	41
1.7. Advection with adsorption/desorption	42
1.7.1. Physical context – conservation form	42
1.7.2. Characteristic form	45
1.7.3. Summary	47
1.8. Summary of Chapter 1	47
1.8.1. What you should remember	47
1.8.2. Application exercises	48
Chapter 2. Hyperbolic Systems of Conservation Laws in One Dimension of Space	53
2.1. Definitions	53
2.1.1. Hyperbolic systems of conservation laws.	53
2.1.2. Hyperbolic systems of conservation laws – examples	55
2.1.3. Characteristic form – Riemann invariants	57
2.2. Determination of the solution	59
2.2.1. Domain of influence, domain of dependence	59
2.2.2. Existence and uniqueness of solutions – initial and boundary conditions	61
2.3. A particular case: compressible flows	63
2.3.1. Definition	63
2.3.2. Conservation form	63
2.3.3. Characteristic form	66
2.3.4. Physical interpretation	67
2.4. A linear 2×2 system: the water hammer equations.	68
2.4.1. Physical context – assumptions.	68
2.4.2. Conservation form	70
2.4.3. Characteristic form – Riemann invariants	75
2.4.4. Calculation of the solution	79
2.4.5. Summary	83
2.5. A nonlinear 2×2 system: the Saint Venant equations	84
2.5.1. Physical context – assumptions.	84
2.5.2. Conservation form	85
2.5.3. Characteristic form – Riemann invariants	91
2.5.4. Calculation of solutions	100
2.5.5. Summary	107

2.6. A nonlinear 3×3 system: the Euler equations	108
2.6.1. Physical context – assumptions.	108
2.6.2. Conservation form	109
2.6.3. Characteristic form – Riemann invariants	113
2.6.4. Calculation of the solution	117
2.6.5. Summary.	121
2.7. Summary of Chapter 2	122
2.7.1. What you should remember.	122
2.7.2. Application exercises	123
Chapter 3. Weak Solutions and their Properties	131
3.1. Appearance of discontinuous solutions	131
3.1.1. Governing mechanisms	131
3.1.2. Local invalidity of the characteristic formulation – graphical approach	134
3.1.3. Practical examples of discontinuous flows	136
3.2. Classification of waves	138
3.2.1. Shock wave	138
3.2.2. Rarefaction wave	140
3.2.3. Contact discontinuity.	140
3.2.4. Mixed/compound wave	141
3.3. Simple waves.	142
3.3.1. Definition and properties	142
3.3.2. Generalized Riemann invariants	143
3.4. Weak solutions and their properties	144
3.4.1. Definitions	144
3.4.2. Non-equivalence between the formulations	145
3.4.3. Jump relationships	146
3.4.4. Non-uniqueness of weak solutions.	148
3.4.5. The entropy condition	152
3.4.6. Irreversibility	154
3.4.7. Approximations for the jump relationships.	156
3.5. Summary	157
3.5.1. What you should remember.	157
3.5.2. Application exercises	158
Chapter 4. The Riemann Problem	161
4.1. Definitions – solution properties	161
4.1.1. The Riemann problem	161
4.1.2. The generalized Riemann problem.	162
4.1.3. Solution properties	163

4.2. Solution for scalar conservation laws	165
4.2.1. The linear advection equation	165
4.2.2. The inviscid Burgers equation	166
4.2.3. The Buckley-Leverett equation.	168
4.3. Solution for hyperbolic systems of conservation laws.	173
4.3.1. General principle	173
4.3.2. Application to the water hammer problem: sudden valve failure . .	174
4.3.3. Free surface flow: the dambreak problem	177
4.3.4. The Euler equations: the shock tube problem	183
4.4. Summary	189
4.4.1. What you should remember.	189
4.4.2. Application exercises	190
Chapter 5. Multidimensional Hyperbolic Systems	193
5.1. Definitions	193
5.1.1. Scalar laws.	193
5.1.2. Two-dimensional hyperbolic systems	195
5.1.3. Three-dimensional hyperbolic systems	196
5.2. Derivation from conservation principles.	197
5.3. Solution properties	200
5.3.1. Two-dimensional hyperbolic systems	200
5.3.2. Three-dimensional hyperbolic systems	206
5.4. Application: the two-dimensional shallow water equations	208
5.4.1. Governing equations	208
5.4.2. The secant plane approach	213
5.4.3. Interpretation – determination of the solution	218
5.5. Summary	221
5.5.1. What you should remember.	221
5.5.2. Application exercises	221
Chapter 6. Finite Difference Methods for Hyperbolic Systems	223
6.1. Discretization of time and space	223
6.1.1. Discretization for one-dimensional problems	223
6.1.2. Multidimensional discretization	224
6.1.3. Explicit schemes, implicit schemes	226
6.2. The method of characteristics (MOC)	227
6.2.1. MOC for scalar hyperbolic laws	227
6.2.2. The MOC for hyperbolic systems of conservation laws	235
6.2.3. Application examples	240
6.3. Upwind schemes for scalar laws	244
6.3.1. The explicit upwind scheme (non-conservative version).	244
6.3.2. The implicit upwind scheme (non-conservative version)	245

6.3.3. Conservative versions of the implicit upwind scheme	247
6.3.4. Application examples	249
6.4. The Preissmann scheme	250
6.4.1. Formulation	250
6.4.2. Estimation of nonlinear terms – algorithmic aspects	253
6.4.3. Numerical applications	254
6.5. Centered schemes	260
6.5.1. The Crank-Nicholson scheme	260
6.5.2. Centered schemes with Runge-Kutta time stepping	261
6.6. TVD schemes	263
6.6.1. Definitions	263
6.6.2. General formulation of TVD schemes	264
6.6.3. Harten’s and Sweby’s criteria	266
6.6.4. Classical limiters	268
6.6.5. Computational example	269
6.7. The flux splitting technique	271
6.7.1. Principle of the approach	271
6.7.2. Application to classical schemes	274
6.8. Conservative discretizations: Roe’s matrix	280
6.8.1. Rationale and principle of the approach	280
6.8.2. Expression of Roe’s matrix	281
6.9. Multidimensional problems	284
6.9.1. Explicit alternate directions	284
6.9.2. The ADI method	286
6.9.3. Multidimensional schemes	288
6.10. Summary	289
6.10.1. What you should remember	289
6.10.2. Application exercises	291
Chapter 7. Finite Volume Methods for Hyperbolic Systems	293
7.1. Principle	293
7.1.1. One-dimensional conservation laws	293
7.1.2. Multidimensional conservation laws	295
7.1.3. Application to the two-dimensional shallow water equations	297
7.2. Godunov’s scheme	299
7.2.1. Principle	299
7.2.2. Application to the scalar advection equation	301
7.2.3. Application to the inviscid Burgers equation	305
7.2.4. Application to the water hammer equations	308
7.3. Higher-order Godunov-type schemes	313
7.3.1. Rationale and principle	313
7.3.2. Example: the MUSCL scheme	316

7.4. EVR approach	319
7.4.1. Principle of the approach	319
7.4.2. Application to the one-dimensional shallow water equations	323
7.5. Summary	326
7.5.1. What you should remember	326
7.5.2. Application exercises	327
Chapter 8. Finite Element Methods for Hyperbolic Systems	329
8.1. Principle for one-dimensional scalar laws	329
8.1.1. Weak form	329
8.1.2. Discretization of space and time	330
8.1.3. Classical shape and test functions	335
8.2. One-dimensional hyperbolic systems	340
8.2.1. Weak formulation.	340
8.2.2. Application to the non-conservation form	341
8.3. Extension to multidimensional problems	344
8.3.1. Weak form of the equations.	344
8.3.2. Discretization of space.	345
8.3.3. Classical shape and test functions	345
8.4. Discontinuous Galerkin techniques.	347
8.4.1. Principle of the method	347
8.4.2. Legendre polynomial-based reconstruction	349
8.4.3. Limiting	351
8.4.4. Runge-Kutta time stepping	353
8.5. Application examples	354
8.5.1. The linear advection equation	354
8.5.2. The inviscid Burgers equation	359
8.6. Summary	368
8.6.1. What you should remember.	368
8.6.2. Application exercises	369
Chapter 9. Treatment of Source Terms.	371
9.1. Introduction.	371
9.2. Problem position.	372
9.2.1. Example 1: the water hammer equations	372
9.2.2. Example 2: the shallow water equations	374
9.2.3. Stationary solution and C-property	376
9.3. Source term upwinding techniques	377
9.3.1. Principle	377
9.3.2. Application example 1: the water hammer equations.	380
9.3.3. Application example 2: the shallow water equations with HLL solver	382

9.4. The quasi-steady wave algorithm	386
9.4.1. Principle	386
9.4.2. Application to the water hammer equations	387
9.4.3. Application to the one-dimensional shallow water equations	387
9.5. Balancing techniques	390
9.5.1. Well-balancing	390
9.5.2. Hydrostatic pressure reconstruction for free surface flow	393
9.5.3. Auxiliary variable-based balancing	395
9.6. Computational example	403
9.7. Summary	408
Chapter 10. Sensitivity Equations for Hyperbolic Systems	411
10.1. Introduction	411
10.2. Forward sensitivity equations for scalar laws	413
10.2.1. Derivation for continuous solutions	413
10.2.2. Conservation, non-conservation and characteristic forms	415
10.2.3. Extension to discontinuous solutions	416
10.2.4. Solution of the Riemann problem	418
10.3. Forward sensitivity equations for hyperbolic systems	422
10.3.1. Governing equations	422
10.3.2. Non-conservation and characteristic forms	424
10.3.3. The Riemann problem	426
10.3.4. Application example: the one-dimensional shallow water sensitivity equations	427
10.4. Adjoint sensitivity equations	435
10.4.1. Introduction	435
10.4.2. Adjoint models for scalar laws	435
10.5. Finite volume solution of the forward sensitivity equations	441
10.5.1. Introduction	441
10.5.2. Discretization	442
10.5.3. A modified HLL Riemann solver for sensitivity solutions	443
10.5.4. Application example: the one-dimensional shallow water equations	446
10.6. Summary	447
Chapter 11. Modeling in Practice	449
11.1. Modeling software	449
11.1.1. Introduction	449
11.1.2. Conservation	450
11.1.3. Solution monotony	453
11.2. Mesh quality	454
11.3. Boundary conditions	459

11.3.1. Number and nature of boundary conditions	459
11.3.2. Prescribed discharge/flow velocity	460
11.3.3. Prescribed pressure/water level	461
11.3.4. Stage-discharge and pressure-discharge relationships	463
11.4. Numerical parameters	464
11.4.1. Computational time step	464
11.4.2. Scheme centering parameters	465
11.4.3. Iteration control	465
11.5. Simplifications in the governing equations	466
11.5.1. Rationale	466
11.5.2. The Local Partial Inertia (LPI) technique	467
11.5.3. The Reduced Momentum Equation (RME) technique	468
11.5.4. Application examples	469
11.6. Numerical solution assessment	472
11.6.1. Software solution accuracy	472
11.6.2. Assessing solution convergence	473
11.6.3. Consistency analysis – numerical diffusion and dispersion	474
11.6.4. Stability analysis – phase and amplitude portraits	476
11.7. Getting started with a simulation package	477
Appendix A. Linear Algebra	479
A.1. Definitions	479
A.2. Operations on matrices and vectors	480
A.2.1. Addition	480
A.2.2. Multiplication by a scalar	481
A.2.3. Matrix product	481
A.2.4. Determinant of a matrix	482
A.2.5. Inverse of a matrix	482
A.3. Differential operations using matrices and vectors	483
A.3.1. Differentiation	483
A.3.2. Jacobian matrix	483
A.4. Eigenvalues, eigenvectors	483
A.4.1. Definitions	483
A.4.2. Example	484
Appendix B. Numerical Analysis	487
B.1. Consistency	487
B.1.1. Definitions	487
B.1.2. Principle of a consistency analysis	487
B.1.3. Numerical diffusion, numerical dispersion	489
B.2. Stability	491
B.2.1. Definition	491

B.2.2. Principle of a stability analysis	492
B.2.3. Harmonic analysis of analytical solutions	494
B.2.4. Harmonic analysis of numerical solutions	497
B.2.5. Amplitude and phase portraits	499
B.2.6. Extension to systems of equations	501
B.3. Convergence	503
B.3.1. Definition	503
B.3.2. Lax's theorem	503
Appendix C. Approximate Riemann Solvers	505
C.1. The HLL and HLLC solvers	505
C.1.1. The HLL solver	505
C.1.2. The HLLC solver	508
C.2. Roe's solver	511
C.2.1. Principle	511
C.2.2. Algorithmic simplification	513
C.2.3. Entropy violation and fixes	514
C.2.4. Application example: the shallow water equations	514
C.3. The Lax-Friedrichs solver	515
C.4. Approximate-state solvers	516
C.4.1. Principle	516
C.4.2. Shock-based solvers	516
C.4.3. Rarefaction wave-based solvers	517
Appendix D. Summary of the Formulae	521
Bibliography	527
Index	537

Introduction

What is wave propagation?

In a kitchen or in a bathroom, the number of times we turn a tap every day is countless. So is the number of times we watch the liquid stream impacting the sink. The circular flow pattern where the fast and shallow water film diverging from the impact point changes into a deeper, bubbling flow is too familiar to deserve attention. Very few people looking at the circular, bubbling pattern – referred to as a hydraulic jump by hydraulics specialists – are aware that they are contemplating a shock wave.

Closing the tap too quickly may result in a thud sound. This is the audible manifestation of the well-known water hammer phenomenon, a train of pressure waves propagating in the metal pipes as fast as hundreds or thousands of meters per second. The water hammer phenomenon is known to cause considerable damage to hydropower duct systems or water supply networks under the sudden operation of valves, pumps or turbines. The sound is heard because the vibrations of the duct system communicate with the ambient atmosphere, and from there with the operator's ears.

Everyone has once thrown stones into a pond, watching the concentric ripples propagate on the surface. Less visible and much slower than the ripples is the moving groundwater that displaces a pollutant front in a journey that may last for years.

As ubiquitous and familiar as wave propagation may be, the phenomenon is often poorly understood. The reason why intuition so often fails to grasp the mechanisms of wave propagation may lie in the commonly shared, instinctive perception that waves are made of matter. This, however, is not true. In the example of the hydraulic jump in the sink, the water molecules move across an immobile

wave. In the example of the ripples propagating on the free surface of a pond, the waves travel while the water remains immobile.

Waves appear when an object or a system (e.g. the molecules in a fluid, a rigid metallic structure) reacts to a perturbation and transmits it to its neighbors. In many cases, as in the example of the water ripples, the initially perturbed system returns to its initial equilibrium state, while the waves keep propagating. In this respect, waves may be seen as information. The ripples propagating in a pond are a sign that the water molecules “inform” their neighbors that the equilibrium state has been perturbed. A sound is nothing other than information about a perturbation occurring in the atmosphere.

Numerical techniques for wave propagation simulation have been the subject of intensive research over the last 50 years. The advent of fast computers has led to the development of efficient numerical techniques. Engineers and consultants now use simulation software packages for wave propagation on a daily basis. Whether for the purpose of acoustics, aerodynamics, flood wave propagation or contaminant transport studies, computer-based simulation tools have become indispensable to almost all domains of engineering. Such tools, however, remain instruments operated by human beings to execute tedious, repetitive operations previously carried out by hand. They cannot, and hopefully never will, replace the expert’s judgment and experience. Human presence remains necessary for the sound assessment of the relevance and accuracy of modeling results. Such an assessment, however, is possible only provided that the very specific type of reasoning required for the correct understanding of wave propagation phenomena has been acquired.

The main purpose of this book is to contribute to a better understanding of wave propagation phenomena and the most commonly used numerical techniques for its simulation. The first three chapters deal with the physics and mathematics of wave propagation. Chapters 4, 5 and 10 provide insight into more theoretical notions, used in specific numerical techniques. Chapters 6 to 9 are devoted to finite difference, finite volume and finite element techniques. Chapter 11 is devoted to practical advice for the modeler. Basic notions of linear algebra and numerical methods are presented in Appendices A to C. The various formulae used in the present book are summarized in Appendix D.

What is the intended readership of this book?

This book is intended for students of professional and research master’s programs and those engaged in doctoral studies, the curriculum of which contains hydraulics and/or fluid mechanics-related subjects. Engineers and developers in the

field of fluid mechanics and hydraulics are also a potential target group. This book was written with the following objectives:

(i) To introduce the physics of wave propagation, the governing assumptions and the derivation of the governing equations (in other words, the modeling process) in various domains of fluid mechanics. The application fields are as diverse as contaminant transport, open channel and free surface hydraulics, or aerodynamics.

(ii) To explain how the behavior of the physical systems can be analyzed using very simple mathematical techniques, thus allowing practical problems to be solved.

(iii) To introduce the main families of numerical techniques used in most simulation software packages. As today's practicing engineers cannot afford not to master modeling packages, a basic knowledge of the existing numerical techniques appears as an indispensable engineering skill.

How should this book be read?

Most of the chapters are made up of three parts:

- the first part of the chapter is devoted to the theoretical notions applied in the remainder of the chapter;
- the second part deals with the application of these theoretical notions to various hydraulics and fluid mechanics equations;
- the third part provides a summary of the key points developed in the chapter, as well as suggestions of application exercises.

The main purpose of the application exercises is to test the reader's ability to reuse the notions developed in the chapter and apply them to practical problems. The solutions to the exercises may be accessed at the following URL: <http://vincentguinot.free.fr/waves/exercises.htm>.

Try to resist the temptation to read the solution immediately. Solving the exercise by yourself should be the primary objective. The solution text is provided only as an aid, in case you cannot find a way to start and for you to check the validity of your reasoning after completing the exercise.

Chapter 1

Scalar Hyperbolic Conservation Laws in One Dimension of Space

1.1. Definitions

1.1.1. *Hyperbolic scalar conservation laws*

A one-dimensional hyperbolic scalar conservation law is a Partial Differential Equation (PDE) that can be written in the form:

$$\frac{\partial U}{\partial t} + \frac{\partial F}{\partial x} = S \quad [1.1]$$

where t and x are respectively the time- and space-coordinates, U is the so-called conserved variable, F is the flux and S is the source term. Equation [1.1] is said to be the conservation, or divergent, form of the conservation law. The following definitions are used:

- the flux F is the amount of U that passes at the abscissa x per unit time due to the fact that U (also called the transported variable) is being displaced;
- the source term S is the amount of U that appears per unit time and per unit volume, irrespective of the amount transported via the flux F . If U represents the concentration in a given chemical substance, the source term may express degradation phenomena, or radioactive decay. S is positive when the conserved variable appears in the domain, negative if U disappears from the domain;

2 Wave Propagation in Fluids

– the conservation law is said to be scalar because it deals with only one dependent variable. When several equations in form [1.1] are satisfied simultaneously, the term “system of conservation laws” is used. Systems of conservation laws are dealt with in Chapter 2.

Only hyperbolic conservation laws are dealt with in what follows. The conservation law is said to be hyperbolic if the flux F is a function of U (and none of its derivatives) and, possibly, of x and t . Such a dependence is expressed in the form:

$$\left. \begin{aligned} F &= F(U, x, t) \\ S &= S(U, x, t) \end{aligned} \right\} \quad [1.2]$$

The function $F(U, x, t)$ is called the “flux function”.

NOTE.– The expression $F(U, x, t)$ in equation [1.2] indicates that F depends on U at the abscissa x at the time t and does not depend on such quantities as derivatives of U with respect to time or space. For instance, the following expression:

$$F = aU \quad [1.3]$$

is a permissible expression [1.2] for F , while the following, diffusion flux:

$$F = -D \frac{\partial U}{\partial x} \quad [1.4]$$

where D is the diffusion coefficient, does not yield a hyperbolic conservation law because the flux F is a function of the first-order derivative of U with respect to space.

In the case of a zero source term, equation [1.1] becomes

$$\frac{\partial U}{\partial t} + \frac{\partial F}{\partial x} = 0 \quad [1.5]$$

In such a case (see section 1.1.2), U is neither created nor destroyed over the domain. The total amount of U over the domain varies only due to the difference between the incoming and outgoing fluxes at the boundaries of the domain.

Depending on the expression of the flux function, the conservation law is said to be convex, concave or non-convex (Figure 1.1):

– the law is convex when the second-order derivative $\partial^2 F / \partial U^2$ of the flux function with respect to U is positive for all U ;

- the law is concave when the second-order derivative $\partial^2 F / \partial U^2$ of the flux function with respect to U is negative for all U ;
- the law is said to be non-convex when the sign of the second-order derivative $\partial^2 F / \partial U^2$ of the flux function with respect to U changes with U .

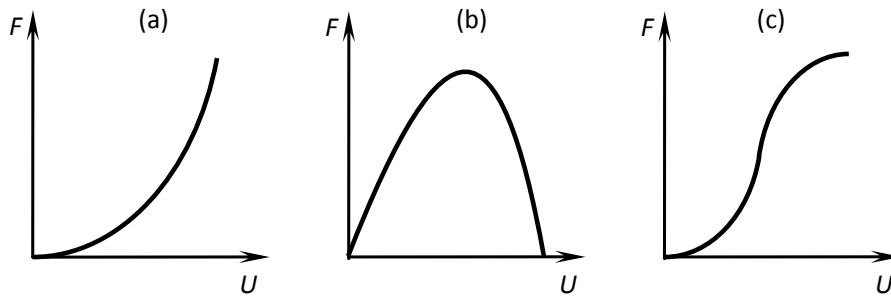


Figure 1.1. Typical examples of flux functions: convex (a), concave (b), non-convex (c)

1.1.2. Derivation from general conservation principles

The conservation form [1.1] is derived from a balance over a control volume of unit section defined between x_0 and $x_0 + \delta x$ (Figure 1.2). The balance is carried out over the control volume between two times t_0 and $t_0 + \delta t$. The variation in the total amount of U contained in the control volume is then related to the derivatives $\partial U / \partial t$ and $\partial F / \partial x$ in the limit of vanishing δt and δx .

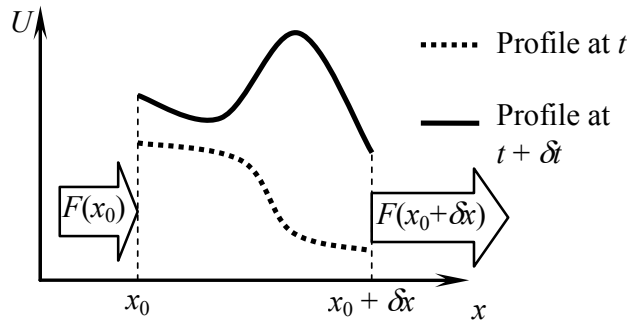


Figure 1.2. Definition sketch for the balance over a control volume

4 Wave Propagation in Fluids

The total amount $M(t_0)$ of U contained in the control volume at $t = t_0$ is defined as:

$$M(t_0) = \int_{x_0}^{x_0 + \delta x} U(x, t_0) dx \quad [1.6]$$

At $t = t_0 + \delta t$, the total amount of U contained in the control volume is:

$$M(t_0 + \delta t) = \int_{x_0}^{x_0 + \delta x} U(x, t_0 + \delta t) dx \quad [1.7]$$

The variation δS in the amount of U induced by the source term S over the domain between t_0 and $t_0 + \delta t$ is given by:

$$\delta S = \int_{t_0}^{t_0 + \delta t} \int_{x_0}^{x_0 + \delta x} S(U, x, t) dx dt \quad [1.8]$$

The amount $\delta F(x_0)$ of U brought by the flux F across the left-hand side boundary of the control volume between t_0 and $t_0 + \delta t$ is given by:

$$\delta F(x_0) = \int_{t_0}^{t_0 + \delta t} F(x_0, t) dt \quad [1.9]$$

A quantity $\delta F(x_0 + \delta x)$ leaves the domain across the right-hand side boundary:

$$\delta F(x_0 + \delta x) = \int_{t_0}^{t_0 + \delta t} F(x_0 + \delta x, t) dt \quad [1.10]$$

Stating the conservation of U over the control volume $[x_0, x_0 + \delta x]$ between t_0 and $t_0 + \delta t$, the following equality is obtained:

$$M(t_0 + \delta t) = M(t_0) + \delta F(x_0) - \delta F(x_0 + \delta x) + \delta S \quad [1.11]$$

Substituting equations [1.6] – [1.10] into equation [1.11] leads to:

$$\int_{x_0}^{x_0 + \delta x} [U(x, t_0 + \delta t) - U(x, t_0)] dx = \int_{t_0}^{t_0 + \delta t} [F(x_0, t) - F(x_0 + \delta x, t)] dt + \int_{t_0}^{t_0 + \delta t} \int_{x_0}^{x_0 + \delta x} S(x, t) dx dt \quad [1.12]$$

A first-order Taylor series expansion around (x_0, t_0) gives:

$$\left. \begin{aligned} U(x_0, t_0 + \delta t) - U(x_0, t_0) &= \delta t \frac{\partial U}{\partial t} + O(\delta t^2) \\ F(x_0, t_0) - F(x_0 + \delta x, t_0) &= -\delta x \frac{\partial F}{\partial x} + O(\delta x^2) \end{aligned} \right\} \quad [1.13]$$

where the quantities $O(\delta t^2)$ and $O(\delta x^2)$ are second- or higher-order polynomials with respect to δt and δx respectively. These polynomials contain the second- and higher-order derivatives of U and F with respect to t and x . When δt and δx tend to zero, the polynomial $O(\delta t^2)$ becomes negligible compared to the quantity $\delta t \partial U / \partial t$ because δt^2 decreases faster than δt . The polynomial $O(\delta x^2)$ becomes negligible compared to $\delta x \partial F / \partial x$ for the same reason. Relationships [1.13] thus become:

$$\left. \begin{aligned} U(x_0, t_0 + \delta t) - U(x_0, t_0) &\underset{\delta t \rightarrow 0}{\approx} \delta t \frac{\partial U}{\partial t} \\ F(x_0, t_0) - F(x_0 + \delta x, t_0) &\underset{\delta x \rightarrow 0}{\approx} -\delta x \frac{\partial F}{\partial x} \end{aligned} \right\} \quad [1.14]$$

A similar reasoning leads to the following equivalence:

$$\int_{t_0}^{t_0 + \delta t} \int_{x_0}^{x_0 + \delta x} S(x, t) \, dx \, dt \underset{\substack{\delta t \rightarrow 0 \\ \delta x \rightarrow 0}}{\approx} \delta t \, \delta x \, S \quad [1.15]$$

Substituting equations [1.14] and [1.15] into equation [1.12] leads to

$$\delta t \frac{\partial U}{\partial t} \delta x = -\delta x \frac{\partial F}{\partial x} \delta t + \delta t \delta x \, S \quad [1.16]$$

Dividing equation [1.16] by $\delta t \delta x$ yields the conservation form [1.1], recalled here:

$$\frac{\partial U}{\partial t} + \frac{\partial F}{\partial x} = S$$

The following remarks can be made:

– the Partial Differential Equation (PDE) [1.1] is a particular case of the more general, integral equation [1.12]. Equation [1.1] is obtained from equation [1.12] using the assumption that δt and δx tend to zero. Equation [1.12] is the so-called weak form of equation [1.1] (see Chapter 3 for more details);

– the conservation form [1.1] is based on the implicit assumption that F is differentiable with respect to x and U is differentiable with respect to t . Consequently, [1.1] is meaningful only when U is continuous in space and time. In contrast, equation [1.12] is meaningful even when U is discontinuous in space and/or time. This has consequences on the calculation of discontinuous solutions, as shown in Chapter 3.

1.1.3. Non-conservation form

Equation [1.1] can be rewritten in the so-called non-conservation form that involves only derivatives of U . The non-conservation form of equation [1.1] is:

$$\frac{\partial U}{\partial t} + \lambda \frac{\partial U}{\partial x} = S' \quad [1.17]$$

where λ is called the wave speed, and S' is a source term that may be identical (but not necessarily) to the source term S in equation [1.1]. Equation [1.17] is obtained from equation [1.1] by rewriting the derivative $\partial F / \partial x$ as:

$$\frac{\partial F}{\partial x} = \frac{\partial F}{\partial U} \frac{\partial U}{\partial x} + F' \quad [1.18]$$

where the term $F' = (\partial F / \partial x)_{U=\text{Const}}$ contains all the derivatives of F other than the derivative with respect to U . The expression of F being known, $\partial F / \partial U$ and F' are easily determined. Substituting equation [1.18] into equation [1.1] yields:

$$\frac{\partial U}{\partial t} + \frac{\partial F}{\partial U} \frac{\partial U}{\partial x} + F' = S \quad [1.19]$$

that is:

$$\frac{\partial U}{\partial t} + \frac{\partial F}{\partial U} \frac{\partial U}{\partial x} = S - F' \quad [1.20]$$

Comparing equation [1.20] to equation [1.17] leads to the following definitions for λ and S' :

$$\left. \begin{aligned} \lambda &= \frac{\partial F}{\partial U} \\ S' &= S - \left(\frac{\partial F}{\partial x} \right)_{U=\text{Const}} \end{aligned} \right\} \quad [1.21]$$

The expressions of F and S being known, the knowledge of U at any point in time and space allows λ and S' to be calculated directly. From definition [1.21], in the case where the variations in F are due to variations in U only, $F' = 0$ and S' is identical to S .

Example: assume that the flux function F is defined as in equation [1.3], recalled here:

$$F = aU$$

where a is a function of x and t . Equation [1.18] then becomes:

$$\frac{\partial F}{\partial x} = \frac{\partial}{\partial x} [a(x, t)U] = a \frac{\partial U}{\partial x} + U \frac{\partial a}{\partial x} \quad [1.22]$$

and λ and F' are given by:

$$\left. \begin{aligned} \lambda &= a \\ F' &= U \frac{\partial a}{\partial x} \end{aligned} \right\} \quad [1.23]$$

If a does not depend on x , $F' = 0$ because $\partial a / \partial x = 0$.

1.1.4. Characteristic form – Riemann invariants

Writing a conservation law in non-conservation form leads to the notions of characteristic form and the Riemann invariant. Such notions are essential to the understanding of hyperbolic conservation laws. A very convenient way of determining the behavior of the solutions of hyperbolic conservation laws consists of identifying invariant quantities (that is, quantities that do not change) along certain trajectories, also called the “characteristic curves” (or more simply the “characteristics”). The solution is calculated by “following” the invariants along the

characteristics, which allows the value of U to be determined at any point. To do so, the non-conservation form [1.17] is used:

$$\frac{\partial U}{\partial t} + \lambda \frac{\partial U}{\partial x} = S'$$

The purpose is to derive the expression of the variation δU in U observed by an observer travelling at a given speed v . A small time interval δt is considered, over which the traveler moves by a distance $\delta x = v \delta t$. The variation δU “seen” by the observer is given by:

$$\delta U = \frac{\partial U}{\partial t} \delta t + \frac{\partial U}{\partial x} \delta x = \left(\frac{\partial U}{\partial t} + v \frac{\partial U}{\partial x} \right) \delta t \quad [1.24]$$

Note that from the observer’s point of view, U is a function of time only, because the observer’s location $x(t)$ is defined by $dx/dt = v$. When δt tends to zero, the ratio $\delta U / \delta t$ tends to the so-called total derivative dU/dt . Therefore equation [1.24] becomes:

$$\frac{\delta U}{\delta t} \underset{\delta t \rightarrow 0}{\approx} \frac{dU}{dt} = \frac{\partial U}{\partial t} + v \frac{\partial U}{\partial x} \quad \text{for } \frac{dx}{dt} = v \quad [1.25]$$

In the particular case of an observer moving at a speed λ , equation [1.25] becomes:

$$\frac{dU}{dt} = \frac{\partial U}{\partial t} + \lambda \frac{\partial U}{\partial x} \quad \text{for } \frac{dx}{dt} = \lambda \quad [1.26]$$

Comparing equations [1.26] and [1.17] leads to:

$$\frac{dU}{dt} = S' \quad \text{for } \frac{dx}{dt} = \lambda \quad [1.27]$$

Equation [1.27] is the so-called characteristic form of equation [1.1]. The trajectory, the equation of which is $dx/dt = \lambda$, is called a characteristic. λ is called the wave speed.

S' being a function of U , x and t , its value may be calculated at any point (x, t) if the value of U is known. The first-order Ordinary Differential Equation (ODE) [1.27] is applicable along the characteristic.

In the (important) particular case where the source term S' is zero, equation [1.17] becomes:

$$\frac{\partial U}{\partial t} + \lambda \frac{\partial U}{\partial x} = 0 \quad [1.28]$$

and equation [1.27] becomes:

$$\frac{dU}{dt} = 0 \quad \text{for} \quad \frac{dx}{dt} = \lambda \quad [1.29]$$

Equation [1.29] can also be written as:

$$U = \text{Const} \quad \text{for} \quad \frac{dx}{dt} = \lambda \quad [1.30]$$

Consequently, the quantity U is invariant to an observer moving at the speed λ . U is called a Riemann invariant.

The physical meaning of the wave speed is the following. The wave speed is the speed at which the variations in U (and not U itself) propagate. A perturbation appearing in the profile of U at a given time propagates at the speed λ . The wave speed can be viewed as the speed at which “information”, or “signals” created by variations in U , propagate in space.

1.2. Determination of the solution

1.2.1. Representation in the phase space

The phase space is a very useful tool in the determination of the behavior of the solutions of hyperbolic conservation laws. The term “phase space” indicates the (x, t) plane formed by the space coordinate x and the time coordinate t (Figure 1.3).

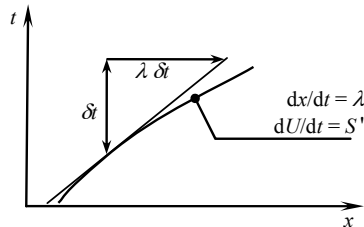


Figure 1.3. Representation of characteristic curves in the phase space

The trajectory $dx/dt = \lambda$ is represented by a curve in the phase space. The distance δx covered by the characteristic over a time interval δt is given by $\delta x = \lambda \delta t$, therefore the slope of the line is $\delta t / \delta x = 1/\lambda$. Note that the sign of λ may change with time depending on the variations in U and the expressions of λ and S' . When λ becomes zero the tangent to the characteristic curve is vertical in the phase space (Figure 1.4a). In contrast, an extremum with respect to time is not physically permissible (Figure 1.4b) because “travelling backwards in time” is not possible.

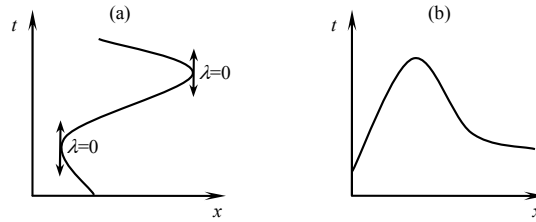


Figure 1.4. Physically permissible (a) and non-permissible (b) characteristics

The representation in the phase space may be used to determine the behavior of the solutions of conservation law [1.1] using the so-called “method of characteristics”. The following simple case is considered:

- the source term S in equation [1.1] is zero;
- the flux depends only on U , therefore $F' = 0$ in equations [1.18] – [1.20].

The characteristic form [1.27] then reduces to equation [1.30], recalled here:

$$U = \text{Const for } \frac{dx}{dt} = \lambda$$

F being a function of U only, λ is also a function of U only. Consequently, if U is constant along a characteristic line, λ is also constant and the characteristic is a straight line in the phase space (Figure 1.5). Assume that the profile $U(x, t_0)$ is known for all x at the time t_0 . The purpose is to determine the profile $U(x, t_1)$ for all x at the time $t_1 > t_0$. Consider the point A, the abscissa of which is denoted by x_A , at which the value of U at (x_A, t_0) is denoted by U_A . Since the wave speed λ depends on U only, the characteristic passing at A is a straight line. Its (constant) wave speed is $\lambda_A = \partial F / \partial U (U_A)$. At time t_1 , the characteristic has moved to point A', the abscissa $x_{A'}$ of which is given by:

$$x_{A'} = x_A + (t_1 - t_0)\lambda_A \quad [1.31]$$