

Carlos Ramos

Paulo Novais

Céline Ehrwein Nihan

Juan M. Corchado Rodríguez *Editors*

Ambient Intelligence - Software and Applications

5th International Symposium
on Ambient Intelligence

Advances in Intelligent Systems and Computing

Volume 291

Series editor

Janusz Kacprzyk, Polish Academy of Sciences, Warsaw, Poland
e-mail: kacprzyk@ibspan.waw.pl

For further volumes:

<http://www.springer.com/series/11156>

About this Series

The series “Advances in Intelligent Systems and Computing” contains publications on theory, applications, and design methods of Intelligent Systems and Intelligent Computing. Virtually all disciplines such as engineering, natural sciences, computer and information science, ICT, economics, business, e-commerce, environment, healthcare, life science are covered. The list of topics spans all the areas of modern intelligent systems and computing.

The publications within “Advances in Intelligent Systems and Computing” are primarily textbooks and proceedings of important conferences, symposia and congresses. They cover significant recent developments in the field, both of a foundational and applicable character. An important characteristic feature of the series is the short publication time and world-wide distribution. This permits a rapid and broad dissemination of research results.

Advisory Board

Chairman

Nikhil R. Pal, Indian Statistical Institute, Kolkata, India
e-mail: nikhil@isical.ac.in

Members

Rafael Bello, Universidad Central “Marta Abreu” de Las Villas, Santa Clara, Cuba
e-mail: rbellop@uclv.edu.cu

Emilio S. Corchado, University of Salamanca, Salamanca, Spain
e-mail: escorchado@usal.es

Hani Hagras, University of Essex, Colchester, UK
e-mail: hani@essex.ac.uk

László T. Kóczy, Széchenyi István University, Győr, Hungary
e-mail: koczy@sze.hu

Vladik Kreinovich, University of Texas at El Paso, El Paso, USA
e-mail: vladik@utep.edu

Chin-Teng Lin, National Chiao Tung University, Hsinchu, Taiwan
e-mail: ctlm@mail.nctu.edu.tw

Jie Lu, University of Technology, Sydney, Australia
e-mail: Jie.Lu@uts.edu.au

Patricia Melin, Tijuana Institute of Technology, Tijuana, Mexico
e-mail: epmelin@hafsamx.org

Nadia Nedjah, State University of Rio de Janeiro, Rio de Janeiro, Brazil
e-mail: nadia@eng.uerj.br

Ngoc Thanh Nguyen, Wroclaw University of Technology, Wroclaw, Poland
e-mail: Ngoc-Thanh.Nguyen@pwr.edu.pl

Jun Wang, The Chinese University of Hong Kong, Shatin, Hong Kong
e-mail: jwang@mae.cuhk.edu.hk

Carlos Ramos · Paulo Novais
Céline Ehrwein Nihan · Juan M. Corchado Rodríguez
Editors

Ambient Intelligence - Software and Applications

5th International Symposium
on Ambient Intelligence

 Springer

Editors

Carlos Ramos
Polytechnic of Porto
Porto
Portugal

Paulo Novais
CCTC/Informatics Department
University of Minho
Braga
Portugal

Céline Ehrwein Nihan
Haute Ecole d'Ingénierie et de Gestion
du Canton de Vaud
Yverdon-les-Bains
Switzerland

Juan M. Corchado Rodríguez
Dept. of Computing Science and Control
Faculty of Science
University of Salamanca
Salamanca
Spain

ISSN 2194-5357

ISBN 978-3-319-07595-2

DOI 10.1007/978-3-319-07596-9

Springer Cham Heidelberg New York Dordrecht London

ISSN 2194-5365 (electronic)

ISBN 978-3-319-07596-9 (eBook)

Library of Congress Control Number: 2014939995

© Springer International Publishing Switzerland 2014, corrected publication 2024

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed. Exempted from this legal reservation are brief excerpts in connection with reviews or scholarly analysis or material supplied specifically for the purpose of being entered and executed on a computer system, for exclusive use by the purchaser of the work. Duplication of this publication or parts thereof is permitted only under the provisions of the Copyright Law of the Publisher's location, in its current version, and permission for use must always be obtained from Springer. Permissions for use may be obtained through RightsLink at the Copyright Clearance Center. Violations are liable to prosecution under the respective Copyright Law.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

While the advice and information in this book are believed to be true and accurate at the date of publication, neither the authors nor the editors nor the publisher can accept any legal responsibility for any errors or omissions that may be made. The publisher makes no warranty, express or implied, with respect to the material contained herein.

Printed on acid-free paper

Springer is part of Springer Science+Business Media (www.springer.com)

Preface

This volume contains the proceedings of the 5th International Symposium on Ambient Intelligence (ISAmI 2014). The Symposium was held in Salamanca, Spain on June 4th-6th at the University of Salamanca, under the auspices of the Bioinformatic, Intelligent System and Educational Technology Research Group (<http://bisite.usal.es/>) of the University of Salamanca.

ISAmI has been running annually and aiming to bring together researchers from various disciplines that constitute the scientific field of Ambient Intelligence to present and discuss the latest results, new ideas, projects and lessons learned, namely in terms of software and applications, and aims to bring together researchers from various disciplines that are interested in all aspects of this area.

Ambient Intelligence is a recent paradigm emerging from Artificial Intelligence, where computers are used as proactive tools assisting people with their day-to-day activities, making everyone's life more comfortable.

After a careful review, 27 papers from 10 different countries were selected to be presented in ISAmI 2014 at the conference and published in the proceedings. Each paper has been reviewed by, at least, three different reviewers, from an international committee composed of 78 members from 24 countries.

Acknowledgments

Special thanks to the editors of the workshops: NTiAI .New Trends in Ambient Intelligence, CAIMaH. Challenges of Ambient Intelligence in the Workplace for the Management of Human Resources, AIFES .Special Session on Ambient Intelligence for Elderly Support.

We want to thank all the sponsors of ISAmI' 14: IEEE Sección España, CNRS, AFIA, AEPIA, APPIA, AI*IA, and Junta de Castilla y León.

ISAmI would not have been possible without an active Program Committee. We would like to thanks all the members for their time and useful comments and recommendations.

We would like also to thank all the contributing authors and the Local Organizing Committee for their hard and highly valuable work.

Your work was essential to the success of ISAmI 2014.

June 2014

The Editors
Carlos Ramos
Paulo Novais
Céline Ehrwein Nihan
Juan M. Corchado Rodríguez

Organization

Organizing Committee Chair

Juan M. Corchado (Chairman) University of Salamanca, Spain
Paulo Novais (Co-chairman) University of Minho, Portugal

Program Committee

Carlos Ramos (Chairman)	Polytechnic Institute of Porto, Portugal
Ad van Berlo	Smart Homes, Netherlands
Andreas Riener	Johannes Kepler University Linz, Austria
Ângelo Costa	Universidade do Minho, Portugal
Antonio F. Gómez Skarmeta	University of Murcia, Spain
Antonio Fernández Caballero	University of Castilla-La Mancha, Spain
António Pereira	Instituto Politécnico de Leiria, Portugal
Benjamín Fonseca	Universidade de Trás-os-Montes e Alto Douro, Portugal
Carlos Bento	University of Coimbra, Portugal
Carlos Ramos	Polytechnic of Porto, Portugal
Catarina Reis	Instituto Politécnico de Leiria, Portugal
Cecilio Angulo	Polytechnic University of Catalonia, Spain
Cesar Analide	University of Minho, Portugal
Cristina Buiza	Ingema, Spain
Davy Preuveneers	Katholieke Universiteit Leuven, Belgium
Diane Cook	Washington State University, USA
Eduardo Dias	New University of Lisbon, Portugal
Elisabeth Eichhorn	Carmeq GmbH, Germany
Emilio S. Corchado	University of Burgos, Spain
Fernando Silva	Instituto Politécnico de Leiria, Portugal
Flavia Delicato	Universidade Federal do Rio de Janeiro, Brasil
Florentino Fdez-Riverola	University of Vigo, Spain
Francesco Potortì	ISTI-CNR institute, Italy

Francisco C. Pereira	SMART (Singapore-MIT Alliance) , Singapore
Francisco Silva	Maranhão Federal University, Brazil
Fulvio Corno	Politecnico di Torino, Italy
Goreti Marreiros	Polytechnic of Porto, Portugal
Gregor Broll	DOCOMO Euro-Labs, Germany
Guillaume Lopez	Aoyama Gakuin University, Japan
Habib Fardoum	University of Castilla-La Mancha, Spain
Hans W. Guesgen	Massey University, New Zealand
Ichiro Satoh	National Institute of Informatics Tokyo, Japan
Jaderick Pabico	University of the Philippines Los Baños, Philippines
Javier Carbo	Univ. Carlos III of Madrid, Spain
Javier Jaen	Polytechnic University of Valencia, Spain
Jo Vermeulen	Hasselt University, Belgium
Joel Rodrigues	University of Beira Interior, Portugal
José Carlos	Instituto Politécnico de Leiria, Portugal
José M. Molina	University Carlos III of Madrid, Spain
José Machado	University of Minho, Portugal
Joyca Lacroix	Philips Research, Netherlands
Juan A. Botía	University of Murcia, Spain
Juan R. Velasco	University of Alcalá, Spain
Junzhong Gu	East China Normal University, China
Kasper Hallenborg	University of Southern Denmark, Denmark
Kristof Van Laerhoven	TU Darmstadt, Germany
Latif Ladid	University of Luxembourg, Luxembourg
Lawrence Wong Wai Choong	National University of Singapore, Singapore
Lourdes Borrajo	University of Vigo, Spain
Marco de Sa	Yahoo! Research, USA
Martijn Vastenburger	Delft University of Technology, Netherlands
Nuno Costa	Instituto Politécnico de Leiria, Portugal
Nuno Garcia	University of Beira Interior, Portugal
Óscar García	University of Salamanca, Spain
Pablo Haya	Universidad Autónoma de Madrid, Spain
Paul Lukowicz	University of Passau, Germany
Paulo Novais	University of Minho, Portugal
Radu-Daniel Vatavu	University “Stefan cel Mare” of Suceava, Romania
Rene Meier	Lucerne University of Applied Sciences, Switzerland
Ricardo Costa	Polytechnic of Porto, Portugal
Ricardo S. Alonso	University of Salamanca, Spain
Rui José	University of Minho, Portugal
Simon Egerton	Monash University, Malaysia
Teresa Romão	New University of Lisbon, Portugal

Thomas Hermann	Bielefeld University, Germany
Tibor Bosse Vrije	Universiteit Amsterdam, Netherlands
Veikko Ikonen	VTT Technical Research Centre, Finland
Vic Callahan	University of Essex, UK
Vicente Julián	Valencia University of Technology, Spain
Wolfgang Reitberger	Vienna University of Technology, Austria
Yi Fang	Purdue University, USA
Yoram Lev-Yehudi	Beacon Tech., Lda, Israel

Local Organization Committee

Dante I. Tapia	University of Salamanca, Spain
Javier Bajo	Polytechnic University of Madrid, Spain
Juan F. De Paz	University of Salamanca, Spain
Fernando De la Prieta	University of Salamanca, Spain
Gabriel Villarrubia González	University of Salamanca, Spain
Antonio Juan Sánchez Martín	University of Salamanca, Spain
Cesar Analide	University of Minho, Portugal
António Manuel de Jesus Pereira	Leiria Polytechnic Institute, Portugal

Workshops

NTiAI .New Trends in Ambient Intelligence

Organising Committee

Davide Carneiro	University of Minho, Portugal
Ângelo Costa	University of Minho, Portugal
José Carlos Castillo	University Carlos III, Spain

CAIMaH .Challenges of Ambient Intelligence in the Workplace for the Management of Human Resources

Organising Committee

Bajo, Javier	Technical University of Madrid
Boos, Daniel	Zürich
Borter, Silna	School of Business and Engineering Vaud
Corchado, Juan Manuel	University of Salamanca
Dufour, Florian	School of Business and Engineering Vaud
Ehrwein Nihan, Céline	School of Business and Engineering Vaud

X Organization

Firoben, Laurence

School of Business and Engineering
Vaud

Kinder-Kurlanda, Katharina E.

GESIS Cologne

AIfES .Special Session on Ambient Intelligence for Elderly Support

Organising Committee

António Pereira

Politechnic Intitute of Leiria, Portugal

Antonio Fernández-Caballero

Universidad de Castilla-La Mancha, Spain

Paulo Novais

University of Minho, Portugal

Contents

Context-Aware Automatic Service Selection Mechanism for Ambient Intelligent Environments	1
<i>Houda Haiouni, Ramdane Maamri</i>	
A Multimodal Conversational Agent for Personalized Language Learning	13
<i>David Griol, Ismael Baena, José Manuel Molina, Araceli Sanchis de Miguel</i>	
Power Indices of Influence Games and New Centrality Measures for Agent Societies and Social Networks	23
<i>Xavier Molinero, Fabián Riquelme, Maria Serna</i>	
Self-Healing Multi Agent Prototyping System for Crop Production	31
<i>Haeng-Kon Kim, Hyun Yeo</i>	
The Impact of Using Gamification on the Eco-driving Learning	45
<i>Víctor Corcoba Magaña, Mario Muñoz Organero</i>	
Person Localization Using Sensor Information Fusion	53
<i>Ricardo Anacleto, Lino Figueiredo, Ana Almeida, Paulo Novais</i>	
Improving Modularity, Interoperability and Extensibility in Ambient Intelligence	63
<i>Marco Gomes, Davide Carneiro, André Pimenta, Milton Nunes, Paulo Novais, José Neves</i>	
RETRACTED CHAPTER: UAVs Applied to the Counting and Monitoring of Animals	71
<i>Pablo Chamoso, William Raveane, Victor Parra, Angélica González</i>	
Easy Development and Use of Dialogue Services	81
<i>José Javier Durán, Alberto Fernández, Sara Rodríguez, Vicente Julián, Holger Billhardt</i>	

Design and Implementation of the Intelligent Plant Factory System Based on Ubiquitous Computing	89
<i>Jeonghwan Hwang, Hoseok Jeong, Hyun Yoe</i>	
Getting and Keeping Aged People Socially Included: Trials with Real End-Users of the EasyReach System.	99
<i>Michele Cornacchia, Filomena Papa, Enrico Nicolò, Bartolomeo Sapia</i>	
A General-Purpose mHealth System Relying on Knowledge Acquisition through Artificial Intelligence	107
<i>Giovanna Sannino, Ivanoe De Falco, Giuseppe De Pietro</i>	
Video Processing Architecture: A Solution for Endoscopic Procedures Results	117
<i>Isabel Laranjo, Joel Braga, Domingos Assunção, Carla Rolanda, Luís Lopes, Jorge Correia-Pinto, Victor Alves</i>	
A Multi-agent Platform for Hospital Interoperability	127
<i>Luciana Cardoso, Fernando Marins, Filipe Portela, Manuel Santos, António Abelha, José Machad</i>	
Mobile Solution Using NFC and In-Air Hand Gestures for Advertising Applications	135
<i>Francisco Manuel Borrego-Jaraba, Gonzalo Cerruela García, Nicolás García Pedrajas, Irene Luque Ruiz, Miguel Ángel Góme-Nieto</i>	
Ubiquitous Sensorization for Multimodal Assessment of Driving Patterns	143
<i>Fábio Silva, Cesar Analide, Celestino Gonçalves, João Sarmento</i>	
CloudFit: A Cloud-Based Mobile Wellness Platform Supported by Wearable Computing	151
<i>Angel Ruiz-Zafra, Manuel Noguera, Kawtar Benghazi, José María Heredia Jiménez</i>	
Developing Ambient Support Technology for Risk Management in the Mining Industry	161
<i>Helena Lindgren, Lage Burström, Bengt Järholm</i>	
RETRACTED CHAPTER: Wireless Sensor Networks to Monitoring Elderly People in Rural Areas	171
<i>Gabriel Villarrubia, Juan F. De Paz, Fernando de la Prieta, Antonio J. Sánchez</i>	
Context-Aware Module for Social Computing Environments	183
<i>Gabriel Villarrubia, Juan F. De Paz, Javier Bajo, Yves Demazeau</i>	

Wireless Multisensory Interaction in an Intelligent Rehabilitation Environment	193
<i>Miguel Oliver, José Pascual Molina, Francisco Montero, Pascual González, Antonio Fernández-Caballero</i>	
Lateral Fall Detection via Events in Linear Prediction Residual of Acceleration	201
<i>F.H. Aysha Beevi, C.F. Pedersen, S. Wagner, S. Hallerstedte</i>	
Fighting Elders' Social and Technological Exclusion: The TV Based Approach	209
<i>Luís Correia, Nuno Costa, António Pereira</i>	
A Decision Support System for Medical Mobile Devices Based on Clinical Guidelines for Tuberculosis	217
<i>Sílvio César Cazella, Rafael Feyh, Ângela Jornada Ben</i>	
New Applications of Ambient Intelligence	225
<i>Davide Carneiro, Paulo Novais</i>	
AmI: Monitoring Physical Activity	233
<i>Ricardo Costa, Luís Calçada, Diva Jesus, Luís Lima, Luís C. Lima</i>	
RETRACTED CHAPTER: Multi-agent Technology to Perform Odor Classification	241
<i>Sigeru Omatu, Tatsuyuki Wada, Sara Rodríguez, Pablo Chamoso, Juan M. Corchado</i>	
Retraction Note to: Ambient Intelligence - Software and Applications	C1
<i>Carlos Ramos, Paulo Novais, Céline Ehrwein Nihan, and Juan M. Corchado Rodríguez</i>	
Author Index	253

Context-Aware Automatic Service Selection Mechanism for Ambient Intelligent Environments

Houda Haiouni and Ramdane Maamri

Lire Laboratory, Constantine 2 University,
Constantine, Algeria

h.haiouni@gmail.com, rmaamri@yahoo.fr

Abstract. To develop context-aware Ambient Intelligence systems, suitable context models and reasoning approaches are necessary to provide the suitable services to users in dynamic and transparent manner. Due the advantages in modeling dynamic systems, Colored Petri Nets are adopted in this paper. So based on Colored Petri Nets modeling language, we propose a context-aware automatic service selection mechanism for intelligent environments. Using this formalism we also propose a solution to avoid conflict that can occur among resources sharing.

Keywords: Ambient Intelligence, Context Awareness, Multi Agent Systems, Colored Petri Nets, conflict resolution.

1 Introduction

The concept of Ambient Intelligence (AmI) has been introduced by European Commission's Information Society Technologies Advisory Group (ISTAG) [10]. AmI describes the future vision of computer science [23]. It deals with the vision that computing and communication ability are spread everywhere among nearly every object in our daily environment. An ambient system is a ubiquitous environment capable to interact intelligently with users and to provide the users with all the available functionalities and services in a *flexible, integrated* and almost *transparent* way for the end-user. For this purpose objects forming ambient systems must have some characteristics such as *autonomy, reactivity*, social abilities and *proactivity*.

The agent-based paradigm is one of the paradigms that can be used for the implementation of distributed systems. Typically, an agent has four properties [11]: *autonomy, social* ability, *reactivity* and *pro-activeness*. A multi-agent system (MAS) is a federation of agents interacting in a shared environment that cooperate and coordinate their actions given their own goals and plans. A MAS design can be beneficial in many domains, particularly when a system is composed of multiple entities that are distributed functionally or spatially [7]. Based on the above definitions, it is clear that agent paradigm is particularly appropriate for AmI. For these reasons, the use of MAS technology in ambient environments has been addressed in many researches like [2, 3], [5], [9], [21].

To provide intelligent and pertinent services to users, AmI-based systems are expected to use contextual information such as location, identity, time, presence, temperature, etc. Dey and al [6] define the context as any information used to characterize the situation of an entity, which can be a person, a place or an object. A system is context-aware if it uses context to provide relevant information and/or services to the user, where relevancy depends on the user's task [8].

In this paper we focus both on context awareness and planning ability on ambient environments and we present a context-aware automatic service selection mechanism. Our proposed mechanism based on Colored Petri Nets (CPN) modeling language (an extension of Petri Nets (PN)). CPN are used to model contextual information and reasoning about. Based on this formalism we have proposed a solution to avoid conflict that can occur among resources sharing. The remaining part of this paper is organized as follows: section 2 shows a brief overview of the PN based context-awareness and MAS planning for AmI. The key concept of PN and CPN is given in section 3. In section 4, we present a context awareness modeling principals and we explain the reasoning process for context aware automatic services selection. An illustrative scenario is given in section 5. Finally, we recapitulate the main arguments and present some outline of future work.

2 Related Work

In this section, we briefly present some related work on multi-agent planning and Petri net-based context modeling for AmI systems.

Weld defines the planning problem as follows [24]. Given a description of the known part of the initial state of the world, a description of the goal (i.e., a set of goal states), and a description of the possible actions that can be performed, modeled as state transformation functions. In the domain of AmI, to develop a planning mechanism we might take into consideration that distributed devices composing such systems are more compact in size, but their CPU and memory are much less powerful, and are often battery-powered. Consequently, these devices could not perform complex computations such those required by planning tasks. Because of AmI systems features, centralized planning is suitable. Many researches have proposed the use of man centralized components such [3, 4]. In [3] for example, the authors study what is the planner most appropriate for AmI systems. They have proposed the D-HTN (Distributed Hierarchical Task Network) planner. They based on the idea that, each smart spaces is equipped by an agent called majordomo that deals with the planning and execution activities and it is composed of one agent called device agent (split in the cooperative semiagent (CO) and the operative semiagent (OP)) for each device present in the environment. Really, for the required flexibility of the system and the number of devices involved, it is obvious that centralized control is not viable. However for limited smart spaces like smart homes, conferences rooms and many others, centralized planning could be adopted as solution. For systems with a large number of individuals we might push toward distributed planning. Authors in [19] present

Context-Aware Multi-Agent Planning (CAMAP), an approach for multi-agent planning that applies argumentation mechanisms to decide the most appropriate course of action according to the context information distributed among the agents. CAMAP is applied to AmI environment in the field of health-care.

Recently, the PN-based context-awareness modeling approaches were proposed in several works and they have been recognized as promising context models [20]. This is due mainly to both formal and graphical nature, expressiveness, and analytical property of PN. Modeling with PN inherently satisfies the requirements of context model, especially the usability of modeling formalisms and representation of relationships among context information [20]. Kwon [14] proposed an extension of CPN called Amended CPN to represent and analyze the context-aware systems. In this work the system is decomposed into several meaningful subsystems as a pattern. Amended CPN consist of multiple CPN, the Pattern and Context net represent contextual state and dynamic contextual change of another dimensional PN. As we proposed also in this work, in [14] each context type (location, weather, etc) is identified as color in Amended CPN and contextual information can be represented by a set of colors. Wang and Zeng [22] proposed a modeling methodology allows nondeterministic time duration for the activity. It permits to estimate the minimum and maximum duration time of each activity when the model is built. Moreover, it includes the resource constraints representing the resources which must be satisfied for executing the services. There are two kinds of places in the PN model for representing the activity and resources, Pa and Pr, respectively. A Pr containing a token means that the corresponding resource is available. Time and resource are critical ingredients in context-aware environment. This approach is one of the rare ones that consider both the time and resource constraints. However it presents few detailed information to represent resources constraints.

The related work presented above is summarized in Table 1. This paper contributes with the design of a model for Context-Aware Multi-Agent Planning, applied to Smart Home scenarios in AmI environments. Our approach uses CPN to model context and different services. We present also a solution to resource conflict occurring when services compete for the same resource in the same period of time.

Table 1. Summary of the related work

	<i>AmI</i>	<i>PN</i>	<i>MAS</i>	<i>Resources constraints</i>
[3]	Yes	No	Yes	No
[4]	Yes	No	Yes	No
[20]	Yes	No	Yes	No
[15]	Yes	Yes	Yes	No
[23]	Yes	Yes	No	Yes
Our approach	Yes	Yes	Yes	Yes

3 Concept of the Petri Nets

In contrast to (ordinary) PN, in which a token are uniform and represent typeless information, CPNs can carry complex information. They provide data typing (color sets) and sets of values of a specified type for each place. Formally a CPN [12] is a structure $(P, T, A, N, \Sigma, V, C, E, G, M0)$, where:

- P, T, A are finite set of places, finite set of transitions and finite set of arcs, respectively. Such as $P \cap T = P \cap A = T \cap A = \emptyset$;
- N : is a node function such as: $A \rightarrow (P \times T \cup T \times P)$;
- Σ : is a finite and non-empty set of data types, also called color sets or colors.
- V : is finite set of typed variables such as: $TYPE [V] \in \Sigma$;
- C : is a color set function. It assigns a color type (set) to each place: $P \rightarrow \Sigma$;
- E : $A \rightarrow$ Expression $E(a)$ of type $C(p(a))$, is the arc function. It maps each arc to an arc expression such: $\forall a \in A : [Type (E(a)) = C(p(a))_{MS} \wedge Type(Var(E(a))) \subseteq \Sigma]$ Where $p(a)$ is the place of $N(a)$;
- G : is a guard function. It assigns a guard to each transition. It is defined from T into Boolean expressions such that: $\forall t \in T : [Type (G(t)) = boolean \wedge Type(Var(G(t))) \subseteq \Sigma]$
- $M0$: is the initial marking. It is defined from P into expressions such that: $\forall p \in P : [Type (I(p)) = C(p)_{MS}]$

A transition t is said to be enabled if and only if the guard function $G(t)$ attached to this transition is evaluated to true, and all of its input places are marked with at least $E(p, t)$ tokens. The firing of an enabled transition t removes $E(p, t)$ tokens from each input place p of t and adds $E(t,p)$ tokens to each output place p of t .

4 Context-Aware Automatic Service Selection Mechanism

The multi agent architecture used for developing context awareness applications for smart spaces can contain mainly three types of agents: Planner Agent, Context Manager Agent and Sensor Agents (Fig 1). Agents communicate by sending and receiving messages following the hierarchy using communication language such as ACL (Agent Communication Language) language. *Sensor agents* residing in sensor level represent all perceptual components. Perceptual components are distributed through the environment, in order to provide a detailed model of the real world and make it available to the application. They provide elementary contextual perceptual information which is a key component of context awareness systems. In *Context Management Level*, an agent gathers data from different sensor agents. It aggregates sensor data over a time period. It can also deduce high-level context information from basic sensed contexts. The reasoning process is carried out by the Planner Agent in *Reasoning & decision level*. The reasoning about context is the process of mapping between context and services. Planner Agent uses information provided by Context manager Agent to select a set of possible services from Services library.

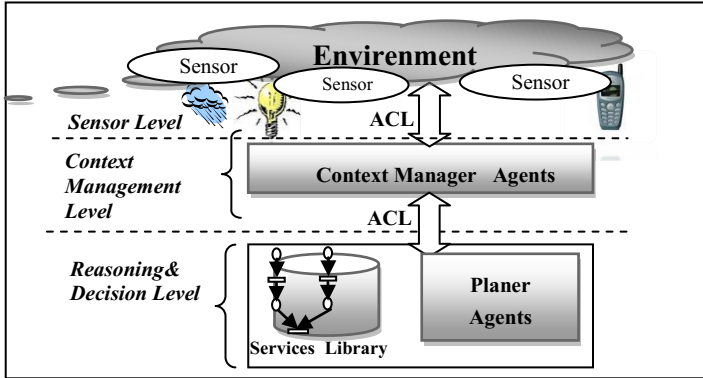


Fig. 1. Multi-Agent Architecture in Smart Home

4.1 Modeling Principles

The real world presents a dense multi-dimensional contextual space. Representing all of them is impossible for many reasons: i) this needs an enormous memory space; ii) some information is irrelevant or less important than others; iii) in practice, some type of context can't be captured, or it is expensive to capture them. So to develop context awareness applications, the first step consist of selecting form infinite contextual information list, those which are the interesting ones. In this setup, designers must determine which types of contextual information to be captured and to be used by the application.

After determining which information should be perceived and collected. The question now is how to represent context and how to reason about. Context modelling and reasoning are the core components of context-aware systems. In the following sub sections, we discuss of key concepts that can be modeled by CPN constructs (Fig. 2).

Context Modeling. Context-aware computing is the ability of applications to discover and react to changes in the environment in which they are situated (17). In order to represent the context and to reasoning about, we propose the adoption of CPN based model. With the flexibility of token definition it is possible to use them to model various contextual information. A context is a set of contextual information such as $\text{Context} = C1 * C2 * \dots * Cn$.

Resources Modeling. In the modeling of plans using CPN, we represent resources by resource places. We can use one resource place for each resource type as we can use one single resource place with a composite data type for convenience. In Fig. 1, PR1, PR2, ..., PRn are resources places. An arc from action transition to resource place means that the execution of the action needs one (or more) resource (s) of that type.

Services Modeling. A service is a set of predefined ordering actions that refer to one (or more) contextual situation (s) (e.g. real world situation(s)). To model a service by CPN we use transitions to represent actions whereas places are used to represent actions stats. All service models will be stored in a plan library witch be used later by planner agent.

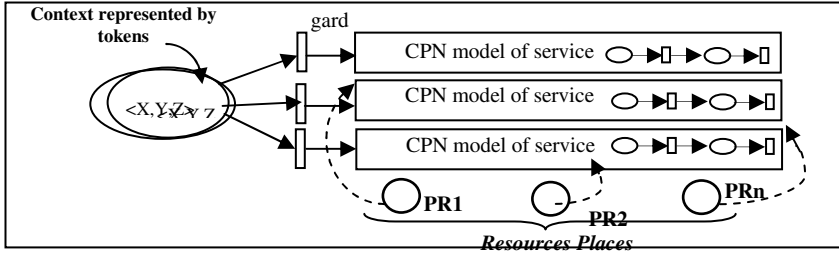


Fig. 2. CPN-based Context Awareness Modeling.

4.2 Reasoning about Context

Reasoning is used to decide what services should be invoked when any change of context occurs. Fig.3 shows the proposed service selection process:

Context Delivering & Management. In order to provide proactive and adequate services to the user, context delivering components have to be integrated. The role of these components is to continuously track information about user and his environment. Context management includes many operations such as sensor data aggregation over a time period and inferring high-level context information from basic sensed contexts ...etc.

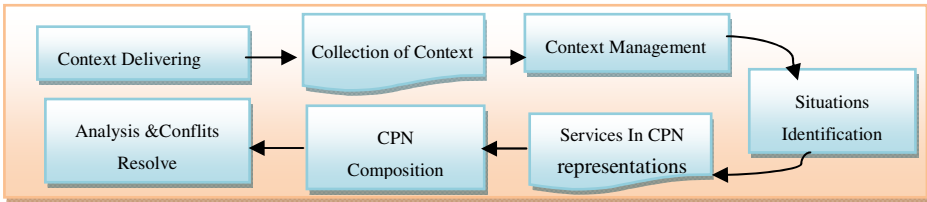


Fig. 3. Services Selection Process

Situations Identification. The reasoning about context is the process of mapping between context and services. A situation can be defined by collecting relevant contexts, uncovering meaningful correlations between them, and labeling them with a descriptive name. The descriptive name can be called a descriptive definition of a situation, which is about how a human being defines a state of affairs in reality [13]. Situation Identification is the processes to deriving a situation by interpreting or merging several pieces of perceived information. Situation identification techniques have been studied extensively in Aml. The most promise one have been highlighted in [13]. In this stage all possible contextual situations will be identified. Each contextual situation represents a service modeled by CPN. Services models are created by designers of context-aware applications. According to token values, all possible services models will be selected from service models library. The Planner Agent will have n CPN service models (n is positive integer).

CPN Composition & Conflict Resolution. It is possible that for some context values many services can be invoked. However in certain cases conflict among resources sharing can bloc system evolution. In the other hand, in many cases some types/values of information are more important than others, or in other words not all services have the same importance. As an example, consider the tow following information: “the gas range is turned on for 10units of times” and “weather is raining”. In this situation, conflict among resources which are windows could happen. Because it is raining windows must be closed. In the other hand the windows must be opened because the gas range has been turned on (if there are not other kinds of aeration). From our point of view, this phenomenon can be avoided by *Establishing Priority for Services*. To do that, we propose in this framework to classify services into several types. For each service class we associate a priority level as fallow: *class 1* \rightarrow *level 0* (higher priority), *class 2* \rightarrow *level 1*, ..., and *class n* \rightarrow *level n-1* (lowest priority)

The priority mechanism can be applied using CPNby assigning priority to transitions. We choose to define priority as a positive real-valued function over transitions, the higher the value, the greater the priority. So we define the priority function ρ mapping a transition into \mathbb{R}^+ . When two transitions are enabled, the one with the highest priority fires. All transitions forming the same service model have the same priority. The role of priority transitions appears in merging services models phase where conflicts among resources can take place. After applying priorities and merging CPN Models the resultant net will be executed to obtain the order in which a set of possible services are executed.

5 Illustrative Scenario: Smart Home

AmI can be applied in any dynamic environment where is a need to manage tasks and automate services (e.g., hospitals schools, homes, etc). Abascal et al [1] assumes that home is the ideal place to apply percepts and technologies for giving high- level services to the user. Smart homes represent the ideal solution for individuals with different needs and abilities (child, old, blind, handicap, etc). So we illustrate our approach through smart home scenario. The main expected benefits of this technology can be: i) *Increasing safety*: e.g., by automating specific tasks that an individual with disabilities or elderly can't perform them. Or by providing a safe and secure environment;ii)*Comfort*: e.g., by adjusting light, temperature , TV channels automatically); iii)*Economy*: e.g., by monitoring the use of energy. To ensure these benefits, the system must provide many services. Services can be classified into three classes according to their objective. The first class represents services providing safety or security. The second class represents all services that provide users comfort, and the last one represents services having economic aspect. From our point of view, assuring safety of peoples has much important than assuring there comfort. For this reason, the first service class must have the higher priority. Concerning the second and the third ones, we assume that comfort aims became before economy one. For instance, if the user prefers high lighting, and energy module detects an over use of energy, the systems

will give more importance to user’s preferences. The house is equipped with smart devices and sensors forming an AmI system. Imagine now that the owner of the house is sleeping. The weather is very cold in outside (-5°), all windows all closed, and carbon monoxide (CO) alarms detects poisonous CO gas in home. The system uses this perceived information to select a set of possible services from Services library. In this case, two services can be invoked. Fig. 4, Fig. 5 represent CPN model of selected services (designed with CPN tools [25]).

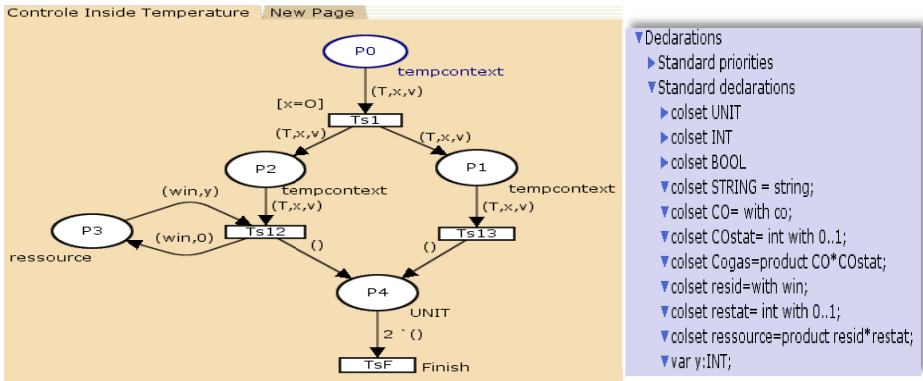


Fig. 4. Control Inside Temperature

The first service aims to regulate inside temperature. It is composed of the two flowing actions: i) Close windows, ii) regulate inside temperature by increasing/or decreasing it. The second one aims to protect inhabitant life by performing flowing actions: i) windows must be opened; ii) occupant must be informed as soon as possible.

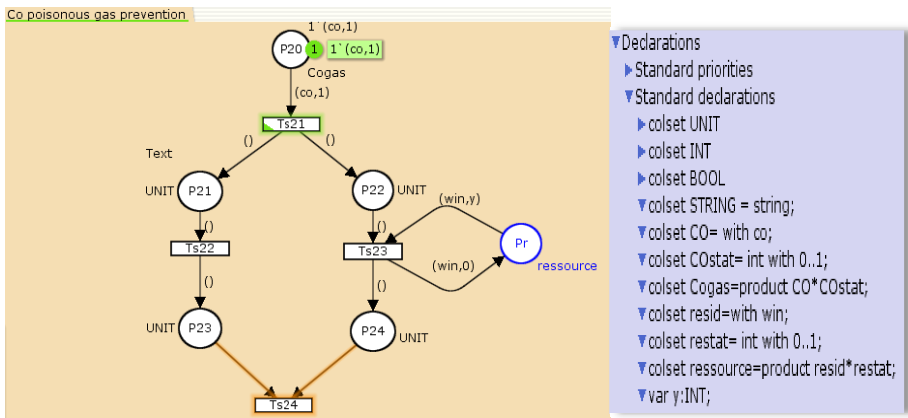


Fig. 5. CO Poisonous Gas Prevention

The CPN model presented in Fig. 6 is obtained by merging service 1 and service2 CPN models. Note that both services compete for the same resource (Pr place) simultaneously. Both of them pretend to take the control over windows. Our solution to this conflict pass through using priorities associating to services to choose which one has the privilege of accessing first the resource. Because service 2 deals with unsafe situation it will have the higher priority, $\rho(T)=1$, and for all transitions t' of service 2 CPN model, $\rho(T)=0$. As consequence service 2 will be executed before service 1.

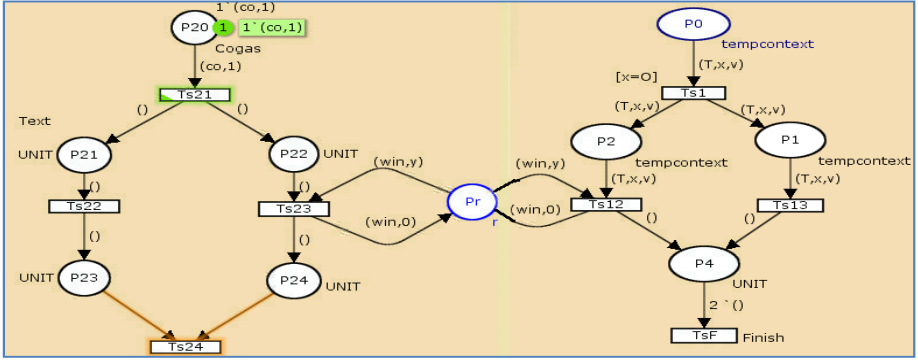


Fig. 6. The resultant Merged CPN

6 Conclusion and Future Work

In this paper we have proposed context-aware automatic service selection approach in intelligent environment. PN have been successfully used for modeling and analysis behavior of various complex dynamic systems. For this reason we have adopted CPN as modeling language to model contextual information and reasoning about. We have proposed a solution to avoid conflict that can occur among resources sharing. Our solution based on the idea of establishing priorities to services. Using CPN formalism, this idea has been represented by associating priorities to transitions. Future research would investigate the establishment of priorities in a flexible manner rather than being done during the development process. In this work only the conflict occurring among resources sharing has been taken into account. However, Conflicts can occur for many others reasons in AmI systems [25]. For instance, when there are conflicting user preferences in the same moment, e.g. One user prefers a lamp to be turned on while another user prefers that it should be turned off. So our efforts now are concentrated on expending the proposed reasoning process based on a formal model to detect other kinds of conflicts on AmI environments and resolve them.

References

1. Abascal, J., Civit, A., Fellbaum, K.: Smart Homes- Technology for the future. In: COST Seminar, Leuven, Belgium. Telecommunications: Access for all (2001)
2. Abraham, A., Corchado, J.M., Alonso, R.S.: Agents and ambient intelligence: case studies. In: Dante, I., Tapia, J. (eds.) *Ambient Intell. Human Comput.*, vol. 1, pp. 85–93 (2010), doi:10.1007/s12652-009-0006-2
3. Amigoni, F., Gatti, N., Pincioli, C., Roveri, M.: What planner for ambient intelligence applications? *IEEE Transactions on Systems, Man and Cybernetics, Part A: Systems and Humans* 35(1), 7–21 (2005)
4. Carbi, G., Ferrari, L., Leonardi, L., Zambonelli, F.: The LAICA project/ supporting ambient intelligence via agents and ad-hoc middleware. In: *Proceedings of WETICE 2005, 14 th IEEE International Workshops on Enabling Technologiesw/ Infrastructurew for Collaborative Entreprises*, vol. 5, pp. 39–46 (2005)
5. Tapia, D.I., Fraile, J.A., Rodríguez, S., Alonso, R.S., Corchado: Integrating, J.M.: hardware agents into an enhanced multi-agent architecture for Ambient Intelligence systems. *Inf. Sci.* 222, 47–65 (2013)
6. Dey, A.K., Abowd, G.D., Salber, D.: A conceptual framework and a toolkit for supporting the rapid prototyping of context-aware applications. *Human-Computer Interaction* 16 (2001)
7. Ferber, J.: *Les Systèmes Multi Agents: vers une intelligence collective*. InterEdition (1995)
8. Abowd, G.D., Dey, A.K.: Towards a Better Understanding of Context and Context-Awareness. In: Gellersen, H.-W. (ed.) *HUC 1999. LNCS*, vol. 1707, pp. 304–307. Springer, Heidelberg (1999)
9. Hu, X., Du Bruce Spencer, W.: A Multi-Agent Framework for Ambient Systems Development. In: *MobiWIS 2011* (2011)
10. ISTAG, Scenarios for Ambient Intelligence in 2010, European Commission Report (2001)
11. Jennings, N.R., Wooldridge, M.J.: Applications of intelligent agents. In: Nicholas, R. (ed.)
12. Jensen, K.: Coloured Petri nets and the invariant method. *T.S.C.* 14, 317–336 (1981)
13. Ye, J., Dobson, S., McKeever, S.: Situation identification techniques in pervasive computing: A review. *Pervasive and Mobile Computing* 8, 36–66 (2012)
14. Kwon, O.B.: Modeling and generating context-aware agent-based applications with amended colored petri nets. *Exp. Syst. Appl.* 27(4), 609–621 (2004)
15. Murata, T.: Petri nets: properties, analysis and applications. *Proceedings of the IEEE* 6(1), 39–50 (1990)
16. Peterson, J.K.: *Petri Nets Theory and the modeling of systems*. Prentice-hall.inc., Englewood cliffs (1981)
17. Satoh, I.: Mobile Agents for Ambient Intelligence. In: Ishida, T., Gasser, L., Nakashima, H. (eds.) *MMAS 2005. LNCS (LNAI)*, vol. 3446, pp. 187–201. Springer, Heidelberg (2005)
18. Schilit, B.N., Theimer, M.M.: Disseminating active map information to mobile hosts. *Netw. IEEE* 8(8), 22–32 (1994)
19. Ferrando, S.P., Onaindia, E.: Context-Aware Multi-Agent Planning in intelligent environments. *Information Sciences* 227, 22–42 (2013)
20. Han, S., Youn, H.Y.: Petri net-based context modeling for context-aware systems. Springer Science+Business Media B.V (2011)

21. Vallée, M., Ramparany, F., Vercoeur, L.: Composition Flexible de Services d'Objets Communicants. In: UbiMob 2005: Proceedings of the 2nd French-Speaking Conference on Mobility and Ubiquity Computing, pp. 185–192 (2005)
22. Wang, H., Zeng, Q.: Modeling and analysis for workflow constrained by resources and nondetermined time: an approach based on petri nets. *IEEE Trans. Syst. Man Cybern. A Syst. Hum.* 38(4), 802–817 (2008)
23. Weiser, M.: The computer for the 21st century. *Scientific American* 256(3), 94–104 (1991)
24. Weld, D.S.: Recent advances in AI planning. *AI Magazine* 20(2), 93–123 (1999)
25. Carreira, P., Resendes, S., Santos, A.: Toward automatic conflict detection in home and building automation systems. *Pervasive and Mobile Computing* (2013)
26. CPN Tools, <http://cpntools.org/>